

Dunkirk-E

FULL CUT-OFF WALL PACK FAMILY LED

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal voltage (120-277V) electronic driver is standard. Optional 0-10V low voltage dimming.
- FINISH — Chip and fade resistant powder coat finish.
- HOUSING — Precision die cast aluminum housing with stainless steel hardware.
- LENS — UV stabilized polycarbonate lens.
- LIGHT ENGINE — Energy efficient LED chips.
- MOUNTING — Easy wall mount installation to standard 4" square electrical J-BOX.
- PHOTOCELL — (Optional) Industrial grade button-type photocell. Specify 120 or 277V.
- REFLECTOR — Forward Throw Reflector.
- COMPLIANCE — Built to comply with U.S. Safety Standards. Suitable for outdoor Wet locations. Dark Sky compliant mounting. DLC Compliant. IP65 Rated.



Dunkirk-E Small / Medium



Dunkirk-E Large / X-Large



ORDERING INFO

Series	Size	LED Wattage	CCT	Voltage	Finish	Options

SERIES

DK-E = Dunkirk-E Series

SIZE

See 2nd Page for Dimensional Diagrams

- S = Small
- M = Medium
- L = Large
- XL = X-Large

LED WATTAGE

Refer to Chart Below for Size / Wattage Compatibility

LED(xx) = LED (xx = Wattage, ex: LED15)

LED COLOR TEMPERATURE (CCT)

4K = ±4000K range LED

DRIVER VOLTAGE

UNV = Universal Volt (120-277V) Electronic Driver

FINISH

- BZ = Bronze
- CC = Custom Color (Consult Factory)

DIMMING OPTIONS

D7 = 0-10VDC LED Dimming Driver

CONTROL OPTIONS

9328 = Photocell Button (120/277V)

EMERGENCY / BATTERY OPTIONS

No onsite Emergency Power (AC or DC) is provided

Meets California Energy Commission Title 20:

(CEC-400-2014-009-CMF) Efficiency Standards


REL4W = Remote LED 4 Watt

LED WATTAGE / LUMENS ¹					
Fixture Size		SMALL	MEDIUM	LARGE	X-LARGE
Dimensions - W x H x D (nominal)		6.66"H x 5.63"W x 3.19"D	8.00"H x 6.49"W x 3.19"D	10.22"H x 7.80"W x 5.00"D	11.76"H x 9.41"W x 5.00"D
Light Emitting Diode	LED	15W (1646 Lumens)	30W (3175 Lumens)	50W (4994 Lumens)	80W (7804 Lumens)

NOTES:

- 1 Lumen output listed are delivered lumens based on 4000K CCT.

DIMENSIONS

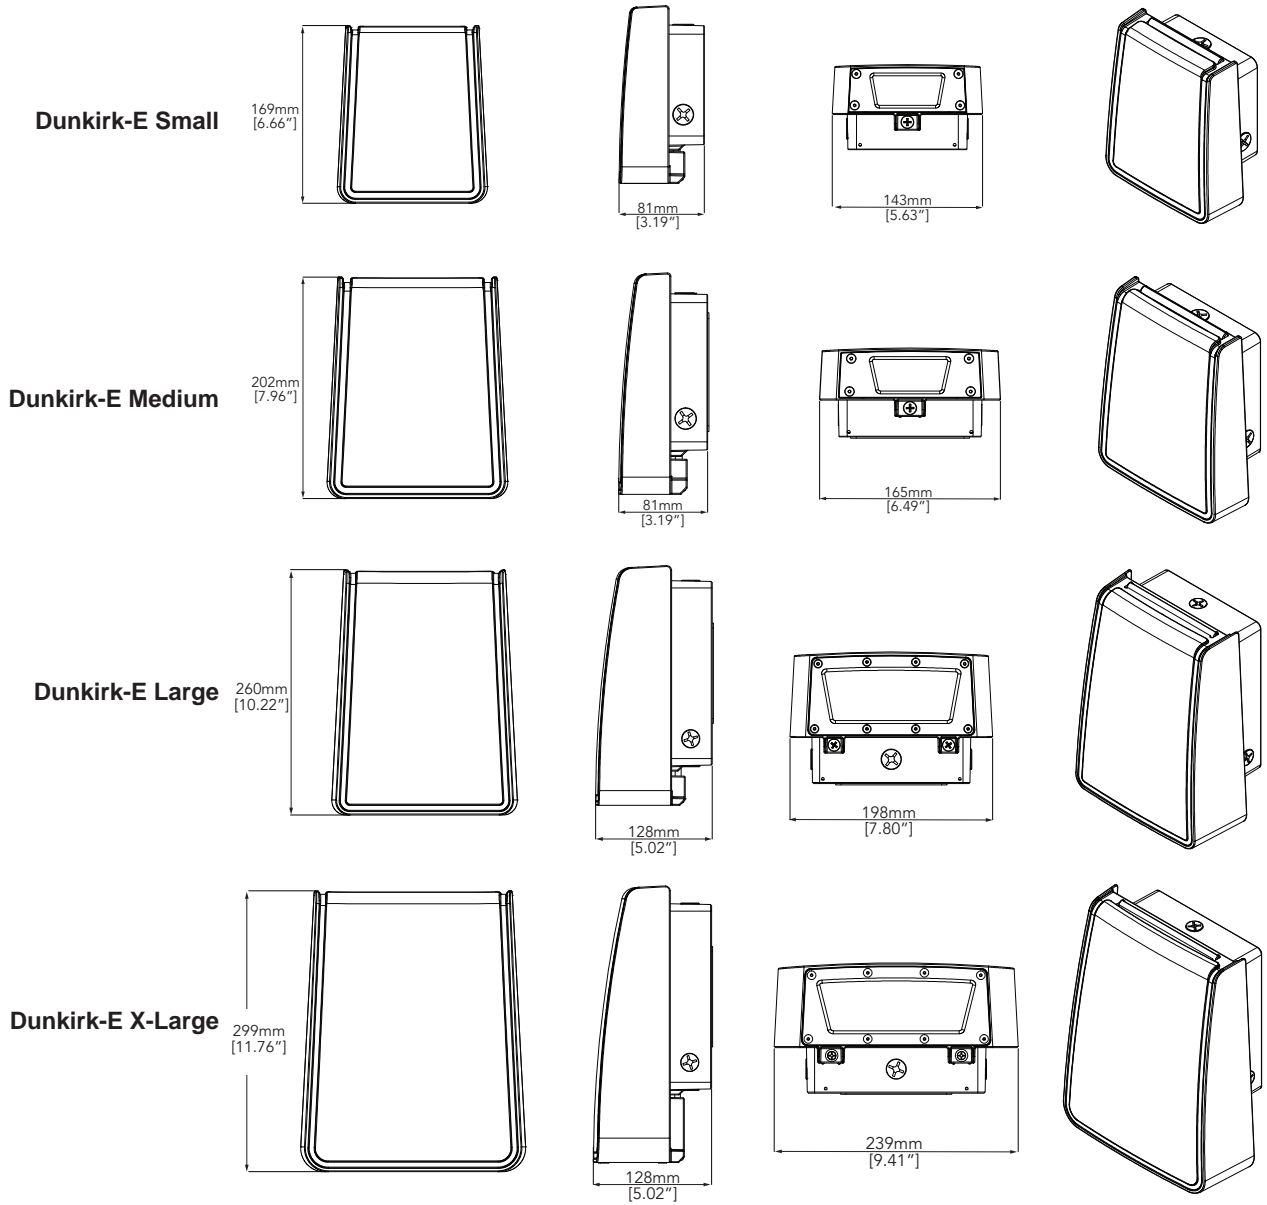

PHOTOMETRY

