

Troy Pendant

CYLINDER PENDANT FAMILY

Pendant Stem with Swivel Canopy

Pendant Aircraft Cable

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- APPLICATIONS — Restaurants, Dining, Foyers, Hallways, Retail, Commercial, Hospitality.
- DRIVER — Universal voltage (120~277V) electronic driver with 0-10V dimming is standard.
- HOUSING — Heavy gauge aluminum cylinder.
- FINISH — Powdercoat finish applied over pre-treated surfaces.
- LIGHT ENGINE — Energy Efficient LED Downlight (DN) is standard. LED Uplight (UP) is Optional.
- LENS — .156" Clear Tempered Glass (85) is Standard.
- DISTRIBUTION — Wide (W) Light Distribution or Extra Wide (XW) Light Distribution.
- MOUNTING — Aircraft Cable Suspension (PEND-ACR) or Pendant (PEND) with Static (STC) or Swivel (SWC-xx) Canopy.
- REFLECTOR — .032 Specular Aluminum Standard.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards. Suitable for Damp Locations. **Made in USA / Buy America Compliant / Buy American Act.**
- WARRANTY — 5-Year Limited Warranty.



Pendant Aircraft Cable
(PEND-ACR)



Pendant Mount (PEND)
Includes Canopy Swivel Kit



ORDERING INFO

Series	Size	Mounting	Wattage	Beam Angle	CCT	Voltage	Finish	Options
ORDERING GUIDE:								

SERIES

TY = Troy Series

SIZE

10 = 10" Tall (7" dia.)
16 = 16 1/2" Tall (7" dia.)
20 = 20" Tall (7" dia.)
26 = 26" Tall (7" dia.)

MOUNTING

PEND-ACR = Pendant Aircraft Cable

NOTE: Selected for UP/DN Combinations

PEND = Pendant Mount (24" Stem)

— For Custom Stem Specify Length

— Includes Canopy Swivel Kit (45°)

NOTE: Selected for DOWN Combinations ONLY

WATTAGE

Note: Refer to Below Chart for Size/Wattage Compatibility

DNxx = LED Downlight(xx=Wattage) - STANDARD

UPxx = LED Uplight(xx=Wattage) - Optional

— LED Uplight for PEND-ACR Only

BEAM SPREAD OPTIONS (3K to 5K Only)

Note: See Page 2 for Images/Examples

S = Spot — 16°

M = Medium — 28°

W = Wide — 58°

XW = X-Wide — 74°

DL = Diffusion Lens (Includes Glare / Dust Control)

COLOR TEMPERATURE (CCT)

3K = ±3000K range

35K = ±3500K range

4K = ±4000K range

5K = ±5000K range

VOLTAGE

UNV = Universal Voltage (120/277V) Electronic Drivers

STANDARD FINISH

BK = Black

BZ = Bronze

PNA = Painted Natural Aluminum

WH = White

PREMIUM UPCHARGE FINISH

CC = Custom Color (Visit www.ralcolor.com)

CONTROL OPTIONS

MANUAL CONTROL (Wall Switch or Control System)

Note: 0-10V 100%-30% is Standard

D7A = 0-10VDC LED Dimming Driver (100-10%)

D7B = 0-10VDC LED Dimming Driver (100-1%)

EMERGENCY BATTERY OPTIONS

No onsite Emergency Power (AC or DC) is provided

Meets California Energy Commission Title 20:

(CEC-400-2014-009-CMF) Efficiency Standards

REL4W = Remote LED 4 Watt

REL8W = Remote LED 8 Watt

REL16W = Remote LED 16 Watt

Cold Weather Emergency Batteries:

Operating Temp: -20°C thru 50°C / NON-CEC Compliant

REL10W-CW = Remote LED 10 Watt (Cold Weather)

NOTES:

1 Consult Factory with requests regarding lamp sources including LED, color temp, wattages or voltages not shown.

2 Consult Factory for Emergency Battery options not shown

3 Due to form and fit, final selection of the Battery Pack under discretion of Factory

SERIES / SIZE	DIMENSIONS	MOUNTING	LED UPLIGHT (UP) WATTAGES	LED DOWNLIGHT (DN) WATTAGES
TROY 10" (TY-10)	7" Dia. x 10"	Pendant Aircraft Cable (PEND-ACR)	15W	15W
TROY 16" (TY-16)	7" Dia. x 16 1/2"	Pendant Aircraft Cable (PEND-ACR)	15W / 25W	15W / 25W
TROY 20" (TY-20)	7" Dia. x 20"	Pendant Aircraft Cable (PEND-ACR)	15w / 25W	15w / 25W
TROY 26" (TY-26)	7" Dia. x 26"	Pendant Aircraft Cable (PEND-ACR)	15W / 25W / 30W	15W / 25W / 30W
TROY 10" (TY-10)	7" Dia. x 10"	Pendant Static/Swivel (PEND-STC/SWC)	N/A	15W
TROY 16" (TY-16)	7" Dia. x 16 1/2"	Pendant Static/Swivel (PEND-STC/SWC)	N/A	15W / 25W
TROY 20" (TY-20)	7" Dia. x 20"	Pendant Static/Swivel (PEND-STC/SWC)	N/A	15w / 25W
TROY 26" (TY-26)	7" Dia. x 26"	Pendant Static/Swivel (PEND-STC/SWC)	N/A	15W / 25W / 30W

Troy Pendant

CYLINDER PENDANT FAMILY


Pendant Stem with Swivel Canopy

Pendant Aircraft Cable

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		


PENDANT CANOPY SWIVEL KIT

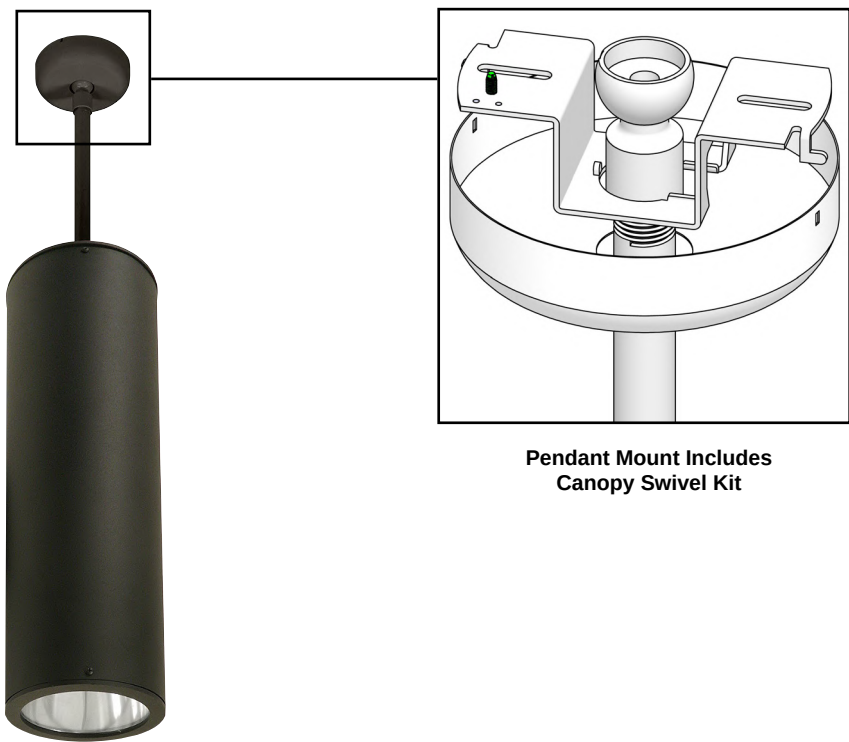

Pendant Mount Includes
Canopy Swivel Kit

OPTIONAL BEAM SPREADS

NOTE: Depiction of lumen distribution as depicted is subject to change minimally based upon selection of LED.

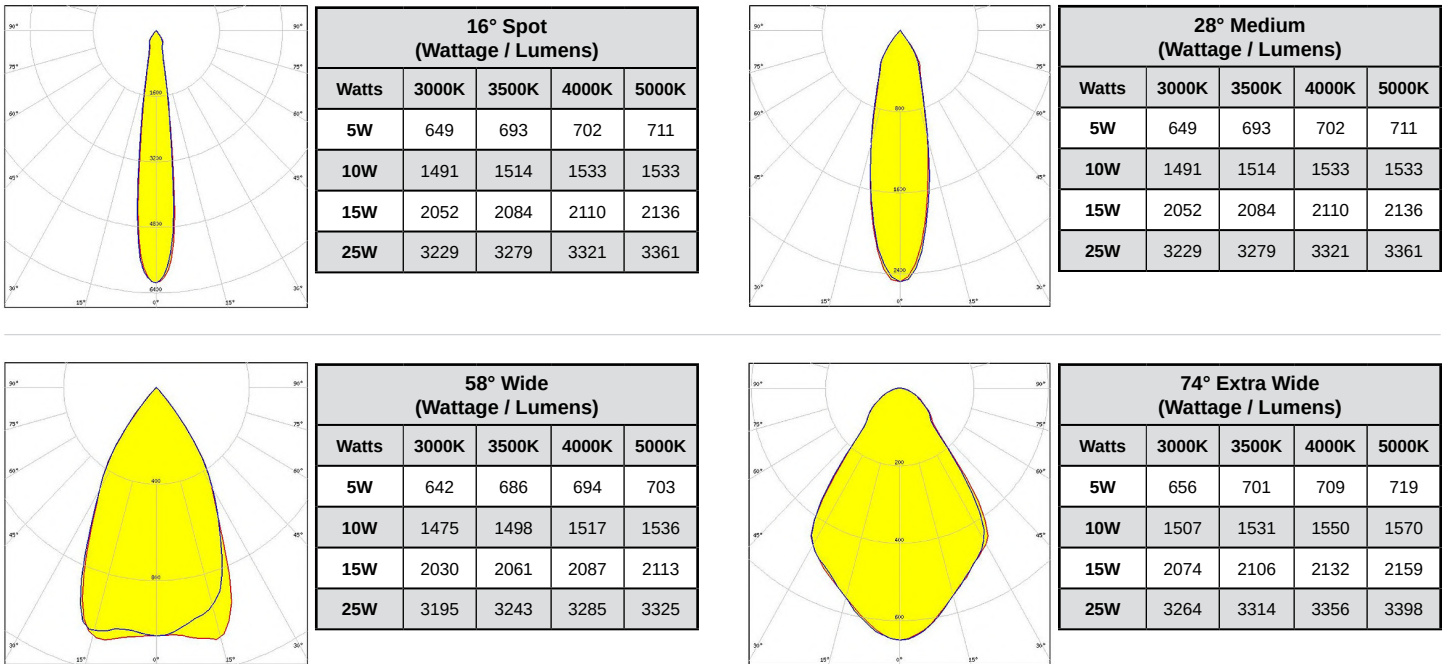

Troy Pendant

CYLINDER PENDANT FAMILY

Pendant Stem with Swivel Canopy

Pendant Aircraft Cable


We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

PHOTOMETRIC DATA


Summary of Results TY10-PEND-ACR-DN15-W-35K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
1750.6 Lumens	116.7 Lm/W	15W	3500K	Type VS	B2-U0-G0

LCS Summary	
Zone	Lumens
Forward Low (0-30)	638.0
Forward Medium (30-60)	249.0
Forward High (60-80)	6.8
Forward Very High (80-90)	0.2
Back Low (0-30)	637.4
Back Medium (30-60)	214.2
Back High (60-80)	5.7
Back Very High (80-90)	0.2
Up Low (90-100)	0.0
Up High (100-180)	0.0

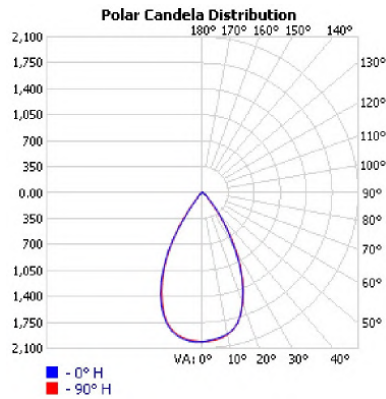


Summary of Results TY16-PEND-ACR-DN15-W-35K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
1750.6 Lumens	116.7 Lm/W	15W	3500K	Type VS	B2-U0-G0

LCS Summary	
Zone	Lumens
Forward Low (0-30)	638.0
Forward Medium (30-60)	249.0
Forward High (60-80)	6.8
Forward Very High (80-90)	0.2
Back Low (0-30)	637.4
Back Medium (30-60)	214.2
Back High (60-80)	5.7
Back Very High (80-90)	0.2
Up Low (90-100)	0.0
Up High (100-180)	0.0

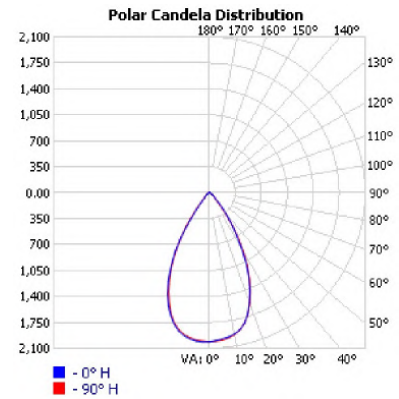


Summary of Results TY16-PEND-ACR-DN25-W-35K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
3100.1 Lumens	124.0 Lm/W	25W	3500K	Type VS	B3-U0-G0

LCS Summary	
Zone	Lumens
Forward Low (0-30)	1,129.8
Forward Medium (30-60)	441.0
Forward High (60-80)	12.1
Forward Very High (80-90)	0.4
Back Low (0-30)	1,128.7
Back Medium (30-60)	379.4
Back High (60-80)	10.1
Back Very High (80-90)	0.4
Up Low (90-100)	0.0
Up High (100-180)	0.0

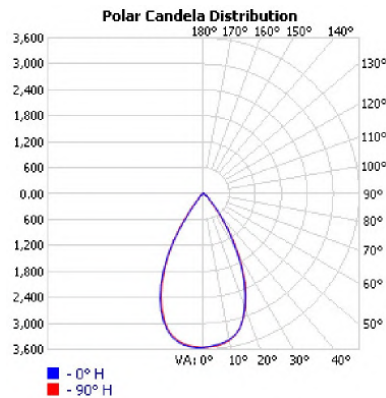

Summary of Results TY20-PEND-ACR-DN15-W-35K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
1750.6 Lumens	116.7 Lm/W	15W	3500K	Type VS	B2-U0-G0

LCS Summary	
Zone	Lumens
Forward Low (0-30)	638.0
Forward Medium (30-60)	249.0
Forward High (60-80)	6.8
Forward Very High (80-90)	0.2
Back Low (0-30)	637.4
Back Medium (30-60)	214.2
Back High (60-80)	5.7
Back Very High (80-90)	0.2
Up Low (90-100)	0.0
Up High (100-180)	0.0

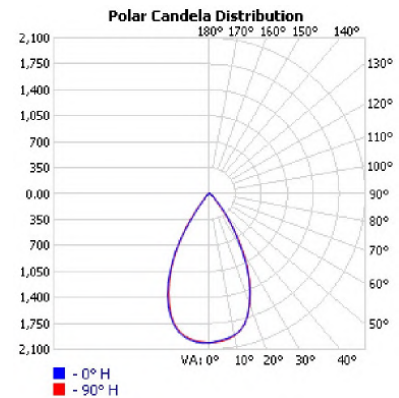

Troy Pendant

CYLINDER PENDANT FAMILY

Pendant Stem with Swivel Canopy

Pendant Aircraft Cable


We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

PHOTOMETRIC DATA


Summary of Results TY20-PEND-ACR-DN25-W-35K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
3100.1 Lumens	124.0 Lm/W	25W	3500K	Type VS	B3-U0-G0

LCS Summary	
Zone	Lumens
Forward Low (0-30)	1,129.8
Forward Medium (30-60)	441.0
Forward High (60-80)	12.1
Forward Very High (80-90)	0.4
Back Low (0-30)	1,128.7
Back Medium (30-60)	379.4
Back High (60-80)	10.1
Back Very High (80-90)	0.4
Up Low (90-100)	0.0
Up High (100-180)	0.0

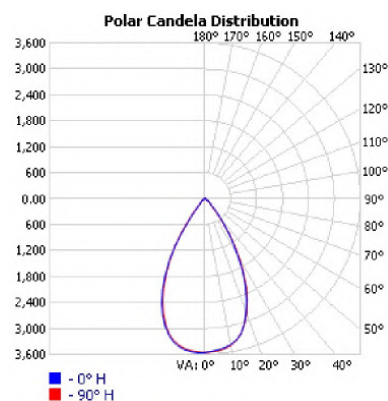


Summary of Results TY26-PEND-ACR-DN15-W-35K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
1750.6 Lumens	116.7 Lm/W	15W	3500K	Type VS	B2-U0-G0

LCS Summary	
Zone	Lumens
Forward Low (0-30)	638.0
Forward Medium (30-60)	249.0
Forward High (60-80)	6.8
Forward Very High (80-90)	0.2
Back Low (0-30)	637.4
Back Medium (30-60)	214.2
Back High (60-80)	5.7
Back Very High (80-90)	0.2
Up Low (90-100)	0.0
Up High (100-180)	0.0

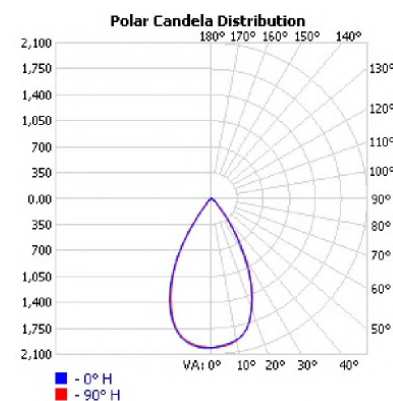

Summary of Results TY26-PEND-ACR-DN25-W-35K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
3100.1 Lumens	124.0 Lm/W	25W	3500K	Type VS	B3-U0-G0

LCS Summary	
Zone	Lumens
Forward Low (0-30)	1,129.8
Forward Medium (30-60)	441.0
Forward High (60-80)	12.1
Forward Very High (80-90)	0.4
Back Low (0-30)	1,128.7
Back Medium (30-60)	379.4
Back High (60-80)	10.1
Back Very High (80-90)	0.4
Up Low (90-100)	0.0
Up High (100-180)	0.0

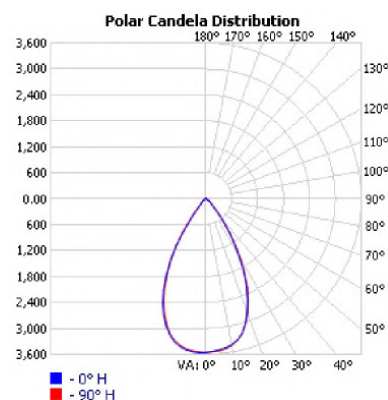

Summary of Results TY26-PEND-ACR-DN30-W-35K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
3501.2 Lumens	116.7 Lm/W	30W	3500K	Type VS	B2-U0-G0

LCS Summary	
Zone	Lumens
Forward Low (0-30)	1,275.9
Forward Medium (30-60)	498.0
Forward High (60-80)	13.6
Forward Very High (80-90)	0.5
Back Low (0-30)	1,274.7
Back Medium (30-60)	428.5
Back High (60-80)	11.4
Back Very High (80-90)	0.4
Up Low (90-100)	0.0
Up High (100-180)	0.0

