

# CMD



We reserve the right to revise the design or components of any product without notice.

## Indoor/Outdoor Drum Fixture Ceiling or Wall Family—Damp Location ADA Compliant

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		


### SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver is standard for LED.
- DIFFUSER — Opal Acrylic Standard. Optional Polycarbonate.
- EMERGENCY — Remote or Integral Emergency Battery (Medium and Large only).
- FINISH — White Polyurethane Finish. Consult Factory for custom finish.
- HARDWARE INCLUDED — (1) J Boxstrap, (1) Nipple, (1) Cap Nut.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED).
- MOUNTING — Center Access Hole For Mounting To A “J” Box.
- PAN — White Polyurethane Finished.
- PENDANT — Standard Pendant Model Aircraft Cable Suspension with white power cord and ceiling canopy. 1/2” conduit size entrance holes. 12” Overall Height (OH) is Standard. Specify stem (ST) or Optional cord (CD).
- SCREWS — Brass Thumb Screw.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for damp locations. (Covered Ceiling Only).




Ceiling Mount Drum (CMD)

### OPTIONS

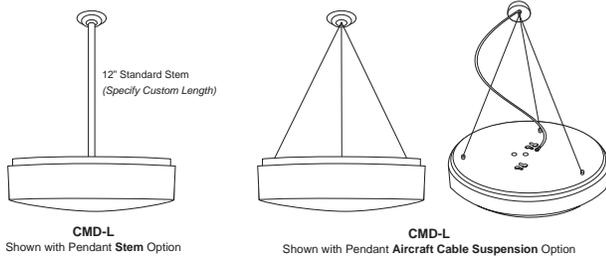

### DIMENSIONS

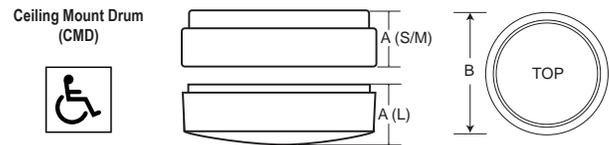

LED WATTAGE <sup>1</sup> (values are based on nominal system Watts)					
Fixture Size	Wattage	Lumens (Based on 3K)	Lumens (Based on 35K)	Lumens (Based on 4K)	Lumens (Based on 5K)
Small (11” Dia. x 3” Depth)	15 Watt	1511 Lumens	1542 Lumens	1590 Lumens	1670 Lumens
Medium (14” Dia. x 3” Depth)	15 Watt	1511 Lumens	1542 Lumens	1590 Lumens	1670 Lumens
Medium (14” Dia. x 3” Depth)	25 Watt	1957 Lumens	1998 Lumens	2060 Lumens	2100 Lumens
Large (19” Dia. x 5” Depth)	30 Watt	2850 Lumens	2910 Lumens	3000 Lumens	3150 Lumens

Series	Size	Lamp/Wattage	Color Temp	Voltage	Finish	Options

### SERIES

- CMD = Ceiling Mount Drum Series
- CMM = Ceiling Mount Mushroom Series
- CMS = Ceiling Mount Shallow Series (ADA)

### SIZE

- S = Small (±11” Diameter)
- M = Medium (±14” Diameter)
- L = Large (±19” Diameter)

### LED WATTAGE

Refer to Above Chart for Size/Wattage Compatibility  
LEDxx = LED(xx=Wattage)

### LED COLOR TEMPERATURE

- 3K = ±3000K range
- 35K = ±3500K range
- 4K = ±4000K range
- 5K = ±5000K range

### VOLTAGE

- 120 = 120 Volts
- 277 = 277 Volts
- 347 = 347 Volts (Consult Factory)
- EBU = Universal Voltage (120-277v)
- 2EBU = Two 120/277v Electronic Drivers

### FINISH

- WH = White Finish Standard

### OPTIONS

- FUS = Single GLR Fuse and Fuse Holder
- DFUS = Double Fusing and Holder
- GTD = Generator Transfer Device (Bodine)
- PC = Polycarbonate Diffuser
- PENDC = Pendant with Aircraft Cable Suspension<sup>2</sup>
- PEND-ST = Stem optional on Pendant — 12” Standard, —Specify Overall Height (OH) —Specify Canopy: Static (STC) / Swivel (SWC)
- TP = Tamperproof Screws

### DIMMING OPTIONS

- D7 = 0-10V low-voltage LED Dimming 100-30% Std, Consult Factory for Other
- D8 = LED Dimming: Forward Phase/Leading Edge (Triac) —Consult Factory
- D9 = LED Reverse Phase/Trailing Edge ELV —Consult Factory
- D11 = DALI LED Dimming Driver - Consult Factory
- D12 = Lutron Dimming Driver - Consult Factory

### EMERGENCY OPTIONS<sup>3 5</sup>

**No onsite Emergency Power (AC or DC) is provided**  
Specify Fixture Voltage: 120V or 277V Power Feed  
A=120V or B=277V

Meets California Energy Commission Title 20:  
(CEC-400-2014-009-CMF) Efficiency Standards

- REL4W = Remote LED 4 Watt
- REL8W = Remote LED 8 Watt
- REL16W = Remote LED 16 Watt
- REL20W = Remote LED 20 Watt

### Cold Weather Emergency Batteries:

Operating Temp: -20°C thru 50°C  
NON-CEC Compliant  
REL10W-CW = Remote LED 10 Watt (Cold Weather)  
REL23W-CW = Remote LED 23 Watt (Cold Weather)

### NOTES:

- Consult Factory with requests regarding lamp sources, wattages or voltages not shown.
- Consult Factory for additional Emergency Battery options not shown.
- Aircraft cable for Pendant Mount available up to 10'. Specify Length.
- Due to form and fit, final selection of the Battery Pack under discretion of Factory.

