

Lakeshore

Low Profile LED Luminaire

Selectable LED Wattage / CCT

Indoor/Outdoor - Damp Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver with 0-10V dimming (100-30%).
- DIFFUSER — Opal white acrylic. Secures to housing pan without visible hardware.
- EMERGENCY — Optional Remote Emergency Battery.
- FINISH — Polyester powder coat white is Standard. Premium upcharge finishes available.
- LIGHT ENGINE — Energy Efficient LED - Selectable Wattage / CCT.
- HOUSING — Heavy gauge CRS pan.
- MOUNTING — Furnished with J-Box mounting hardware for surface ceiling or wall mount.
Pendant and Aircraft Cable options available.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for damp locations. (Covered Ceiling Only).



ORDERING INFO

Series	Size	Wattage	CCT	Voltage	Finish	Options
LS		SLED	SCCT	UNV		

SERIES

LS = Lakeshore Series

SIZE

S = Small: 13" Diameter x 3 3/8" Depth
 M = Medium: 17" Diameter x 3 3/8" Depth
 L = Large: 21" Diameter x 3 3/8" Depth

WATTAGE

SLED = *Selectable LED Wattage
 — Wattages (Small): 15W | 17W | 20W
 — Wattages (Medium): 20W | 30W
 — Wattages (Large): 20W | 30W

COLOR TEMPERATURE (CCT)

SCCT = *Selectable CCT: 3000K | 3500K | 4000K | 5000K

*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

VOLTAGE

UNV = Universal Voltage (120-277v) Driver

STANDARD FINISH

WH = White Finish

PREMIUM UPCHARGE FINISH

BK = Black Finish
 BZ = Bronze Finish
 PNA = Painted Natural Aluminum
 CC = Custom Color (Visit www.ralcolor.com)
 — Provide RAL# or Make-to-Match Color Chip²⁸

MOUNTING OPTIONS

AC10 = 10ft Aircraft Cable Mount
 — Includes 120" Adjustable Cables with Canopy
 PEND12 = Pendant Mount (12" Stem)
 — Includes Canopy Swivel Kit (45°)
 PEND(XX) = Pendant Mount with Custom Stem Length (XX")
 — Includes Canopy Swivel Kit (45°)

UPLIGHT OPTION

UPL = Uplight
 — Includes 7W Uplight and Dust Cone

SENSOR CONTROL OPTIONS

OCC = Occupancy Sensing | Motion Sensor Integral²⁰
 — Microwave / Single Feed / 120/277V Only
 — Standby Dim Level Presets: ON/OFF
 BLD = Bi-Level Dimming | Motion Sensor Integral²⁰
 — Microwave / Single Feed / 120/277V Only
 — Standby Dim Level Presets:
 10% / 20% / 30% (Standard) / 50%

EMERGENCY BATTERY OPTIONS^{50 55}

Meets California Energy Commission Title 20:
 (CEC-400-2014-009-CMF) Efficiency Standards

REL4W = Remote LED 4 Watt
 REL8W = Remote LED 8 Watt


ACCESSORY OPTIONS (order as a separate line)

REMT0009 = Remote Controller for Sensor Options

NOTES:

- ²⁰ Max mounting height of fixture is 18' (18 feet).
- ²⁸ Subject to Setup Fee and Deposit.
- ⁵⁰ Max WHIP length of the REL is 8 feet.
- ⁵⁵ Final selection of the Battery Pack under discretion of Factory.

DIMENSIONS

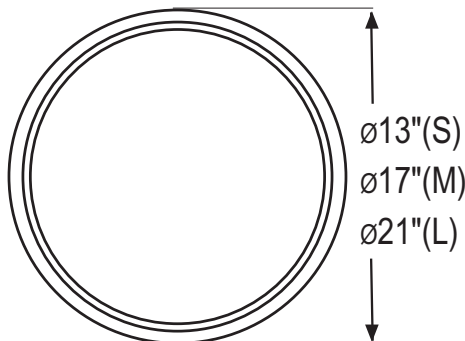

Lakeshore

Low Profile LED Luminaire

Selectable LED Wattage / CCT

Indoor/Outdoor - Damp Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

OPTIONS



Ceiling Mount - STANDARD




Pendant Mount (PEND12)
Shown with Standard 12" Stem



10' Aircraft Cable Suspension (AC10)
Shown with Uplight (UPL) Option

PENDANT CANOPY SWIVEL KIT

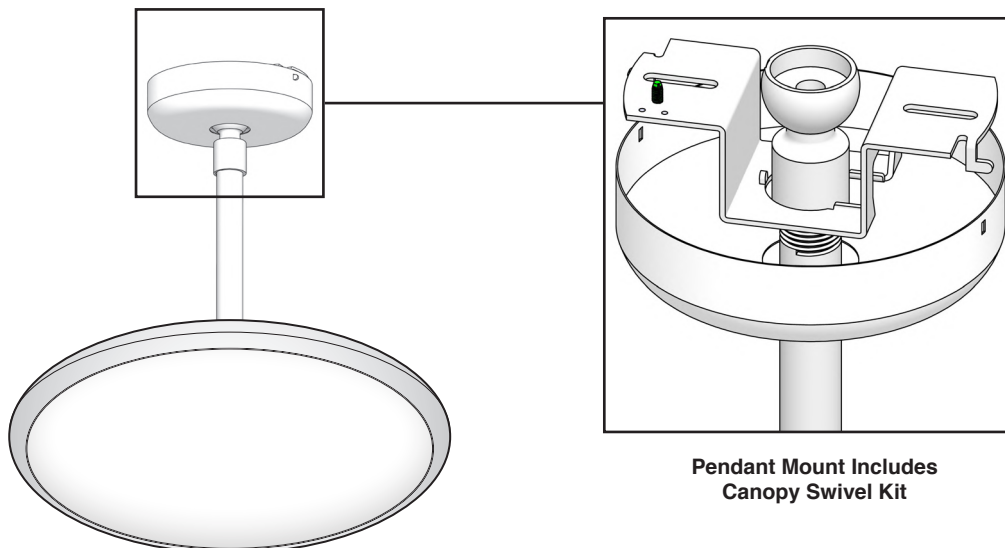

**Pendant Mount Includes
Canopy Swivel Kit**