

Lisbon

FULL CUT-OFF SERIES

Wall Mount;
Vandal Resistant HID, CFL, LED

ARRA
Compliant



We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		



SPECIFICATIONS

- BACKPLATE — Cast aluminum.
- BALLAST — For Compact Fluorescent Electronic: Cold Weather HPF is Standard. For HID Pulse Start is Standard. High Temperature Electronic Ballast operates from -30° C up to 90° C max case temperature.
- EMERGENCY — CFL, LED — Remote Only
- GASKETING — High temperature, non-aging black silicone to protect against outside contaminants.
- HOUSING — Heavy die cast aluminum. Finished in Bronze oven baked Polyester Powder Coat.
- LAMP — HID, MEDIUM BASE Metal Halide; Compact Fluorescent: Triple Twin Tube (TTT), LED – INCLUDED.
- LENS — Clear Tempered Glass (94) Standard.
- REFLECTOR — 032 Prescription Specular aluminum for high efficiency and reduce arc tube voltage rise. Forward Throw (FT) or Wide Spread (WS) available.
- UL/ULC Listed to U.S. and Canadian safety standards. Suitable for wet locations.

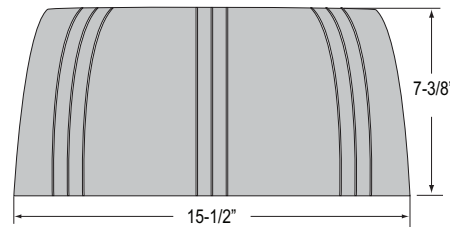

Shown with Backbox (BB)

LAMP TYPE/QTY/WATTAGE ¹		
Visit www.eclipselightinginc.com for available IES files		
Fixture	LISBON	
Dimensions - W x H x D	15½" x 7¾" x 10"	
Compact Fluorescent Triple Twin Tube	TTT	(1)32/42w
Pulse Start Metal Halide	MH	50/70/100/150w ²⁰
Light Emitting Diode	LED	20/30/40w

ORDERING GUIDE:

Series	Style	Reflector	Lamp/Qty/Watt	Color Temp	Voltage: Primary/Emergency	Finish	Options
LB							

NOTES:

- Consult Factory with requests regarding lamp sources, including LED, color temp., wattages or voltages not shown.
- Backbox required
- Consult Factory for additional Emergency Battery options not shown.
- Visit our website for spec sheet featuring Lighting Facts Certified Model
- Max mounting height of fixture is 10 feet
- Visit our website for spec sheet featuring Lighting Facts Certified Model
- EC1 thru EC4 available with 100 Watt HID Max, and 70 Watt HPS Max.
- Max WHIP length with the REL provided by the factory is 8 feet.
- Consult Factory for other Voltage
- Due to form and fit, final selection of the Battery Pack under discretion of Factory

SERIES

LB = Lisbon Series¹⁵

STYLE

A = Direct (Downlight)
B = Indirect (Uplight: INDOOR ONLY)

REFLECTOR

FT = Forward Throw Distribution
WS = Wide Spread Distribution

LAMP TYPE/QUANTITY/WATTAGE

Refer to Chart Above

COLOR TEMP (LED)

3K = ±3000K range LED
4K = ±4000K range LED
5K = ±5000K range LED
6K = ±6000K range LED

VOLTAGE

120 = 120 Volts EB
277 = 277 Volts EB
347 = 347 Volts EB

EBMH = Electronic Ballast for Metal Halide

EBU = High Temp Universal Volt (120-277V)
2EB = 2 Electronic Ballast for Dual Circuit CFL(2)26w, Specify Voltage

FINISH

BZ = Bronze Finish – STANDARD

OPTIONS

9206 = Photocell – 120V²
9221 = Photocell – 277V²
BB = Backbox for Surface Conduit
ES1 = One MR16 2-Pin Emergency Socket (Lamps Not Incl'd)
ES2 = Two MR16 2-Pin Emergency Sockets (Lamps Not Incl'd)
FUS = Single Fusing
GTD = Generator Transfer Device (Bodine)

LED OPTIONS³

BL = Dual Circuit for Bi-Level light (High/Low), includes 2EBU
D7 = 0-10V low-voltage dimming (100-30% Standard, Consult Factory for Other)
MSE = Motion Sensor External
— Single circuit-all on, all off
Specify Finish: White (WH)/Bronze (BZ)
MSE2 = Motion Sensor External
— Dual circuit, half on half off
Specify Finish: White (WH)/Bronze (BZ)
MSI = Motion Sensor Integral²⁰
Single circuit-all on, all off
MSI2 = Motion Sensor Integral²⁰
Dual circuit, half on half off
SG = 10KA Surge Protection for LED fixtures (meets ANSI spec C62.41.2)

EMERGENCY BATTERY OPTIONS³⁵

No onsite Emergency Power (AC or DC) is provided
Specify Fixture Voltage: 120V or 277V Power Feed A=120V or B=277V

Fluorescent Emergency Battery

REL2 = Remote: DTT/TTT; 1-2 Lamp; 650 Lms
REL35 = Remote, Cold Weather: TT/DTT/TTT; 1-2 Lamp; 1250 Lms
REL52 = Remote, Cold Weather (Bodine) DTT/TTT; 1-2 Lamp; up to 1250 Lms

LED Emergency Battery²

REL61 = Remote: LED 12W, ± 720 Lms (lota)
REL63 = Remote: LED 23W, ± 1290 Lms (Bodine)
REL67 = Remote, Cold Weather: LED 23W, ± 1290 Lms (lota)
REL82 = Remote: LED 4W (Fulham)—Factory Recom'd
REL85 = Remote: LED 20W (Fulham)—Factory Recom'd
REL88 = Remote: LED 16W (Fulham)—Factory Recom'd

LED EMERGENCY CIRCUIT⁴⁵

Onsite Generator Power (AC) or Battery Power (DC) is provided via separate circuit to the fixture

ECTA = (1) 5W LED for Line Voltage (120VAC)
EC2A = (1) 5W LED for Line Voltage (277VAC)
EC3A = (2) 5W LED for Line Voltage (120VAC)
EC4A = (2) 5W LED for Line Voltage (277VAC)
EC1D = (1) 5W LED for Low Voltage (12VDC)
EC2D = (1) 5W LED for Low Voltage (24VDC)
EC3D = (2) 5W LED for Low Voltage (12VDC)
EC4D = (2) 5W LED for Low Voltage (24VDC)