

Odessa

SMALL BASIC VANDAL RESISTANT Architectural Euro/High Abuse Series Indoor/Outdoor LED Wall Sconce

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- BACKPLATE — Die cast aluminum.
- DRIVER — Universal Voltage 120/277V Electronic Driver is Standard.
- EMERGENCY — LED — Remote.
- GASKETING — High temperature, non-aging black EPDM and/or neoprene rubber concealed in housing pocket and enclosed by cast-in drip shield and rear wire entrance hole to protect against outside contaminants.
- HOUSING — Die cast aluminum with concealed mounting plate. Standard finish is Bronze oven baked Polyester Powder Coat.
- LENS — Clear Prismatic Polycarbonate Lens.
- REFLECTOR — 032 Prescription Specular aluminum for high efficiency and reduce arc tube voltage rise.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations. IP65 tested and rated.




OPTIONS



Shown with Optional Dark Sky/DLC Visor

DIMENSIONS

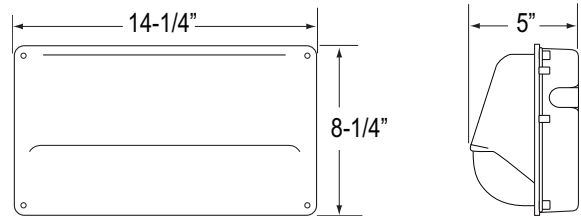

ORDERING GUIDE:

Series	Lamp/Wattage	Color	Voltage	Finish	Options

SERIES

OA = Odessa; 14.25" x 8.25" x 5"

LED WATTAGE^①

LED20 = 20 Watt LED

LED40 = 40 Watt LED

COLOR TEMPERATURE

3K = ±3000K range

4K = ±4000K range

5K = ±5000K range

VOLTAGE

347 = 347 Volts (20W Only)

EBU = Universal Volt (120-277v)

FINISH (HOUSING COLOR)

BZ = Bronze—Standard

CC = Custom Color (Consult Factory)

OPTIONS

9328 = Universal Photocell – 120/277V

FUS = Single Fusing

DK = Dark Sky Visor

DFUS = Double Fusing

LED OPTIONS

BL1 = Bi-Level Light (High/Low)

— Single AC Input Feed, with Switch Sensor (Required)

BL2 = Bi-Level Light (High/Low)

— Wired for Dual AC Input Feeds

D7 = 0-10V low-voltage dimming (100-30% Standard, Consult Factory for Other)

MSE = Motion Sensor External^② for LED

Single circuit-all on, all off

Specify Finish: White (WH) or Bronze (BZ)

MSE2 = Motion Sensor External^② for LED

Dual circuit, half on half off

Specify Finish: White (WH) or Bronze (BZ)

EMERGENCY BATTERY OPTIONS^{③⑤}

No onsite Emergency Power (AC or DC) is provided

Specify Fixture Voltage: 120V or 277V Power Feed

A=120V or B=277V

LED Emergency Battery^⑤

Factory Recommended

REL82 = LED 4 Watt (Remote)

NOTES:

① Consult Factory with requests regarding lamp sources, including LED, color temp., wattages or voltages not shown.

② Consult Factory for additional Emergency Battery options.

③ Max WHIP length with the REL provided by the factory is 8 feet.

⑤ Due to form and fit, final selection of the Battery Pack under discretion of Factory