

Rome/Sicily

EURO WALL PACK FAMILY


Surface Mount High Abuse Series LED

We reserve the right to revise the design or components of any product without notice.




| | | |
|------------------|--|------|
| CATALOG # | | TYPE |
| PROJECT/LOCATION | | |
| APPROVED BY | | |

SPECIFICATIONS

- BACKPLATE — 16 Gauge (.060) Aluminum Formed For Rigidity.
- DRIVER — Universal Voltage 120/277v Electronic Driver is standard for LED.
- EMERGENCY — LED — Remote or Integral Emergency Battery.
- FASTENERS — (4) Stainless Steel Tamperproof Screws Secure Lens to Back Plate.
- GASKETING — One Piece Die Cut 3/16" Thick Black EPDM and/or neoprene rubber.
- GROUND WIRE — Pre-Attached Insulated Green Wire.
- HARDWARE INCLUDED — (2) J-Box Screws (indoor only).
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED).
- LENS — Injection Molded 1/8" Thick (Nom.) Clear Prismatic POLYCARBONATE Drop Pyramidal — U.V. Stabilized. Drop Pyramid Standard.
- MOUNTING HOLES — (4) 5/16" Diameter Holes For 1/4" Diameter Bolts.
- REFLECTOR — 16G (.060) Aluminum Formed For Rigidity.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for Wet Locations.

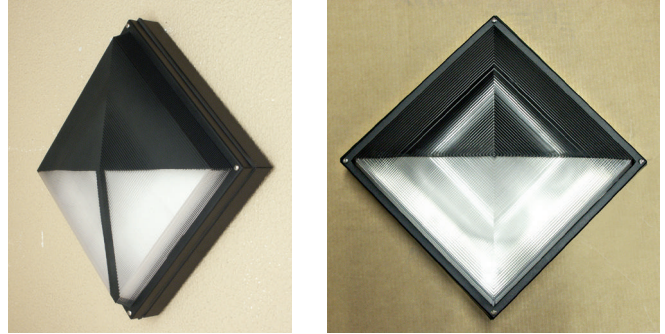

DIMENSIONS

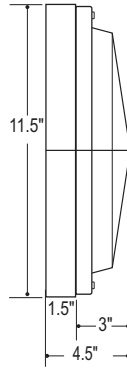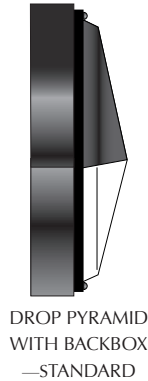

Shown with 5410 (Required for HID)

| ORDERING GUIDE: | Series | Lamp/Wattage | Color | Voltage | Finish | Options |
|-----------------|--------|--------------|-------|---------|--------|---------|
| | | | | | | |

SERIES

- RO = Rome Series (eyelid, vertical bar)
- SI = Sicily Series (eyelid)

LED WATTAGE¹

- LED20 = 20 Watt LED
- LED30 = 30 Watt LED
- LED40 = 40 Watt LED

LED COLOR TEMPERATURE

- 3K = ±3000K range
- 4K = ±4000K range
- 5K = ±5000K range

VOLTAGE

- 120 = 120 Volts
- 277 = 277 Volts
- 347 = 347 Volts
- EBU = Universal Volt (120-277v)
- 2EBU = 2 Electronic Drivers for Dual Circuit

FINISH

- BK = Black—Standard
- BZ = Bronze
- WH = White

OPTIONS

- 9328 = Dual Voltage Photocell 120/277V
- 5410 = 4-1/2" deep cast aluminum Backbox
- 9002 = Torx Tamperproof Screwdriver
- BB = Backbox (Non-ADA)
- DP = Drop Pyramidal STANDARD
- FUS = Single Fusing
- DFUS = Double Fusing
- SR = Semi Recessed

LED OPTIONS

- BL1 = Bi-Level Light (High/Low) — Single AC Input Feed, with Switch Sensor (Required)
- BL2 = Bi-Level Light (High/Low) — Wired for Dual AC Input Feeds
- D7 = 0-10V low-voltage dimming (100-30% Standard)
- MSE = Motion Sensor External for LED Specify Finish: White (WH) or Bronze (BZ)
- MSI1 = Motion Sensor Integral (Microwave) —Single Circuit: OFF / ALL-ON
- MSI2 = Motion Sensor Integral (Microwave) —Single Circuit: HALF-ON / ALL-ON
- SG = 10KA Surge Protection for LED fixtures Requires 5410 or BB (meets ANSI spec C62.41.2)

EMERGENCY BATTERY OPTIONS^{3,5}

No onsite Emergency Power (AC or DC) is provided
Specify Fixture Voltage: 120V or 277V Power Feed
A=120V or B=277V

LED Emergency Battery Factory Recommended

- EL82 = LED 4 Watt (Integral)²
- EL88 = LED 16 Watt (Integral)²
- REL82 = LED 4 Watt (Remote)

Premium (Bodine/Iota)

- REL61 = LED 12 Watt (Remote)
- REL63 = LED 23 Watt (Remote)
- REL67 = LED 23 Watt Cold Weather (Remote)

NOTES:

- Consult Factory with requests regarding lamp sources, including: LED, color temp., wattages or voltages not shown.
- Emergency Battery (EL) includes Backbox.
- Consult Factory for additional Emergency Battery options.
- Due to form and fit, final selection of the Battery Pack under discretion of Factory