

Warsaw



INDUSTRIAL HEAVY/VANDAL RESISTANT Wall Mount Outdoor LED

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver is standard LED.
- DOOR FRAME — Die Cast Aluminum.
- EMERGENCY — LED — Integral.
- GASKETING — Silicone Rubber.
- HOUSING — Die Cast Aluminum.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode.
- LENS — Borosilicate Glass.
- REFLECTOR — Aluminum.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.

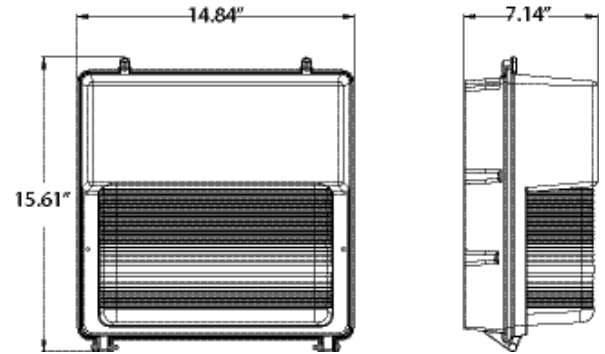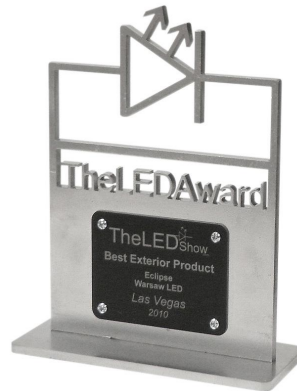

Winner of
The LED Show Award
"Best Exterior Product"



Series	Lamp/Wattage	Color	Voltage	Finish	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

SERIES

WA = Warsaw Series

LED WATTAGE¹

LED40 = 40 Watt LED

LED60 = 60 Watt LED

LED COLOR TEMPERATURE

3K = ±3000K range

4K = ±4000K range

5K = ±5000K range

65K = ±6500K range

VOLTAGE

120 = 120 Volts

277 = 277 Volts

347 = 347 Volts

EBU = Universal Volt (120-277v) Electronic Driver

FINISH

BZ = Bronze — STANDARD

OPTIONS

9328 = Universal Integral Photocell 120/277V

FUS = Single Fusing

DFUS = Double Fusing

GTD = Generator Transfer Device (Bodine)

LED OPTIONS

BL1 = Bi-Level Light (High/Low)

— Single AC Input Feed

— Switch Sensor (Required)

BL2 = Bi-Level Light (High/Low)

— Wired for Dual AC Input Feeds

D7 = 0-10V low-voltage dimming

(100-30% Standard, Consult Factory for Other)

MSE = Motion Sensor External

— Single circuit-all on, all off

Specify Finish: White (WH)/Bronze (BZ)

MSE2 = Motion Sensor External

— Dual circuit, half on half off

Specify Finish: White (WH)/Bronze (BZ)

SG = 10KA Surge Protection for LED fixtures

(meets ANSI spec C62.41.2)

EMERGENCY BATTERY OPTIONS^{3,5}

No onsite Emergency Power (AC or DC) is provided

Specify Fixture Voltage: 120V or 277V Power Feed

A=120V or B=277V

LED Emergency Battery

EL67 = LED 23 Watt Cold Weather (Integral)

EL82 = LED 4 Watt (Integral)

EL85 = LED 20 Watt (Integral)

EL88 = LED 16 Watt (Integral)

NOTES:

¹ Consult Factory with requests regarding lamp sources, including LED, color temp., wattages or voltages not shown.

³ Consult Factory for additional Emergency Battery options.

⁵ Due to form and fit, final selection of the Battery Pack under discretion of Factory

