

Aries Slim Series

Narrow Rectangular Diffuser Solid or Slotted Shield




We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal Volt (120-277v) Electronic Driver.
- BACKPLATE — 16 Ga. aluminum (AL).
- BACKBOX — 16 Ga. aluminum (AL) with wire access on four sides and back through 7/8" dia. KO flattened water tight (Optional for surface conduit entry or standard with emergency battery).
- DIFFUSER — White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8").
- SHIELD — Solid Aluminum Opaque Shield with Optional Center-Cut Aperture along length of fixture - specify shield finish. Optional Color Window.
- FINISH — Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.

- GASKETING — High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.
- FASTENERS — Stainless steel tamperproof screws —(2) To secure lens in place.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode.
- MOUNTING — Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor (no center access hole for J-Box mount). Must derate lamping for horizontal.
- WALL WASH — CTB is Standard with Uplight or/and Downlight. For wall wash patterns specify: UP (Uplight) or DN (Downlight) or UP/DN (Up and Downlight).
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.

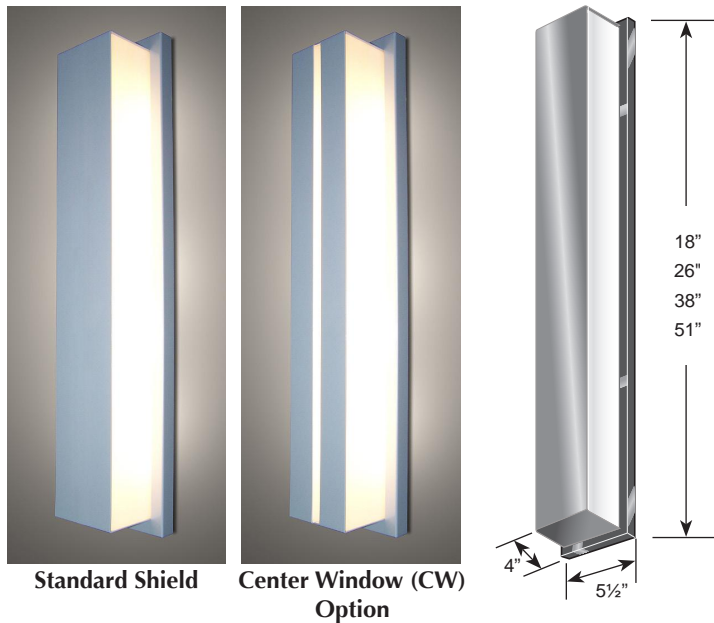

GRAVURA FINISHES



White Vein (WVN)



Black Vein (BVN)



Gold Marble (GMB)



Travertine (TVT)

ORDERING GUIDE:	Series	Size	LED Wattage	Color	CRI	Voltage	Finish	Options

SERIES

AI-5M = Aries Slim Series

SIZE

- XL1 = 5 1/2"W x 18"L x 4"D
- XL2 = 5 1/2"W x 26"L x 4"D
- XL3 = 5 1/2"W x 38"L x 4"D
- XL4 = 5 1/2"W x 51"L x 4"D

LED WATTAGE

- LED15 = 15 Watt LED
- LED30 = 30 Watt LED

LED COLOR TEMPERATURE

- 27K = ±2700K Range
- 3K = ±3000K Range
- 35K = ±3500K Range
- 4K = ±4000K Range
- 5K = ±5000K Range

COLOR RENDERING INDEX OPTIONS

- 80CRI = 80 Color Rendering Index - STANDARD
- 90CRI = 90 Color Rendering Index
- 96CRI = 96 Color Rendering Index

VOLTAGE

EBU = Universal Volt (120-277v) Electronic Driver

OPTIONS

- 9002 = Tamperproof Screwdriver
- BB = Backbox for EL or Surface Conduit: 2" Depth
—Required where (*) Shown
- D7 = 0-10V low-voltage dimming
- CW = Center Window

Color Window Options:

- AM = Amber
- BL = Blue
- GN = Green
- RD = Red
- WH = WH
- CC = Custom Color (Consult Factory)
- TUC = Tunable Color — RGBWW (*BB Option Required)
- TUW = Tunable White — 2700K-5000K (*BB Option Required)

STANDARD PAINTED FINISH

- BK = Black Finish
- BZ = Bronze Finish
- PNA = Painted Natural Aluminum
- SGR = Silver Gray
- WH = White Finish

CUSTOM ORDER PAINTED FINISH

- CC = Custom Color (Provide Specs)
- GV = Gravura Finish (See Chart)
—Additional Gravura Finishes Available (Consult Factory)

EMERGENCY BATTERY OPTIONS

No onsite Emergency Power (AC or DC) is provided

Specify Fixture Voltage: 120V or 277V Power Feed

A=120V or B=277V

*NOT Compatible with TUC/TUW Options

Meets California Energy Commission Title 20:
(CEC-400-2014-009-CMF) Efficiency Standards

EL4W = Integral LED 4 Watt

REL8W = Remote LED 10 Watt (*BB Option Required)

REL16W = Remote LED 16 Watt (*BB Option Required)

