

# Moon

**Extended Length Indoor/Outdoor Sconce**  
**Multi-Functional — Wall / Ceiling / Pendant**  
**LED**




We reserve the right to revise the design or components of any product without notice.


CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## SPECIFICATIONS

- BACKPLATE — 16 Ga. aluminum (AL).
- BACKBOX — 16 Ga. aluminum (AL) with wire access on four sides and back through 7/8" dia. KO flattened water tight (Optional for surface conduit entry or standard with emergency battery).
- DIFFUSER — White translucent, fully enclosed non-yellowing polycarbonate lens is standard. 10% Backlight Glow is Standard.
- DRIVER — Universal Voltage 120~277V Electronic Driver is Standard.
- FASTENERS — Stainless steel tamperproof screws —(2) To secure lens in place.
- FINISH — Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
- FRAME — 16 Ga. aluminum (AL).
- GASKETING — High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.
- MOUNTING — Use (6) 5/16" diameter holes for 1/4" diameter bolts for indoor/outdoor 1-1/4" Knock Out in Center for Wire Access.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.

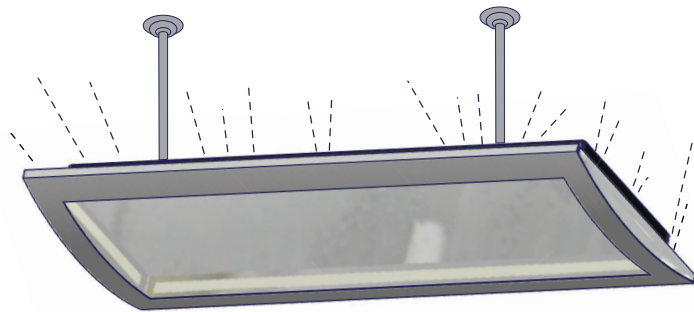

Moon Series Pendant Mount

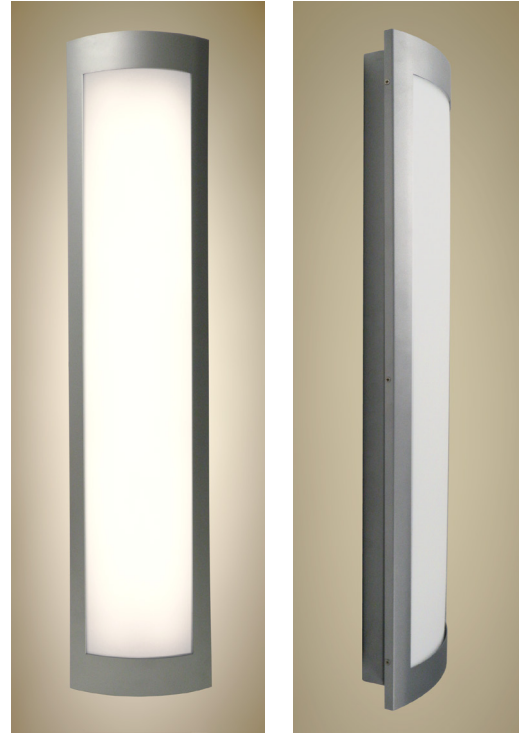

LAMP TYPE/QTY/WATTAGE <sup>1</sup>			
Visit <a href="http://www.eclipselightinginc.com">www.eclipselightinginc.com</a> for available IES files			
Fixture Size		MO-38	MO-50
Dimensions - W x H x D		11" x 38" x 4"	11" x 49" x 4"
Light Emitting Diode	LED	30w / 50w	30w / 50w
*Consult Factory for CFL, Linear Fluorescent, HID, and Induction Lamping			

Series	Size	Mounting	Lamp/Wattage	Color	Voltage	Finish	Options

**NOTES:**

<sup>1</sup> Consult Factory with requests regarding lamp sources, including LED, color temp., wattages or voltages not shown.

<sup>2</sup> Backbox (BB) Required (where text bold and <sup>2</sup> shown)

<sup>3</sup> Max mounting height of fixture is 10' (10 feet)

<sup>4</sup> Consult Factory for other Voltage.

**SERIES**  
MO = Moon Series

**SIZE**  
38 = 38" Tall  
50 = 50" Tall

**MOUNTING**  
CM = Ceiling Mount  
PEND = Pendant Mount  
WM = Wall Mount

**LED WATTAGE**  
Refer to Chart Above

**LED COLOR TEMPERATURE**  
3K = ±3000K Range  
4K = ±4000K Range  
5K = ±5000K Range

**VOLTAGE<sup>4</sup>**  
EBU = Universal Volt (120-277v) Electronic Driver  
PRS = Programmable Start Universal Driver

**FINISH (list PX finish second)**  
**STANDARD PAINTED FINISH**

BK = Black  
BZ = Bronze  
PNA = Painted Natural Aluminum - Standard  
SGR = Silver Gray  
WH = White

**CUSTOM ORDER PAINTED FINISH**  
CC = Custom Color (Provide Specs)

CH = Corvel Chrome  
HBA = Hand Brushed Aluminum with Clear Coat

**OPTIONS**  
9002 = Tamperproof Screwdriver  
CR = Custom Requirements  
FUS = Single Fusing  
GTD = Generator Transfer Device (Bodine)<sup>2</sup>  
MSI = Motion Sensor Integral<sup>2</sup> for LED  
WET = Wet Location

**DIFFUSER OPTIONS—DECORATIVE ACCENT**  
ACR = Opal White Acrylic Diffuser (Consult Factory)  
DP = Decorative Pattern  
GV = Gravura Custom Engraving—design own fascia  
PX = Alum. Perforated Insert with 1/16" dia. holes. (Must Specify Finish)

**LED OPTIONS**  
BL1 = Bi-Level Light (High/Low)  
— Single AC Input Feed  
— Switch Sensor (Required)  
BL2 = Bi-Level Light (High/Low)  
— Wired for Dual AC Input Feeds  
D7 = 0-10V low-voltage dimming (100-30% Standard, Consult Factory for Other)

**EMERGENCY BATTERY OPTIONS**  
*No onsite Emergency Power (AC or DC) is provided*  
Specify Fixture Voltage: 120V or 277V Power Feed  
A=120V or B=277V  
*\*Consult Factory for Emergency Battery Options*