

We reserve the right to revise the design or components of any product without notice.

VTP

Vapor Tite Profile Linear Luminaire Damp/Dusty/Wet Locations RoHS / NSF / IP65 / IP66 / IK10

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- APPLICATIONS — Low Bay Areas, General Lighting, Garden Centers, Food Processing, Parks & Recreation, Supermarkets, Warehouses, Subways, Parking Garages, Schools
- DRIVER — Universal Voltage 120/277V Electronic driver with 0-10V (100-30%) dimming.
- HOUSING/LENS — One piece co-extruded polycarbonate housing and lens.
- ENDS — Gasketed end cap with knock-outs for power feed. Simple installation using one acme screw per end cap.
- FINISH — Housing and end caps available in a black or frosted finish.
- MOUNTING — Standard 316 stainless steel mounting bracket for easy snap-on installation. Additional mounting options available for hang chain mount. Optional safety bail snaps around fixture for added security/support.
- LIGHT ENGINE — Energy efficient Light Emitting Diode.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. UL evaluated for 25°C / 40°C ambient temperature. IP65 Rated. IP66 Rated (Vent Required). RoHS Compliant. NSF Rated (Safety Bail Required). Meets IK10 impact standard.



ORDERING INFO

Series	Length	Wattage	CCT	Voltage	Finish	Options
ORDERING GUIDE:						

SERIES

VTP = Vapor Tite Linear Profile Luminaire

LENGTH

- 2 = 24"L x 3.86"W x 3.75"D
- 4 = 47"L x 3.86"W x 3.75"D
- 8 = 96"L x 3.86"W x 3.75"D (MOQ=25pcs)

WATTAGE

Note: Refer to Below Chart for Size / Wattage Compatibility
LED(xx) = LED (xx = Wattage, ex: LED36)

COLOR TEMPERATURE (CCT)

- 3K = ±3000K range
- 35K = ±3500K range
- 4K = ±4000K range
- 5K = ±5000K range

VOLTAGE

UNV = Universal Volt (120-277V) Driver

STANDARD FINISH

- BK = Black
- WH = White

MOUNTING/COMPLIANCE OPTIONS

- Note: HGB/SFB Options Are 316 Stainless Steel
- HGB = Hanging Bail (Sold by Pair)
 - Bail Attaches to Bracket for Hanging Chain Mount
 - SFB = Safety Bail (Sold by Each / Required for NSF Rating)
 - Bail Snaps around fixture into Mount Bracket
 - Provides Additional Security/Support
 - SSB = 316 Stainless Steel Mounting Brackets (STANDARD)
 - Easy Snap-On Installation
 - IP66 = Optional Vent Required for IP66 Rating

TANDEM OPTION

TDM = Tandem Mounting Kit (Consult Factory)

CONTROL OPTIONS (Choose from Manual or Sensor)

- MANUAL CONTROL (Wall Switch or Control System)
Note: Cannot be used with Sensor Controls below
Note: 0-10V (100-30%) Dimming is Standard
D7A = 0-10VDC LED Dimming Driver (100-10%)
D7B = 0-10VDC LED Dimming Driver (100-1%)
D8 = LED Dimming: Forward Phase (Triac)

OR

- Sensor Control (Sensor Integral to Fixture)
Note: Cannot be used with Manual Controls above
BLD = Bi-Level Dimming | Motion Sensor Integral
 - Microwave / Single Feed / 120/277V Only
 - Standby Dim Level Presets: 10% / 20% / 30% (Standard) / 50%

EMERGENCY BATTERY OPTIONS

Meets California Energy Commission Title 20:
(CEC-400-2014-009-CMF) Efficiency Standards
EL16W = Integral LED 16 Watt (Not Compatible with 2-Foot)

VTP SIZE / WATTAGES				
Fixture		VTP 2-Foot	VTP 4-Foot	VTP 8-Foot
Dimensions		24" Length x 3.86" Width x 3.75" Depth	47" Length x 3.86" Width x 3.75" Depth	96" Length x 3.86" Width x 3.75" Depth
Light Emitting Diode	LED	36W	36W	65W

VTP

Vapor Tite Profile Linear Luminaire
Damp/Dusty/Wet Locations
RoHS / NSF / IP65 / IP66 / IK10

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

DIMENSIONS



VTP 2-Foot Dimensions
 24" Length x 3.86" Width x 3.75" Depth



VTP 4-Foot Dimensions
 47" Length x 3.86" Width x 3.75" Depth



VTP 8-Foot Dimensions
 96" Length x 3.86" Width x 3.75" Depth

FINISHES



Black (BK)



White (WH)

MOUNTING OPTIONS



Standard Stainless Steel Mounting Bracket (SSB)
 Easy Snap-On Installation



Hanging Bail (HGB)
 Bail attaches to Bracket for Hanging Chain Mount
 (316 Stainless Steel)
 *Sold by Pair



Safety Bail (SFB)
 Bail Snaps around the fixture into the Mounting Bracket for Additional Security/Support
 (316 Stainless Steel)
 *Sold by Each / *Required for NSF Rating

VTP

Vapor Tite Profile Linear Luminaire
Damp/Dusty/Wet Locations
RoHS / NSF / IP65 / IP66 / IK10


We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

PHOTOMETRIC DATA

Summary of Results VTP-4-LED36-4K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
3698.8 Lumens	107.8 Lm/W	34.3W	3958K	Type VS	B1-U3-G1

LCS Summary	
Zone	Lumens
Forward Low (0-30)	442.6
Forward Medium (30-60)	843.8
Forward High (60-80)	369.8
Forward Very High (80-90)	95.6
Back Low (0-30)	442.6
Back Medium (30-60)	843.8
Back High (60-80)	369.8
Back Very High (80-90)	95.6
Up Low (90-100)	112.0
Up High (100-180)	83.2

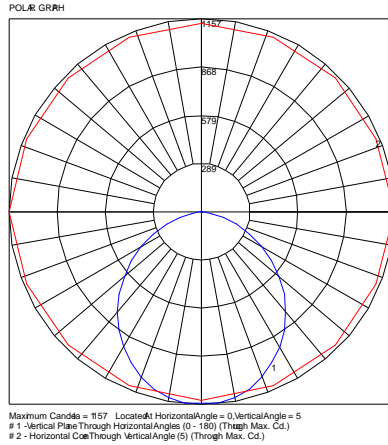

Summary of Results VTP-4-LED36-5K-UNV					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
3644.2 Lumens	105.9 Lm/W	34.4W	5020K	Type VS	B1-U3-G1

LCS Summary	
Zone	Lumens
Forward Low (0-30)	433.8
Forward Medium (30-60)	827.2
Forward High (60-80)	368.4
Forward Very High (80-90)	95.1
Back Low (0-30)	433.8
Back Medium (30-60)	827.2
Back High (60-80)	368.4
Back Very High (80-90)	95.1
Up Low (90-100)	111.6
Up High (100-180)	83.6

