

SRF Series

Vandal Resistant Canopy Fixture

Selectable Wattage/CCT

Semi-Recessed - Flat Polycarbonate Lens

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- APPLICATIONS— Eaves, Breezeways, Canopy, Soffit, Stairwell.
- DRIVER— Universal voltage (120-277v) electronic driver with 0-10V dimming.
- FINISH — Backplate and Frame are Phosphate pre-treated and finished in Oven Baked White Polyester Powder Coat.
- LIGHT ENGINE — Energy efficient LED - Selectable Wattage/CCT.
- LENS — #80 Flat 1/8" Thick (.125) Prismatic Polycarbonate is standard.
- LENS FASTENERS — Four (4) Stainless Steel Torx Tamperproof Screws to Secure Frame to Backplate.
- MOUNTING — Standard Semi-Recessed Mounting.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for Damp Locations — Retrofit Electric Lighting Fixture. **Made in USA / Buy America Compliant / Buy American Act.**



ORDERING INFO

Series	Size	Wattage	CCT	Voltage	Finish	Options

ORDERING GUIDE:

SERIES

SRF = SRF Series

SIZE

M = 13-1/2" Square (9-3/5" Sq. Opening)
L = 15-1/2" Square (10-3/4" Sq. Opening)

WATTAGE

SLED = *Selectable Wattage: 13.5W | 17W | 20.5W
— See Chart Below for Lumen Output

COLOR TEMPERATURE (CCT)

SCCT = *Selectable CCT: 3000K | 3500K | 4000K | 5000K

*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

VOLTAGE

UNV = Universal Volt (120-277v) Driver

STANDARD FINISH

BK = Black Finish
BZ = Bronze Finish
PNA = Painted Natural Aluminum
WH = White Finish - STANDARD

PREMIUM UPCHARGE FINISH

CC = Custom Color (Visit www.ralcolor.com)
— Provide RAL# or Make-to-Match Color Chip

LENS OPTIONS

81 = .156" K12 Prismatic Polycarbonate (flat lens)
DP = Drop Pyramidal Lens
DS = Drop Square Lens

DIMMING OPTIONS

Note: 0-10V 100%-30% is Standard
D7A = 0-10VDC LED Dimming Driver (100-10%)

EMERGENCY BATTERY OPTIONS⁵⁰

Meets California Energy Commission Title 20:
(CEC-400-2014-009-CMF) Efficiency Standards

REL4W = Remote LED 4 Watt
REL10W = Remote LED 10 Watt

Cold Weather Emergency Batteries:

Operating Temp: -20°C thru 50°C / NON-CEC Compliant

REL10W-CW = Remote LED 10 Watt (Cold Weather)


ACCESSORY OPTIONS (order as a separate line)

9002 = Tamperproof Screwdriver


⁵⁰ Max WHIP length of the REL is 8 feet.

Selectable Wattage	3000K	3500K	4000K	5000K
13.5W	2,100 Lumens	2,125 Lumens	2,150 Lumens	2,200 Lumens
17W	2,650 Lumens	2,675 Lumens	2,700 Lumens	2,750 Lumens
20.5W	3,100 Lumens	3,125 Lumens	3,150 Lumens	3,200 Lumens


DIMENSIONS

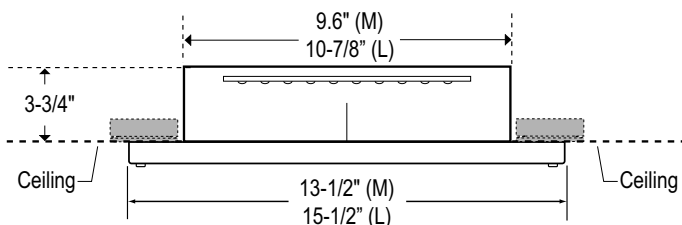

OPTIONS



Drop Square Lens (DS)



Drop Pyramidal Lens (DP)