

# Capri

## EURO WALL PACK FAMILY

### Surface Mount / ADA Compliant

### Vandal Resistant LED



We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

#### SPECIFICATIONS

- DIMENSIONS — Small: 7.75”L X 4.4”W X 2.9”D (ADA Compliant Depth)  
Large: 10.6”L X 5.8”W X 3.3”D (ADA Compliant Depth)
- DRIVER — 120VAC Electronic Driver.
- HOUSING — One-piece aluminum housing.
- FINISH — Oven baked polyester powder coating.

- LENS — Polycarbonate Diffuser.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode.
- BEAM ANGLE — 120°.
- MOTION SENSOR — Microwave Motion Sensor is optional.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for Wet Location.



ORDERING GUIDE:

Series	Size	Lamp/Wattage	Color	Voltage	Finish	Options

**SERIES**  
CPR = Capri Series

**SIZE**  
S = Small 7.75”L X 4.4”W X 2.9”D (ADA Compliant Depth)  
L = Large 10.6”L X 5.8”W X 3.3”D (ADA Compliant Depth)

**LIGHT ENGINE WATTAGE**  
LED10 = 10 Watt LED (720 Nominal Lumens) — Size Small Only  
LED20 = 20 Watt LED (1300 Nominal Lumens) — Size Large Only  
*\*Photometric Data Available on 2nd Page*

**LED COLOR TEMPERATURE**  
3K = ±3000K range  
4K = ±4000K range

**VOLTAGE**  
120 = 120 Volt AC

**FINISH**  
ATC = Anthracite Coal — STANDARD  
BK = Black  
BZ = Bronze  
PNA = Painted Natural Aluminum  
WH = White



**OPTIONS**  
MS11 = Motion Sensor Integral (Microwave)  
—Single Circuit:-OFF / ALL-ON  
—Size Large Only

**LED EMERGENCY BATTERY — Consult Factory**

# Product Test Catalogue #: CPR-LED20-3K-120

Test Date: 08/23/2017 — Tested in accordance with LM-79-80. The results contained in this summary report pertain only to the tested sample.

Summary of Results		Test Conditions				
Lumen Output	Efficacy	Temp	Voltage	Power	Power Factor	Current
1785.05 Lumens	94.10 Lm/W	25°C (±1°C)	120.0	18.97W	0.75	0.1130A

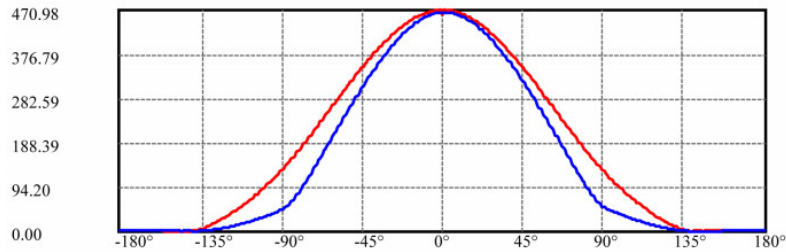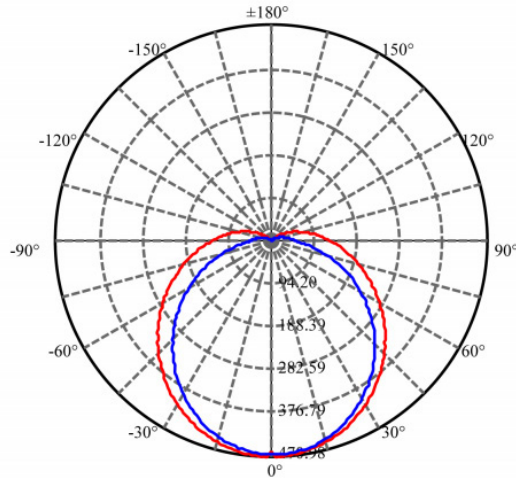

C0(Max): —  
 C0/C180: —  
 C90/C270: —  
 Field angle(10%I<sub>max</sub>):C0/180Left:115.2 Right:112.5  
                                   :C90/270Left:91.1 Right:90.5  
 Beam Angle(50%I<sub>max</sub>):C0/180Left:68.3 Right:66.3  
                                   :C90/270Left:58.1 Right:56.9