We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

Euro Bulkheads

Berlin 2 • Dublin 2 • London 2

EURO VANDAL WALL PACK FAMILY

Wall or Ceiling Mount / IP66 Rated

SPECIFICATIONS

- DRIVER — Univeral Voltage 120/277V Electronic Driver with 0-10V dimming is standard.
- EMERGENCY — Optional Integral Emergency Battery.
- GASKETING — High temp., non-aging black EPDM and/or neoprene rubber concealed in housing pocket & enclosed by cast-in drip shield & rear wire entrance hole to protect against outside contaminants.
- HOUSING — Heavy wall cast aluminum with wire access on back through threaded 1/2″ conduit size entrance hole. Wire access is also available for surface conduit installations by drilling out any of the side knockouts . Bronze oven baked Polyester Powder Coat standard. Available in three styles:
  - Berlin 2 (BE2) = Eyelid
  - Dublin 2 (DU2) = Grid Front Frame*
  - London 2 (LO2) = Open Front Frame*
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED).
- LENS — Polycarbonate Opal Lens.
- MOUNTING — Surface Wall or Ceiling Mount.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for Wet Location. IP66 Rated. Complies with Buy American Act.
- WARRANTY — Standard 5 Years, defects and workmanship.

BERLIN 2 (BE2) **DUBLIN 2 (DU2)*** **LONDON 2 (LO2)***

***Suitable for Ceiling Mount Applications**

ORDERING INFO

ORDERING GUIDE:

Series	Frame	Wattage	CCT	Voltage	Finish	Options

SERIES
BE2 = Berlin 2 Series
DU2 = Dublin 2 Series
LO2 = London 2 Series

FRAME
RD = 12″ Round
SQ = 12″ Square

WATTAGE
LED17 = 17 Watt LED
LED25 = 25 Watt LED
LED30 = 30 Watt LED
SLED = *Selectable LED Wattage: 13.5W | 17W | 20.5W

COLOR TEMPERATURE (CCT)
3K = ±3000K range
4K = ±4000K range
5K = ±5000K range
SCCT = *Selectable CCT: 3000K | 3500K | 4000K | 5000K
— SCCT Compatible with SLED Only

**Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.*

VOLTAGE
347 = 347 Volt
480 = 480 Volt (25W Only)
UNV = Universal Volt (120-277V) Driver

STANDARD FINISH
BZ = Bronze
WH = White

PREMIUM UPCHARGE FINISH
MOQ = 5 Pieces and Subject to Setup Fee
BK = Black
PNA = Painted Natural Aluminum
SGR = Silver Gray
CC = Custom Color (Visit **www.ralcolor.com**)

INHIBITOR FINISH
+NAT = Epoxy Coating for Chlorine Environments
+OFC = Epoxy Coating for Ocean Front Environments

PHOTOCELL OPTION
9328 = Photocell Button (120/277V)④

CONTROL OPTIONS (Choose from Manual or Sensor)
MANUAL CONTROL (Wall Switch or Control System)
Note: Cannot be used with Sensor Controls
Note: 0-10V (100-30%) Dimming is Standard
D7B = 0-10VDC LED Dimming Driver (100-1%)④⑤
BLS = Bi-Level Switching — Using 2 Drivers (2UNV)④⑤
— BLS is NOT Compatible with Berlin 2 Series

OR (See Sensor Controls)

Sensor Control (Sensor Integral to Fixture)
Note: Cannot be used with Manual Controls
OCC = Occupancy Sensing | Motion Sensor Integral④⑳
— Microwave / Single Feed / 120/277V Only
— Standby Dim Level Presets: ON/OFF (0%/100%)
BLD = Bi-Level Dimming | Motion Sensor Integral④⑤⑳
— Microwave / Single Feed / 120/277V Only
— Standby Dim Level Presets:
10% / 20% / 30% (Standard) / 50%

MISC OPTIONS
FUS = Single Fusing④
DFUS = Double Fusing④
TP = Tamperproof Screws

EMERGENCY BATTERY OPTIONS
Meets California Energy Commission Title 20:
(CEC-400-2014-009-CMF) Efficiency Standards
EL10W = Integral LED 10 Watt④

Cold Weather Emergency Batteries:
Operating Temp: -20°C thru 50°C *(NON-CEC Compliant)*
EL10W-CW = Remote LED 10 Watt (Cold Weather)④

NOTES:
④ Compatible with 120/277V Driver (UNV) Only
⑤ NOT Compatible with SLED
⑳ Max mounting height of fixture is 18′ (18 feet)

Selectable LED Wattage / Lumen Output		
Low Power	**Medium Power**	**High Power**
13.5 Watt (2150 Lumens)	17 Watt (2400 Lumens)	20.5 Watt (3150 Lumens)

Note: Lumen output based on 4000K CCT.

© 2026 Eclipse Lighting Inc.

We reserve the right to revise the design or components of any product without notice.

Euro Bulkheads

Berlin 2 • Dublin 2 • London 2

EURO VANDAL WALL PACK FAMILY

Wall or Ceiling Mount / IP66 Rated

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

DIMENSIONS

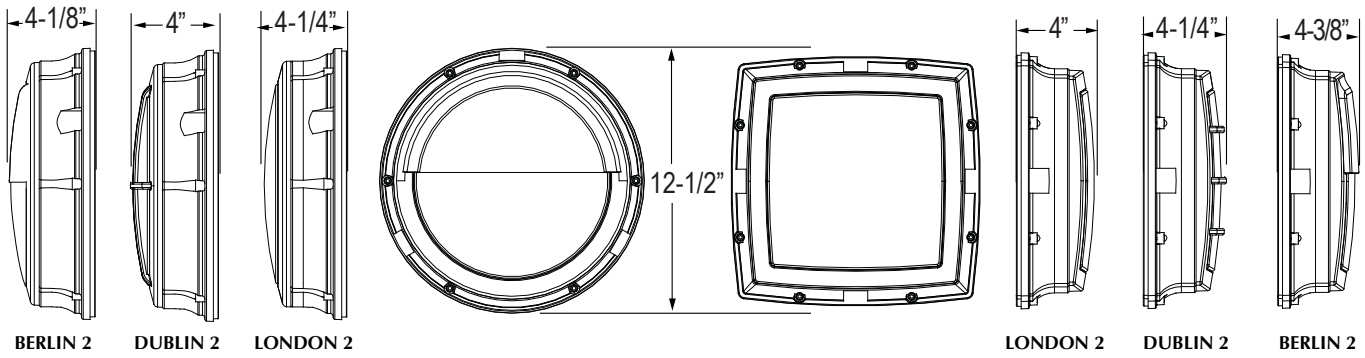

PHOTOMETRIC PERFORMANCE DATA

MODEL NUMBER	LUMENS	LPW	WATTAGE (Actual Draw)	BUG RATING
BE2-RD-LED25-3K	2775 Lumens	102 LPW	27.1W	B1-U1-G1
BE2-RD-LED25-4K	3010 Lumens	111 LPW	27.1W	B1-U1-G1
BE2-RD-LED25-5K	3135 Lumens	116 LPW	27.1W	B1-U1-G1
BE2-SQ-LED25-3K	N/A	N/A	27.1W	N/A
BE2-SQ-LED25-4K	3223 Lumens	119 LPW	27.1W	B1-U1-G1
BE2-SQ-LED25-5K	3358 Lumens	124 LPW	27.1W	B1-U1-G1
DU2-RD-LED25-3K	2832 Lumens	105 LPW	27.1W	B1-U1-G0
DU2-RD-LED25-4K	3073 Lumens	113 LPW	27.1W	B1-U1-G0
DU2-RD-LED25-5K	3201 Lumens	118 LPW	27.1W	B1-U1-G0
DU2-SQ-LED25-3K	2757 Lumens	102 LPW	27.1W	B1-U1-G0
DU2-SQ-LED25-4K	2990 Lumens	110 LPW	27.1W	B1-U1-G0
DU2-SQ-LED25-5K	3115 Lumens	115 LPW	27.1W	B1-U1-G0
LO2-RD-LED25-3K	3330 Lumens	123 LPW	27.1W	B1-U1-G0
LO2-RD-LED25-4K	3613 Lumens	133 LPW	27.1W	B1-U1-G0
LO2-RD-LED25-5K	3763 Lumens	139 LPW	27.1W	B1-U1-G0
LO2-SQ-LED25-3K	3245 Lumens	120 LPW	27.1W	B1-U1-G0
LO2-SQ-LED25-4K	3520 Lumens	130 LPW	27.1W	B1-U1-G0
LO2-SQ-LED25-5K	3667 Lumens	135 LPW	27.1W	B1-U1-G0

© 2026 Eclipse Lighting Inc.