

Granada

FULL CUT-OFF WALL PACK FAMILY

Low Height Wall Mount




Vandal Resistant LED

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver is standard for LED.
- EMERGENCY — LED — Remote Only.
- HOUSING — Precision die-cast rear housing supplied with two ½" trade size threaded conduit holes (one top and one bottom). Finished textured architectural bronze powder coat over chromate conversion coating.
- FINISH — Extremely durable oven baked Polyester Powder coat – Finishes include Black, Bronze or White.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED).
- LENS — One-piece, high temperature injection molded clear polycarbonate lens finished to match rear housing.
- MOUNTING — Cast-in template for mounting directly to recessed 3" and 4" trade size junction boxes.
- REFLECTOR — Aluminum reflector.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.

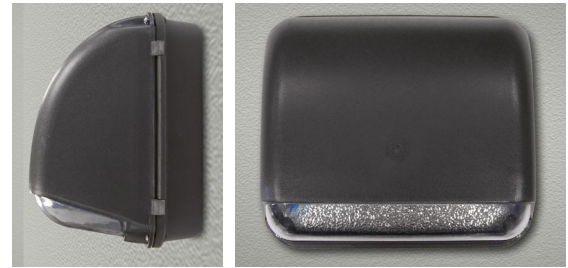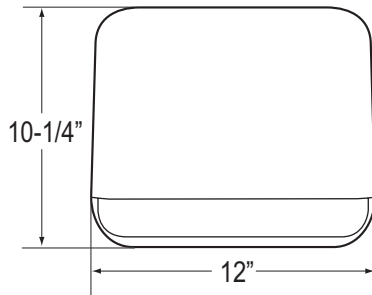

ORDERING GUIDE:

Series	Reflector	Lamp/Wattage	Color	Voltage	Finish	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

SERIES

GN = Granada Series (11¾"W x 10½"H x 9"D)

REFLECTOR

FT = Forward Throw Distribution
 WS = Wide Spread Distribution

LAMP TYPE/QUANTITY/WATTAGE^①

LED20 = 20 Watt LED
 LED30 = 30 Watt LED

LED COLOR TEMPERATURE

3K = ±3000K range
 4K = ±4000K range
 5K = ±5000K range
 65K = ±6500K range

VOLTAGE

120 = 120 Volts
 277 = 277 Volts
 EBU = Universal Volt (120-277v) Electronic Driver

FINISH

BK = Black
 BZ = Bronze (Standard)
 WH = White Finish

OPTIONS

9002 = Torx Tamperproof Screwdriver
 9328 = Universal Photocell – 120/277V
 FUS = Single Fusing
 GTD = Generator Transfer Device (Bodine)

LED OPTIONS

D7 = 0-10V low-voltage dimming (100-30% Standard, Consult Factory for Other)
 MSE = Motion Sensor External—Single circuit-all on, all off
 Specify Finish: White (WH)/Bronze (BZ)
 MSE2 = Motion Sensor External—Dual circuit, half on half off
 Specify Finish: White (WH)/Bronze (BZ)
 MSI = Motion Sensor Integral^② (Microwave)
 —Single Circuit: OFF / ALL-ON
 MSI2 = Motion Sensor Integral^② (Microwave)
 —Single Circuit: HALF-ON / ALL-ON
 SG = 10KA Surge Protection for LED fixtures (meets ANSI spec C62.41.2)

EMERGENCY BATTERY OPTIONS^{③④}

No onsite Emergency Power (AC or DC) is provided
 Specify Fixture Voltage: 120V or 277V Power Feed
 A=120V or B=277V

LED Emergency Battery^⑤

REL67 = LED 23 Watt Cold Weather (Remote)
 REL69 = LED 23 Watt (Remote)
 REL82 = LED 4 Watt (Remote)
 REL85 = LED 20 Watt (Remote)
 REL88 = LED 16 Watt (Remote)

NOTES:

- Consult Factory with requests regarding lamp sources, including LED, color temp., wattages or voltages not shown.
- Consult Factory for additional Emergency Battery options not shown.
- Max mounting height of fixture is 10 feet
- Max WHIP length with the REL provided by the factory is 8 feet.
- Due to form and fit, final selection of the Battery Pack under discretion of Factory

