

Irvine 2

ARCHITECTURAL WALL PACK Indoor/Outdoor Wall Sconce Up & Downlight LED

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		


SPECIFICATIONS

- DRIVER — Universal Volt 120/277v Electronic Driver is Standard for LED.
- DECORATIVE SHIELD — Die-formed and welded twin trapezoidal shape aluminum. Mounts over fixture housing. Up/Downlight standard. Optional downlight-only model (DK option) with Solid Top; Complies with Dark Sky ordinance.
- EMERGENCY — LED — Remote Only.
- FINISH — Polyester powder coat for durability and weather resistance. Dark Bronze, Black, White, Painted Natural Aluminum and Custom Colors.
- GASKETING — High temperature black EPDM and/or neoprene to seal out moisture and outside contaminants.
- HOUSING — Heavy duty 16 Gauge rectangular aluminum housing and backplate.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED).
- LENS — 1/8" thick Clear Prismatic Polycarbonate Standard. Optional Opaque Top and/or Bottom.
- LENS FASTENERS — Stainless steel tamperproof screws – (4) To secure lens in place.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.




ARRA
Compliant


HOUSING STYLE & OPTIONS

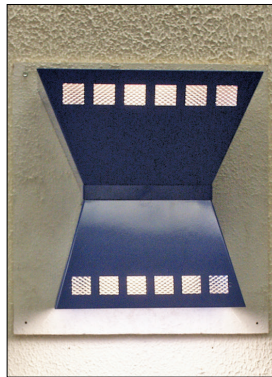

Shown with Optional
Decorative Window (DW)




Shown with Up and Downlight
(UP/DN)



Shown with Downlight Only
(DN)

DIMENSIONS



Irvine 2

ARCHITECTURAL WALL PACK

Indoor/Outdoor Wall Sconce

Up & Downlight LED

ORDERING GUIDE:

Series	Lamp/Wattage	Color	Voltage	Finish	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

SERIES

IR2 = Irvine 2 Series (15¼"W x 16"H x 9"D)

LED WATTAGE¹

LED20 = 20 Watt LED (Top and/or Bottom)

LED COLOR TEMPERATURE

3K = ±3000K range
4K = ±4000K range
5K = ±5000K range
6K = ±6500K range

VOLTAGE

120 = 120 Volts
277 = 277 Volts
347 = 347 Volts
EBU = Universal Volt (120-277v) Electronic Driver
2EBU = Two Universal Volt Electronic Drivers

FINISH

BK = Black
BZ = Bronze Standard
CC = Custom Color (Consult Factory)
PNA = Painted Natural Aluminum
WH = White

OPTIONS

9002 = Tamperproof Screwdriver
DK = Dark Sky: Solid Shield Top—Clear Prismatic Bottom
FUS = Single Fusing
GTD = Generator Transfer Device (Bodine)
UP = Uplight ONLY – Solid Shield Bottom
DW = Decorative Window
OB = Opaque Bottom
OT = Opaque Top

LED OPTIONS

BL1 = Bi-Level Light (High/Low)
— Single AC Input Feed, with Switch Sensor (Required)
BL2 = Bi-Level Light (High/Low)
— Wired for Dual AC Input Feeds
D7 = 0-10V low-voltage dimming
(100-30% Standard, Consult Factory for Other)
SG = 10KA Surge Protection for LED fixtures
(meets ANSI spec: C62.41.2)

EMERGENCY BATTERY OPTIONS^{3 5}

No onsite Emergency Power (AC or DC) is provided
Specify Fixture Voltage: 120V or 277V Power Feed
A=120V or B=277V

LED Emergency Battery⁵⁰

REL67 = LED 23 Watt Cold Weather (Remote)
REL82 = LED 4 Watt (Remote)
REL85 = LED 20 Watt (Remote)
REL88 = LED 16 Watt (Remote)

NOTES:

- ¹ Consult Factory with requests regarding lamp sources, including LED, color temp., wattages or voltages not shown.
- ³ Consult Factory for additional Emergency Battery options.
- ⁵⁰ Max WHIP length with the REL provided by the factory is 8 feet.
- ⁵ Due to form and fit, final selection of the Battery Pack under discretion of Factory