

# Kiev 2

**Architectural Full Cutoff Wall Pack**  
**Selectable LED Wattage**  
**RoHS Compliant / Wet Location Listed**

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## SPECIFICATIONS

- APPLICATIONS — Colleges, Commercial Buildings, Offices, Hotels, Restaurants, Retail, Schools, Showrooms, Supermarkets.
- DIMMING — Wattage controller features 0-10VDC (100-30%) dimming capability.
- DRIVER — Universal Voltage 120/277V (50/60Hz) Electronic Driver.
- FINISH — UV stabilized powder coated bronze finish. Other colored finishes available for additional costs.
- HOUSING — Heavy duty die-cast aluminum with corrosion resistant hardware.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED) - Ra>70. Features integral wattage controller which allows the user to adjust the wattage to four preset levels.
- LENS — Heat and impact resistant polycarbonate lens.
- MOUNTING — Quick mount plate with built-in level bubble.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards.  
Buy American Act / DLC / Title 24 / RoHS Compliant. UL/cUL listed for Wet Locations.
- WARRANTY — 5-year Limited Warranty.



Wattage Controller



## ORDERING INFO

Series	Reflector	Wattage	CCT	Voltage	Finish	Options

### ORDERING GUIDE:

#### SERIES

KV2 = Kiev 2 Series

#### REFLECTOR

FT = Forward Throw Distribution  
 WS = Wide Spread Distribution

#### WATTAGE

SLED = \*Selectable LED Wattages: 15W/30W/50W/72W  
 — 8621 Lumens (Based on 72W-5000K)

\*Note: Fixtures will ship from factory at lowest wattage. It is the installer's responsibility to set the fixture at the desired wattage for their project.

#### COLOR TEMPERATURE (CCT)

4K = ±4000K range  
 5K = ±5000K range

#### VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

#### STANDARD FINISH

BZ = Bronze Finish — STANDARD

#### PREMIUM UPCHARGE FINISH

MOQ = 5 Pieces  
 BK = Black  
 SGR = Silver Gray  
 WH = White

#### PHOTOCELL OPTIONS

9328 = Photocell Button (120/277V)

#### CONTROL OPTIONS

OCC-BLD = Bi-Level Dimming | Occupancy Sensor Integral  
 — Microwave Sensor / 120/277V Only  
 — Max Mounting Height: 40ft  
 — Light Control: 100% | DIM | OFF  
 — Standby Dim Level Presets: 0% / 10% / 30% / 50%


#### EMERGENCY BATTERY OPTIONS

EL10W = Integral LED 10 Watt  
 EL10W-CW = Integral LED 10 Watt (Cold Weather)

#### ACCESSORY OPTIONS (order as a separate line)

REMT0009 = Remote Controller for Sensor Option

## DIMENSIONS

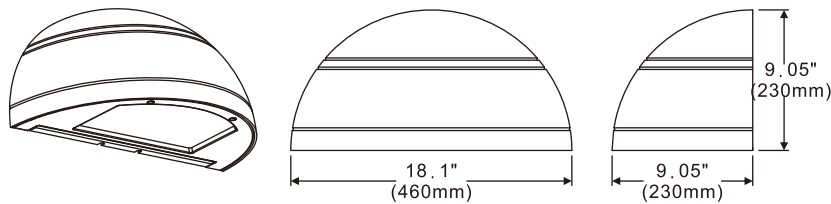

## OPTIONS



Photocell Button



Occupancy Sensor



Emergency Battery

# Kiev 2

**Architectural Full Cutoff Wall Pack**  
**Selectable LED Wattage**  
**RoHS Compliant / Wet Location Listed**


We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## PHOTOMETRY

Catalogue #: KV2-FT-LED70-4K   Test Date: 6/15/2021					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
8,152.7 Lumens	123.1 Lm/W	66.21W	4000K	Type III	B3-U2-G1

LCS Summary	
Zone	Lumens
Forward Low (0-30)	1510.6
Forward Medium (30-60)	3211.2
Forward High (60-80)	1044.6
Forward Very High (80-90)	62.6
Back Low (0-30)	1019.5
Back Medium (30-60)	1076.7
Back High (60-80)	186.2
Back Very High (80-90)	12.5
Up Low (90-100)	4.5
Up High (100-180)	24.3

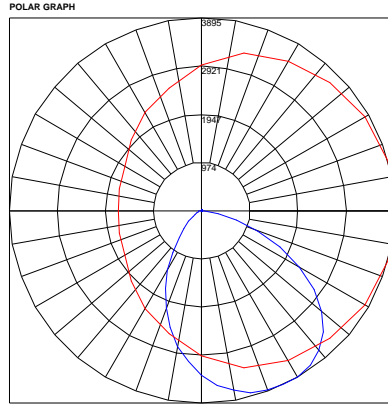

Catalogue #: KV2-FT-LED70-5K   Test Date: 6/11/2021					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
8,264.8 Lumens	124.9 Lm/W	66.14W	5000K	Type III	B3-U2-G1

LCS Summary	
Zone	Lumens
Forward Low (0-30)	1531.3
Forward Medium (30-60)	3255.2
Forward High (60-80)	1058.9
Forward Very High (80-90)	63.5
Back Low (0-30)	1033.5
Back Medium (30-60)	1091.5
Back High (60-80)	188.8
Back Very High (80-90)	12.7
Up Low (90-100)	4.6
Up High (100-180)	24.8

