

Malta 2

Architectural Full Cutoff Wall Pack
Selectable LED Wattage
RoHS Compliant / Wet Location Listed

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- APPLICATIONS — Colleges, Commercial Buildings, Offices, Hotels, Restaurants, Retail, Schools, Showrooms, Supermarkets.
- DIMMING — Wattage controller features 0-10VDC (100-30%) dimming capability.
- DRIVER — Universal Voltage 120/277V (50/60Hz) Electronic Driver.
- FINISH — UV stabilized powder coated bronze finish. Other colored finishes available for additional costs.
- HOUSING — Heavy duty die-cast aluminum with corrosion resistant hardware.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED) - Ra>70. Features integral wattage controller which allows the user to adjust the wattage to four preset levels.
- LENS — Heat and impact resistant polycarbonate lens.
- MOUNTING — Quick mount plate with built-in level bubble.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards. DLC / Title 24 / RoHS Compliant. UL/cUL listed for Wet Locations.
- WARRANTY — 5-year Limited Warranty.



Wattage Controller



ORDERING INFO

Series	Reflector	Wattage	CCT	Voltage	Finish	Options

SERIES

MA2 = Malta 2 Series

REFLECTOR

FT = Forward Throw Distribution
 WS = Wide Spread Distribution

WATTAGE

SLED = *Selectable LED Wattages: 15W/30W/50W/72W
 — 8621 Lumens (Based on 72W-5000K)

*Note: Fixtures will ship from factory at lowest wattage. It is the installer's responsibility to set the fixture at the desired wattage for their project.

COLOR TEMPERATURE (CCT)

4K = ±4000K range
 5K = ±5000K range

VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

STANDARD FINISH

BZ = Bronze Finish — STANDARD

PREMIUM UPCHARGE FINISH

MOQ = 5 Pieces
 BK = Black
 SGR = Silver Gray
 WH = White

PHOTOCELL OPTIONS

9328 = Photocell Button (120/277V)

CONTROL OPTIONS

OCC-BLD = Bi-Level Dimming | Occupancy Sensor Integral
 — Microwave Sensor / 120/277V Only
 — Max Mounting Height: 40ft
 — Light Control: 100% | DIM | OFF
 — Standby Dim Level Presets: 0% / 10% / 30% / 50%


EMERGENCY BATTERY OPTIONS

EL10W = Integral LED 10 Watt
 EL10W-CW = Integral LED 10 Watt (Cold Weather)

ACCESSORY OPTIONS (order as a separate line)

REMT0009 = Remote Controller for Sensor Option

DIMENSIONS

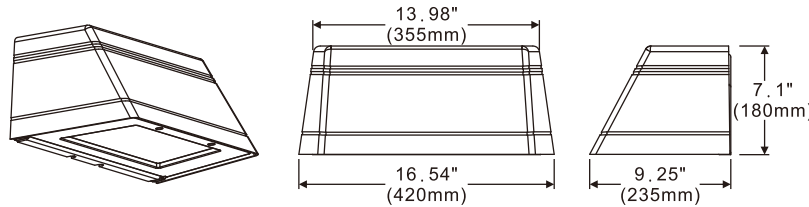

OPTIONS



Photocell Button



Occupancy Sensor



Emergency Battery

Malta 2


Architectural Full Cutoff Wall Pack
Selectable LED Wattage
RoHS Compliant / Wet Location Listed

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

PHOTOMETRY

Catalogue #: MA2-FT-LED70-4K Test Date: 6/11/2021					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
8,133.7 Lumens	122.3 Lm/W	66.52W	4000K	Type III	B3-U2-G1

LCS Summary	
Zone	Lumens
Forward Low (0-30)	1513.6
Forward Medium (30-60)	3184.4
Forward High (60-80)	1031.5
Forward Very High (80-90)	58.4
Back Low (0-30)	1025.5
Back Medium (30-60)	1084.9
Back High (60-80)	191.3
Back Very High (80-90)	13.3
Up Low (90-100)	5.0
Up High (100-180)	25.9

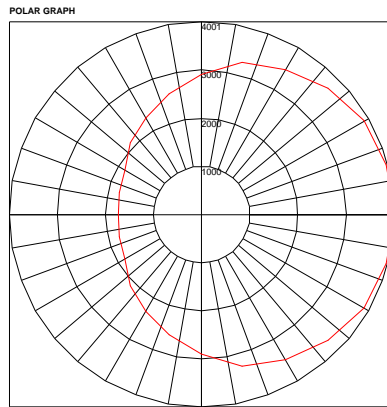

Catalogue #: MA2-FT-LED70-5K Test Date: 6/15/2021					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
8,154.9 Lumens	122.5 Lm/W	66.56W	5000K	Type III	B3-U2-G1

LCS Summary	
Zone	Lumens
Forward Low (0-30)	1517.5
Forward Medium (30-60)	3192.6
Forward High (60-80)	1034.1
Forward Very High (80-90)	58.6
Back Low (0-30)	1028.2
Back Medium (30-60)	1087.7
Back High (60-80)	191.9
Back Very High (80-90)	13.4
Up Low (90-100)	5.0
Up High (100-180)	25.9

