

# Naples

## EURO WALL PACK FAMILY

### Surface Mount

### Vandal Resistant LED



We reserve the right to revise the design or components of any product without notice.


CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

### SPECIFICATIONS

- DRIVER — Universal Voltage 120/277V Electronic Driver.
- HOUSING — Durable, vandal-resistant injection molded polycarbonate housing. Enclosure is fully sealed and gasketed.
- AMBIENT TEMP — 0°C - 40°C.
- FINISH — Polished bronze polycarbonate finish.
- OPTICS — Precision designed optics delivers optimal performance and even coverage. Beam angle (H-V) is 115°-110° to highlight key areas.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode.
- COMPLIANCE — Built to comply U.S. and Canadian safety standards. RoHS/ADA compliant, LED modules comply with IESNA LM-79/LM-80 standards.
- WARRANTY — 5-Year Limited Warranty.



### DIMENSIONS - inches(mm)

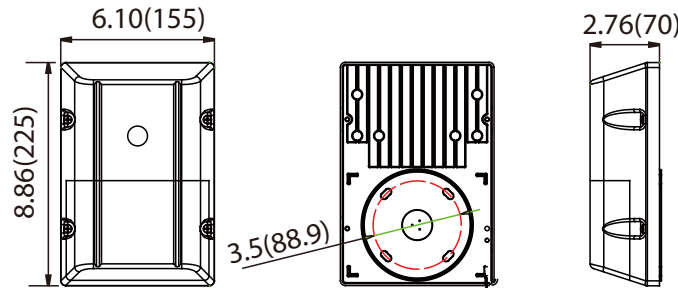

**ORDERING GUIDE:**

Series	Lamp/Wattage	Color	Voltage	Finish	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

**SERIES**  
NP = Naples Series

**LED WATTAGE**  
LED7 = 7 Watt LED  
LED10 = 10 Watt LED  
LED14 = 14 Watt LED

**LED COLOR TEMPERATURE**  
4K = ±4000K range  
5K = ±5000K range

**VOLTAGE**  
EBU = Universal Volt (120-277v) Electronic Driver

**FINISH**  
BZ = Bronze Finish – Standard

**OPTIONS**  
9328 = Universal Photocell – 120/277V

PHOTOMETRIC DATA

MODEL CODE	TEST WATTAGE	LUMENS	EFFICACY	EQUAL TO HID LAMP
NP-LED12-4K-EBU	13.02W	1301.39 LM	99.98 LPW	302 HPS

