

Normandy


FULL CUT-OFF LED WALL PACK FAMILY

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- HOUSING — Precision die cast aluminum housing with with stainless steel hardware.
- LENS — Tempered glass lens secured with stainless steel hardware.
- FINISH — Chip and fade resistant powder coat finish.
- MOUNTING — Mounts to standard 4" square electrical junction boxes.
- DRIVER — High temperature rated, universal voltage (120-277V) driver standard.
- PHOTOCELL — (Optional) Industrial grade dual voltage 120/277V photocell.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards.
Suitable for outdoor Wet locations. IP67 Tested and Rated.

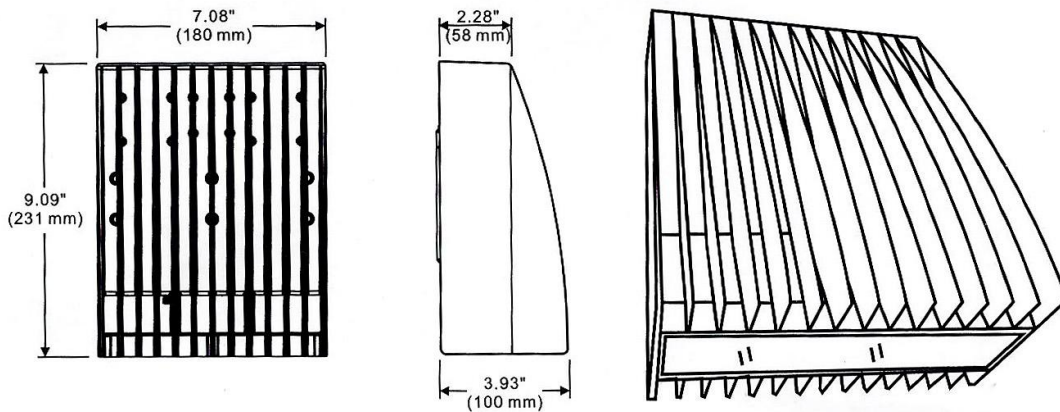

ORDERING GUIDE:

Series	LED Wattage	Color Temp	Voltage	Finish	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

SERIES
NY = Normandy Series

LED WATTAGE
LED20 = 20 Watt LED
LED30 = 30 Watt LED

COLOR TEMP (LED)
35K = ±3500K range LED
4K = ±4000K range LED
5K = ±5000K range LED

VOLTAGE
EBU = High Temp Universal Volt
(120-277V)

FINISH
BZ = Bronze Standard

OPTIONS
9328 = Integral Dual Voltage Photocell – 120/277V
MSI1 = Motion Sensor Integral (Microwave)
—Single Circuit: OFF / ALL-ON
MSI2 = Motion Sensor Integral (Microwave)
—Single Circuit: HALF-ON / ALL-ON
REL82 = Remote Emergency Battery: LED 4W