

Prague Series

Low Profile Vandal Resistant Wall Pack
Selectable Lumen Output / CCT
IP66 / IK10 Rated

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- APPLICATIONS — Building Exteriors, Outdoor Corridors, Garages, Paths and Outdoor Environments.
- DRIVER — Universal Voltage 120/277v Electronic Driver.
- EMERGENCY BATTERY — Optional 2-Watt Integral Emergency Battery.
- FINISH — Durable oven baked Polyester Powder coat finish.
- HOUSING — Aluminum Alloy.
- LENS — Polycarbonate Optical Lens.
- LIGHT DISTRIBUTION — Type IV.
- LIGHT ENGINE — Energy Efficient LED. Lumen Output/CCT can be adjusted via Integral Controller.
- LIGHT LIFESPAN — 131,000hrs (L70).
- MOUNTING — Quick and easy wall mount installation via removable back plate.
- PHOTOCELL — Standard Photocell Sensor.
- OPERATING TEMPERATURE — -30°C to +50°C / -22°F to +122°F
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.
IP66 / IK10 Rated. 4KV Surge Protection.



ORDERING INFO

Series	Wattage	CCT	Voltage	Finish	Options
ORDERING GUIDE:					

SERIES

PG = Prague Series

WATTAGE

Note: Lumen Output can be adjusted via Integral Controller.

- SLED15 = *15 Watt LED
- SLED25 = *25 Watt LED
- SLED35 = *35 Watt LED
- SLED45 = *45 Watt LED
- SLED55 = *55 Watt LED

COLOR TEMPERATURE (CCT)

Note: Color temperature can be adjusted via Integral Controller
 SCCT = *Selectable CCT: 3000K | 4000K | 5000K

*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

STANDARD FINISH


BK = Black Finish

EMERGENCY BATTERY OPTION


Note: Emergency battery options **not compatible** with SLED45 or SLED55

EL2W=2 Watt Emergency Battery | 3-Hour

DIMENSIONS

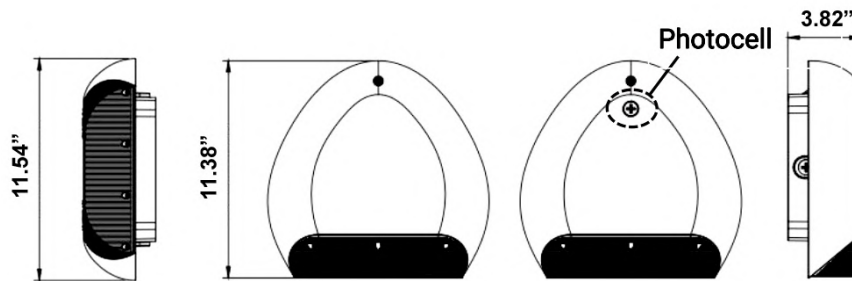

INTEGRAL CONTROLLER

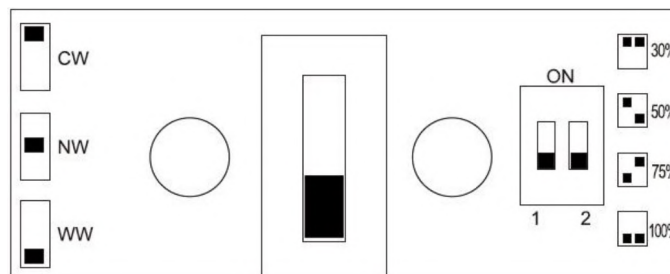

Features

- Lumen Output Settings: 30%, 50%, 75%, 100%.
- CCT Settings: 5000K (Cool White) 4000K (Natural White) 3000K (Warm White)

Prague Series

Low Profile Vandal Resistant Wall Pack
 Selectable Lumen Output / CCT
 IP66 / IK10 Rated


We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

PHOTOMETRIC DATA


Summary of Results PG-SLED25-5K					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
3184.3 Lumens	133.2 Lm/W	23.9W	5000K	Type IV	B1-U3-G2

LCS Summary	
Zone	Lumens
Forward Low (0-30)	377.5
Forward Medium (30-60)	898.6
Forward High (60-80)	527.2
Forward Very High (80-90)	206.1
Back Low (0-30)	248.8
Back Medium (30-60)	298.4
Back High (60-80)	83.9
Back Very High (80-90)	12.0
Up Low (90-100)	172.0
Up High (100-180)	359.8

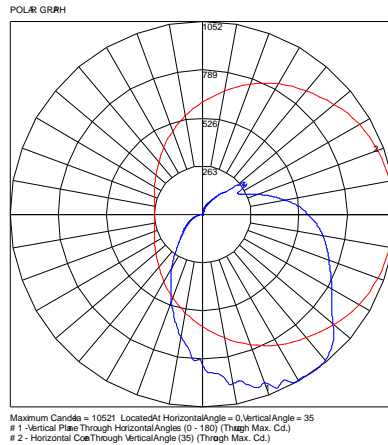

Summary of Results PG-SLED35-5K					
Lumen Output	Efficacy	Input Power	CCT	Distribution	BUG Rating
4751.1 Lumens	130.9 Lm/W	36.3W	5000K	Type IV	B1-U4-G3

LCS Summary	
Zone	Lumens
Forward Low (0-30)	573.4
Forward Medium (30-60)	1309.0
Forward High (60-80)	776.6
Forward Very High (80-90)	299.7
Back Low (0-30)	383.5
Back Medium (30-60)	460.6
Back High (60-80)	139.6
Back Very High (80-90)	21.6
Up Low (90-100)	253.5
Up High (100-180)	533.6

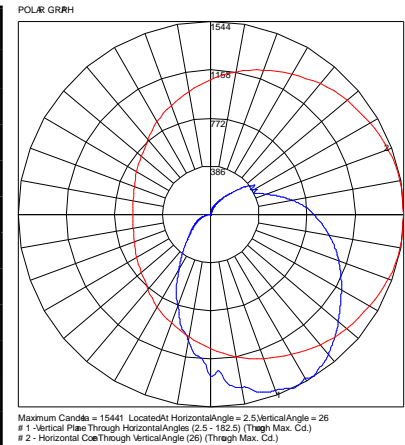

Lumen Output Based On 4000K CCT				
	Lumens @ 100% Power / Wattage	Lumens @ 75% Power / Wattage	Lumens @ 50% Power / Wattage	Lumens @ 30% Power / Wattage
SLED15	1950 Lms / 15W	1462 Lms / 11W	975 Lms / 7W	585 Lms / 4W
SLED25	3200 Lms / 25W	2400 Lms / 19W	1600 Lms / 12W	960 Lms / 7W
SLED35	4550 Lms / 35W	3375 Lms / 26W	2250 Lms / 17W	1365 Lms / 10W
SLED45	5800 Lms / 45W	4350 Lms / 34W	2900 Lms / 22W	1740 Lms / 13W
SLED55	6555 Lms / 55W	4916 Lms / 41W	3277 Lms / 27W	1966 Lms / 16W