

# Seville


## FULL CUT-OFF WALL PACK FAMILY Vandal Resistant LED

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

### SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver is standard for LED.
- EMERGENCY — Remote — LED.
- GASKETING — High temperature, non-aging black EPDM or neoprene rubber around the entire lens perimeter and rear wire entrance hole to protect against dust, moisture and outside contaminants..
- HOUSING — Heavy wall cast aluminum, finished in Bronze oven baked Polyester Powder Coat.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED).
- MOUNTING— Shallow Back Flush Mount. Large open Heat Sink Mount for OEM customization of LED mounts. Deep Back Mount for Conduit and Battery Backup Capability.
- REFLECTOR — Aluminum.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.

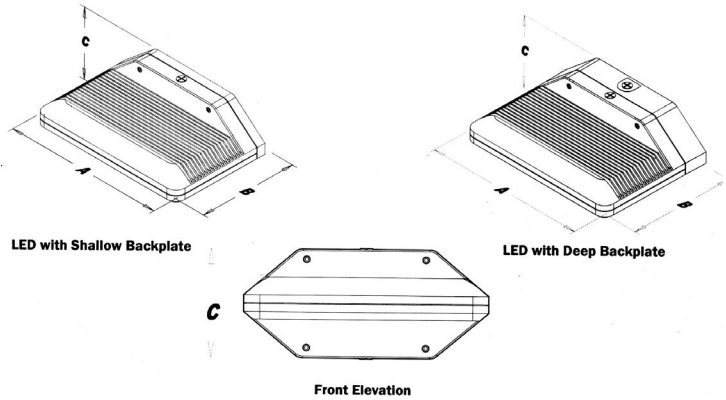

**ORDERING GUIDE:**

Series	Size	Lamp/Wattage	Color	Voltage	Finish	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

### SERIES

SV = Seville Series

### SIZE

S = Small — 11"W x 6¾"H x 9¼"D  
M = Medium — 15½"W x 7"H x 11"D

### LED WATTAGE<sup>1</sup>

LED30 = 30 Watt LED  
LED40 = 40 Watt LED (Medium Size Only)

### LED COLOR TEMPERATURE

3K = ±3000K range  
4K = ±4000K range  
5K = ±5000K range  
6K = ±6000K range

### VOLTAGE

EBU = Universal Volt (120-277v)

### FINISH (HOUSING COLOR)

BK = Black Finish  
BZ = Bronze Finish – Standard  
PNA = Painted Natural Aluminum  
WH = White Finish

### OPTIONS

BB = Backbox (for Conduit and Battery Backup Capability)

### LED OPTIONS

D7 = 0-10V low-voltage LED Dimming (100-30% Std., Consult Factory for Other)  
D8 = LED Dimming: Forward Phase (Triac)  
MS11 = Motion Sensor Integral<sup>2</sup> (Microwave)  
—Single Circuit: OFF / ALL-ON  
MS12 = Motion Sensor Integral<sup>2</sup> (Microwave)  
—Single Circuit: HALF-ON / ALL-ON

### EMERGENCY BATTERY OPTIONS<sup>3 5</sup>

*No onsite Emergency Power (AC or DC) is provided*  
*Specify Fixture Voltage: 120V or 277V Power Feed*  
A=120V or B=277V

**LED Emergency Battery<sup>50</sup>** \_\_\_\_\_  
Premium (Bodine/Iota)  
REL60 = LED 7 Watt (Remote)

### NOTES:

- Consult Factory with requests regarding lamp sources, including LED, color temp., wattages or voltages not shown.
- Max mounting height of fixture is 10 feet.
- Max WHIP length with the REL provided by the factory is 8 feet.
- Due to form and fit, final selection of the Battery Pack under discretion of Factory