

# Titan 2

## Curved Front Fascia Shield Wall Wash Indoor/Outdoor Sconce

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

### SPECIFICATIONS

- BACKPLATE — 16 Ga. aluminum (AL).
- BACKBOX — 16 Ga. aluminum (AL) with wire access on four sides and back through 7/8" dia. KO flattened water tight (Required for Emergency Battery Option).
- DIFFUSER — White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8"). Clear top and bottom (CTB) for uplight/downlight is Standard. Optional Dark Sky Compliance (DS).
- DRIVER — Universal volt (120-277v) electronic driver with 0-10V dimming is standard.
- FASTENERS — Stainless steel tamperproof screws —(2) To secure lens in place.
- FINISH — Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
- GASKETING — High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.
- MOUNTING — Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor. 7/8" KO in Center for Wire Access. Must derate lamping for horizontal.
- FASCIA SHIELD — Solid Front (SF) Aluminum Shield is standard. Optional Center Square Window (CSQ), and Four Square Window (4SQ) also available.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations. Dark Sky Compliant with Downlight (DN) Only option.



**Titan 2 - Medium**  
Shown with Center Square Window (CSQ)



### ORDERING INFO

Series	Size	Shield	Wattage	CCT	Voltage	Finish	Options

### ORDERING GUIDE:

#### SERIES

T12 = Titan 2 Series

#### SIZE

- M = Medium: 12½"W x 11¼"H x 4"D
- L = Large: 13"W x 13"H x 4"D
- XL = X-Large: 11¼"W x 18"H x 5"D

#### FASCIA SHIELD

- CSQ = Center Square Window<sup>59</sup>  
— Add Center LED 5W Standard
- 4SQ = Four Square Windows<sup>2 59</sup>  
— Add Center LED 10W Standard
- SF = Solid Front Shield — Standard
- CWN = Custom Windows (Consult Factory)<sup>59</sup>

#### WATTAGE

See Chart Below for Size/Wattage Compatibility

- UP(xx)/DN(xx) = UP/DN (xx = Wattage, ex: UP5/DN5)
- UP(xx) = UP (xx = Wattage, ex: UP10) - Uplight Only
- DN(xx) = DN (xx = Wattage, ex: DN10) - Downlight Only  
— Dark Sky Compliant

#### COLOR TEMPERATURE (CCT)

- 3K = ±3000K Range
- 35K = ±3500K Range
- 4K = ±4000K Range
- 5K = ±5000K Range

#### VOLTAGE

- 347 = 347 Volts
- UNV = Universal Volt (120-277v) Driver

#### STANDARD PAINTED FINISH

- BK = Black Finish
- BZ = Bronze Finish
- PNA = Painted Natural Aluminum
- SGR = Silver Gray
- WH = White Finish

#### PREMIUM UPCHARGE FINISH

- CC = Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))
- +NAT = Epoxy Coating for Natatorium

#### PHOTOCELL OPTIONS

- 9328 = Photocell Button (120/277V)<sup>2</sup>

#### BACK BOX OPTIONS

- BBM = Back Box Medium: 11½"H x 2"D
- BBL = Back Box Large: 13¼"H x 2"D
- BBXL = Back Box X-Large: 16"H x 2"D

#### MISC OPTIONS

- FUS = Single Fusing (120V)<sup>2</sup>
- TP = Tamperproof Screws

#### EMERGENCY BATTERY OPTIONS<sup>59 57</sup>

Meets California Energy Commission Title 20:  
(CEC-400-2014-009-CMF) Efficiency Standards

- EL8W = Integral LED 8 Watt<sup>2 57</sup>
- EL10W = Integral LED 10 Watt<sup>2 57</sup>
- EL16W = Integral LED 16 Watt<sup>2 57</sup>

- REL8W = Remote LED 8 Watt<sup>50 57</sup>
- REL10W = Remote LED 10 Watt<sup>50 57</sup>
- REL16W = Remote LED 16 Watt<sup>50 57</sup>

#### Cold Weather Emergency Batteries:

Operating Temp: -20°C thru 50°C / NON-CEC Compliant  
EL10W-CW = Integral LED 10 Watt (Cold Weather)<sup>2 57</sup>

- REL10W-CW = Remote LED 10 Watt (Cold Weather)<sup>50 57</sup>

#### ACCESSORY OPTIONS (order as a separate line)

- 9002 = Tamperproof Screwdriver

#### NOTES:

- <sup>2</sup> Backbox (BB) Required.
- <sup>50</sup> Max WHIP length of the REL is 8 feet.
- <sup>59</sup> Final selection of the Battery Pack under discretion of Factory.
- <sup>57</sup> Emergency Battery available for L and XL Size Only.
- <sup>69</sup> Not available with Dark Sky option (DN)

Fixture Size	Dimensions	Wattages (UP = Uplight / DN = Downlight)
MEDIUM	12½"W x 11¼"H x 4"D	UP5 Only   DN5 Only UP5/DN5 = 10 Watt Total
LARGE	13"W x 13"H x 4"D	UP5 Only / UP10 Only   DN5 Only / DN10 Only UP5/DN5 = 10 Watt Total   UP10/DN10 = 20 Watt Total
X-LARGE	11¼"W x 18"H x 5"D	UP15 Only   DN15 Only UP15/DN15 = 30 Watt Total


# Titan 2

*Curved Front Fascia Shield*  
*Wall Wash Indoor/Outdoor Sconce*

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## DIMENSIONS

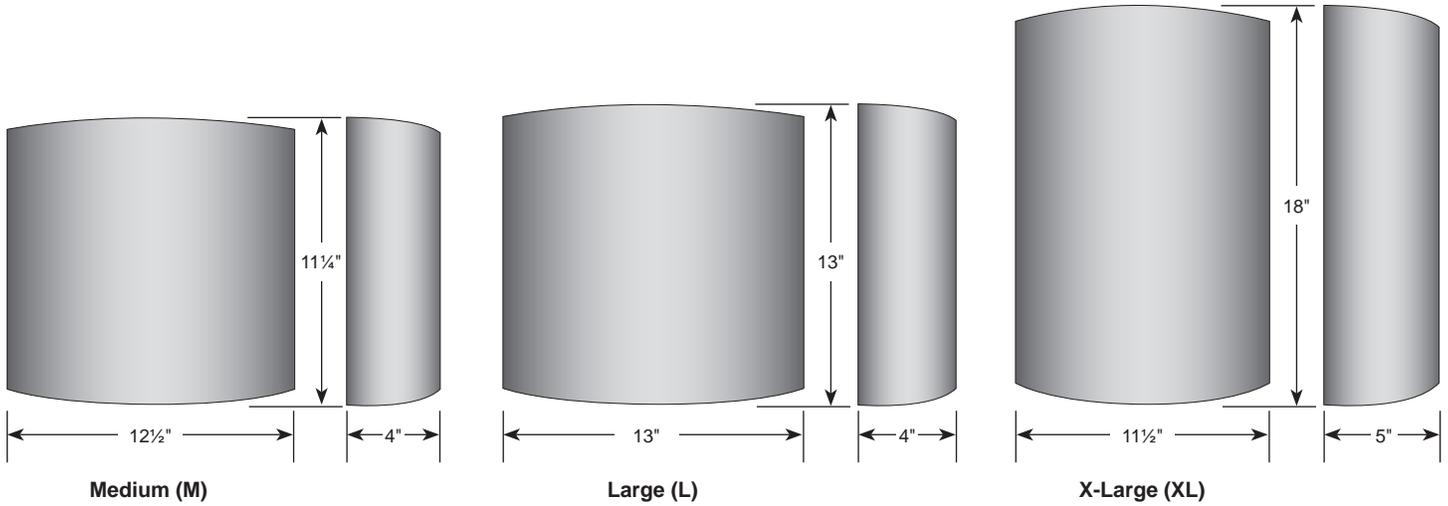


## OPTIONS



**Center Square Window (CSQ)**  
 Downlight Only (DN) - Dark Sky Compliant



**Solid Front Shield (SF)**  
 Downlight Only (DN) - Dark Sky Compliant

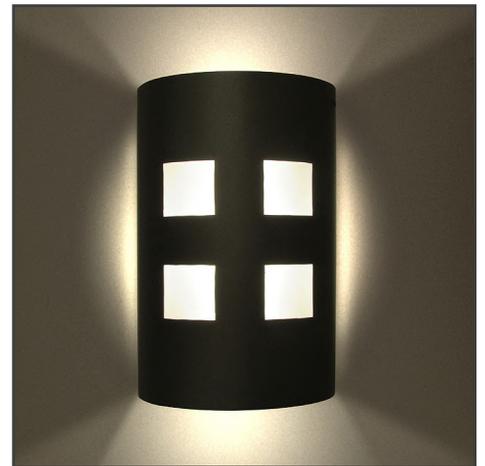

**Four Square Windows (4SQ)**