

WL101


FULL CUT-OFF WALL PACK FAMILY

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- HOUSING — Non Corrosive Hardware.
- DIFFUSER — Polycarbonate Opal Lens.
- DRIVER — 120/277 volt Electronic for LED.
- FINISH — Oven baked polyester powder coat.
- MOUNTING — Surface Wall Mount.
- LAMP — Energy Efficient Light Emitting Diode (LED).
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards.
Suitable for Wet Locations.

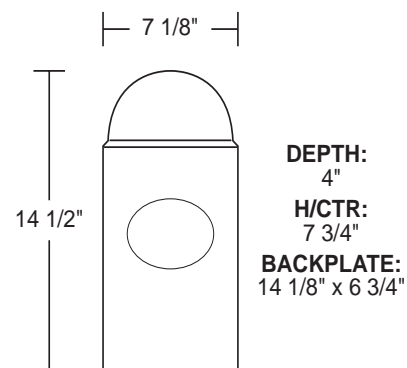

WL101 Dimensions

ORDERING GUIDE:	Series	Lamp/Wattage	Color Temp	Voltage	Options	Finish

SERIES

WL101 = TL101 Series

LAMP TYPE/QUANTITY/WATTAGE

LED12 = 12 Watt LED
(Energy Star Compliant)

COLOR TEMPERATURE

3K = ±3000K range (120 Initial LPW)
4K = ±4000K range (132 Initial LPW)

VOLTAGE

120 = 120 Volts
277 = 277 Volts
EBU = High Temp Universal Volt (120-277V)

OPTIONS

9328 = Universal Voltage Photocell (120/277V)

FINISH

BK = Black
BZ = Bronze
GR = Gray
SN = Sand
WH = White

