

CSQ Series

Indoor Fixture


Ceiling or Wall Family—Damp Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		


SPECIFICATIONS

- DRIVER — 120-277V Electronic Driver Standard. Dimmable Driver Optional.
- DIFFUSER — White acrylic silhouette square diffuser.
- EMERGENCY — LED — Remote Only.
- LATCHES — A unique latch system which is hidden by the diffuser contributes to the low profile design and allows for various mounting angles.
- LIGHT ENGINE — Super Bright White LED.
- HOUSING — Extremely shallow white metal housing finished with a high gloss powder coated/baked white enamel finish for maximum light reflectivity.
- MOUNTING — Suitable for either ceiling or wall mounts.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for damp locations. (Covered Ceiling Only).

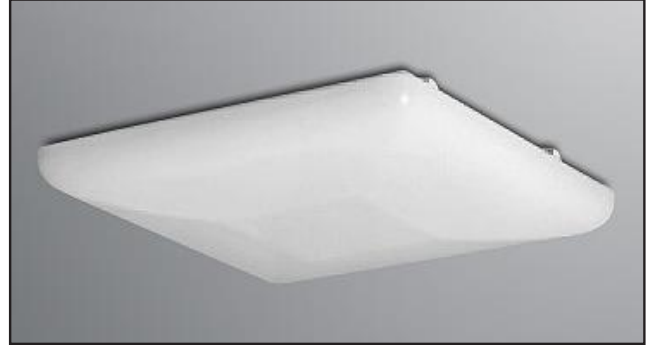

ARRA
Compliant

DIMENSIONS

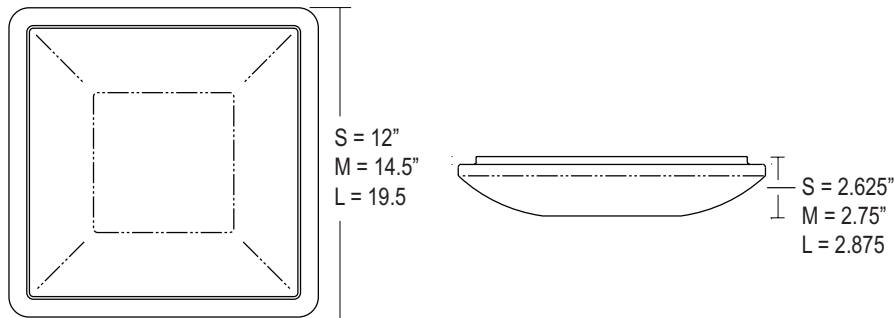

Light Engine/Wattage ①			
Fixture	CSQ-S	CSQ-M	CSQ-L
Dimensions - W x H x D	12"sq x 2.625"	14.5"sq x 2.75"	19.5"sq x 2.875"
Light Emitting Diode	LED	15/25w	25w
			30w

Series	Size	Lamp/Wattage	Color Temp	Voltage	Finish	Options

SERIES

CSQ = Low Profile Silhouette
Decorative Surface Series

SIZE

- S = 12" square x 2.625" deep
- M = 14.5" square x 2.75" deep
- L = 19.5" square x 2.875" deep

LED LIGHT ENGINE WATTAGE

See Table Above

LED COLOR TEMPERATURE

- 3K = ±3000K LED Color Temp.
- 4K = ±4000K LED Color Temp.
- 5K = ±5000K LED Color Temp.

VOLTAGE

- EBU = Universal Volt (120-277v) Electronic Driver
- 2EBU = Two Universal Volt (120-277v) Electronic Drivers

FINISH

- WH = White Finish
- CC = Custom Color (Consult Factory)

OPTIONS

- BL1 = Bi-Level Light (High/Low)
— Single AC Input Feed, with Switch Sensor (Required)
- BL2 = Bi-Level Light (High/Low)
— Wired for Dual AC Input Feeds
- D7 = 0-10V low-voltage LED Dimming
— (100-30% Standard, Consult Factory for Other)
- D8 = LED Dimming: Forward Phase/Leading Edge (Triac)
— Consult Factory
- D9 = LED Reverse Phase/Trailing Edge ELV - Consult Factory
- D11 = DALI LED Dimming Driver - Consult Factory
- D12 = Lutron Dimming Driver - Consult Factory

EMERGENCY BATTERY OPTIONS

No onsite Emergency Power (AC or DC) is provided
Specify Fixture Voltage: 120V or 277V Power Feed
A=120V or B=277V

LED Emergency Battery

Factory Recommended

- REL82 = LED 4 Watt (Remote)
- REL85 = LED 20 Watt (Remote)
- REL88 = LED 16 Watt (Remote)