

Clark Shallow

Indoor/Outdoor Low Profile Luminaire Ceiling, Wall, Pendant Family ADA Compliant

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DIFFUSER — Opal white polycarbonate — Standard. Optional opal white acrylic.
- DRIVER — Universal Voltage 120/277v Electronic Driver with 0-10V dimming is standard.
- EMERGENCY — Remote or Integral Emergency Battery.
- FINISH — Polyester powder coat white Standard.
- GASKETING — High temp., non-aging black EPDM and/or neoprene rubber concealed in housing pocket and enclosed by cast-in drip shield and rear wire entrance hole to protect against outside contaminants.
- HOUSING — CK-S: Aluminum pan furnished with J-box mounting hardware for surface ceiling or wall mount.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode.
- MOUNTING — CK-S: Center access hole for mounting to (3) standard trade “J” boxes. (Contractor selected and drilled). Optional pendant mount available (Indoor Only).
- REFLECTOR — .032 textured aluminum for high efficiency and reduce arc tube voltage rise.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for Wet Locations. **ADA Compliant / Made in USA / Buy America Compliant / Buy American Act.**



ORDERING INFO

Series	Wattage	CCT	Voltage	Finish	Options

ORDERING GUIDE:

SERIES

CK-S = Clark Shallow Series

LED WATTAGE

See Wattage/Color Temp Chart Below for Lumen Output

LED15 = 15 Watt LED

LED25 = 25 Watt LED

LED35 = 35 Watt LED

LED COLOR TEMPERATURE (CCT)

3K = ±3000K range

4K = ±4000K range

5K = ±5000K range

VOLTAGE

347 = 347 Volts

UNV = Universal Volt (120-277v) Electronic Driver

2UNV = Two Universal Volt(120/277v) Electronic Drivers

FINISH

BK = Black Finish

BZ = Bronze Finish

PNA = Painted Natural Aluminum

WH = White Finish Standard

+NAT = Conformal Coating - Light Engine Only

CC = Custom Color (Visit www.ralcolor.com)

— Provide RAL# or Make-to-Match Color Chip

MOUNTING OPTIONS

PENDC = Pendant Mount with Air Craft Cable

PEND = Pendant Mount

-1/2" IPS Conduit Stem (12" is Standard)

-For Other Stem Lengths (Consult Factory)

Choose Pendant Canopy Style:

SWC-R = Swivel Canopy for 4" Round J-Box

SWC-RR = Swivel Canopy for 4" Round J-Box

— Rapid Mount with Hinged Door

SWC-S = Swivel Canopy for 4" Square J-Box

SWC-SR = Swivel Canopy for 4" Square J-Box

— Rapid Mount with Hinged Door

Note: See Page 3 for Images/Examples

DIMMING OPTIONS

Note: 0-10V 100%-30% is Standard

D7A = 0-10VDC LED Dimming Driver (100-10%)

D7B = 0-10VDC LED Dimming Driver (100-1%)

CONTROL OPTIONS

Note: See Accessory Options for Required Remote Controller

OCC = Occupancy Sensing | Motion Sensor Integral[Ⓢ]

— Microwave / Single Feed / 120/277V Only

— Standby Dim Level Presets: ON/OFF (0%/100%)

BLD = Bi-Level Dimming | Motion Sensor Integral[Ⓢ]

— Microwave / Single Feed / 120/277V Only

— Standby Dim Level Presets:

10% / 20% / 30% (Standard) / 50%

BLS = Bi-Level Switching — Using 2 Drivers (2UNV)

MISC OPTIONS

ACR = Opal White Acrylic Diffuser

WET = Wet Location

EMERGENCY / BATTERY OPTIONS[Ⓢ] [Ⓢ] [Ⓢ]

No onsite Emergency Power (AC or DC) is provided

Meets California Energy Commission Title 20:

(CEC-400-2014-009-CMF) Efficiency Standards

REL4W = Remote LED 4 Watt

REL8W = Remote LED 8 Watt

REL16W = Remote LED 16 Watt

Cold Weather Emergency Batteries:

Operating Temp: -20°C thru 50°C / NON-CEC Compliant

REL10W-CW = Remote LED 10 Watt (Cold Weather)

REL23W-CW = Remote LED 23 Watt (Cold Weather)

ACCESSORY OPTIONS (order as a separate line)

REMT = Remote Controller for Sensor Options

NOTES:

[Ⓢ] Consult Factory for additional Emergency options not shown


[Ⓢ] Max mounting height of fixture is 18' (18 feet)

[Ⓢ] Max WHIP length of the REL is 8 feet.



[Ⓢ] Final selection of the Battery Pack under discretion of Factory

LED Watts vs. LED Color Temp — Lumen Output			
WATTAGE	3000K (3K)	4000K (4K)	5000K (5K)
15 WATT	2010 Lumens	2115 Lumens	2145 Lumens
25 WATT	2680 Lumens	2820 Lumens	2860 Lumens
35 WATT	3820 Lumens	4015 Lumens	4070 Lumens


DIMENSIONS




**Clark Shallow
Series Mounting**

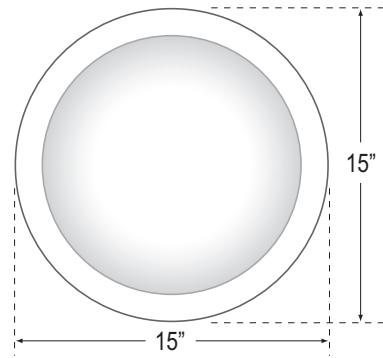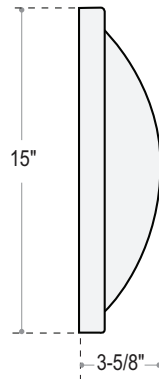

OPTIONS

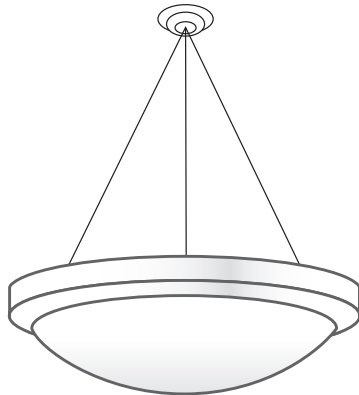

**Clark Shallow Featuring
Pendant Air Craft Cable Option (PENDC)
*Indoor Only**

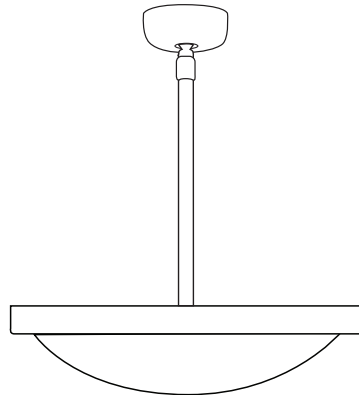

**Clark Shallow Featuring
Pendant with Swivel Canopy (PEND)
*Indoor Only**


PENDANT SWIVEL CANOPY TYPES




Swivel Canopy 4" for Round/Octagonal J-BOX (SWC-R)



Swivel Canopy 4" for Square J-BOX (SWC-S)

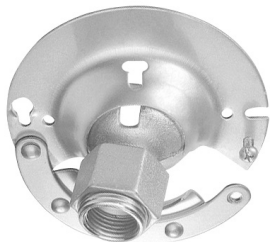

**Swivel Canopy 4" for Round/Octagonal J-BOX
Rapid Mount with Hinged Door
(SWC-RR)**

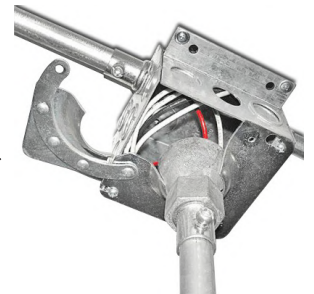

**Swivel Canopy 4" for Square J-BOX
Rapid Mount with Hinged Door
(SWC-SR)**