

# Lakeshore

## Low Profile LED Luminaire

## Selectable LED Wattage / CCT

## Indoor/Outdoor - Damp Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

### SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver with 0-10V dimming (100-30%).
- DIFFUSER — Opal white acrylic. Secures to housing pan without visible hardware.
- EMERGENCY — Optional Remote Emergency Battery.
- FINISH — Polyester powder coat white is Standard. Premium upcharge finishes available.
- LIGHT ENGINE — Energy Efficient LED - Selectable Wattage / CCT.
- HOUSING — Heavy gauge CRS pan.
- MOUNTING — Furnished with J-Box mounting hardware for surface ceiling or wall mount.  
Pendant and Aircraft Cable options available.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for damp locations. (Covered Ceiling Only).



### ORDERING INFO

Series	Size	Wattage	CCT	Voltage	Finish	Options
<b>LS</b>		<b>SLED</b>	<b>SCCT</b>	<b>UNV</b>		

#### SERIES

LS = Lakeshore Series

#### SIZE

- S = Small: 13" Diameter x 3/8" Depth
- M = Medium: 17" Diameter x 3/8" Depth
- L = Large: 21" Diameter x 3/8" Depth

#### WATTAGE

- SLED = \*Selectable LED Wattage
  - Wattages (Small): 15W | 17W | 20W
  - Wattages (Medium): 20W | 30W
  - Wattages (Large): 20W | 30W

#### COLOR TEMPERATURE (CCT)

SCCT = \*Selectable CCT: 3000K | 3500K | 4000K | 5000K

\*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

#### VOLTAGE

UNV = Universal Voltage (120-277v) Driver

#### STANDARD FINISH

WH = White Finish

#### PREMIUM UPCHARGE FINISH

- BK = Black Finish
- BZ = Bronze Finish
- PNA = Painted Natural Aluminum
- CC = Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))
  - Provide RAL# or Make-to-Match Color Chip <sup>20</sup>

#### MOUNTING OPTIONS

- ACT10 = 10ft Aircraft Cable Mount
  - Includes 120" Adjustable Cables with Canopy
- PEND12 = Pendant Mount (12" Stem)
  - Includes Canopy Swivel Kit (45°)
- PEND(XX) = Pendant Mount with Custom Stem Length (XX")
  - Includes Canopy Swivel Kit (45°)

#### UPLIGHT OPTION

- UPL = Uplight
  - Includes 7W Uplight and Dust Cone

#### SENSOR CONTROL OPTIONS

- OCC = Occupancy Sensing | Motion Sensor Integral <sup>20</sup>
  - Microwave / Single Feed / 120/277V Only
  - Standby Dim Level Presets: ON/OFF
- BLD = Bi-Level Dimming | Motion Sensor Integral <sup>20</sup>
  - Microwave / Single Feed / 120/277V Only
  - Standby Dim Level Presets:
    - 10% / 20% / 30% (Standard) / 50%

#### EMERGENCY BATTERY OPTIONS <sup>50</sup> <sup>55</sup>

**Meets California Energy Commission Title 20:**  
(CEC-400-2014-009-CMF) Efficiency Standards

- REL4W = Remote LED 4 Watt
- REL8W = Remote LED 8 Watt


#### ACCESSORY OPTIONS (order as a separate line)

REMT0009 = Remote Controller for Sensor Options

#### NOTES:

- <sup>20</sup> Max mounting height of fixture is 18' (18 feet).
- <sup>28</sup> Subject to Setup Fee and Deposit.
- <sup>50</sup> Max WHIP length of the REL is 8 feet.
- <sup>55</sup> Final selection of the Battery Pack under discretion of Factory.

### DIMENSIONS

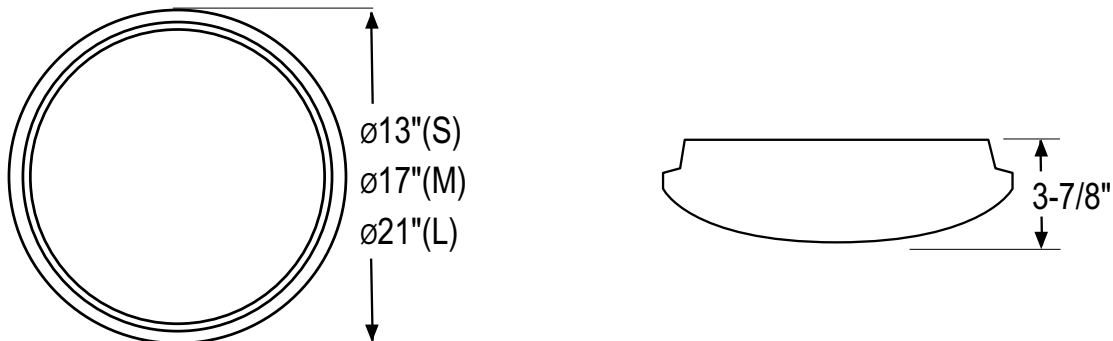

# Lakeshore

*Low Profile LED Luminaire*

*Selectable LED Wattage / CCT*

*Indoor/Outdoor - Damp Location*

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## OPTIONS



**Ceiling Mount - STANDARD**




**Pendant Mount (PEND12)**  
*Shown with Standard 12" Stem*



**10' Aircraft Cable Suspension (AC10)**  
*Shown with Uplight (UPL) Option*

## PENDANT CANOPY SWIVEL KIT

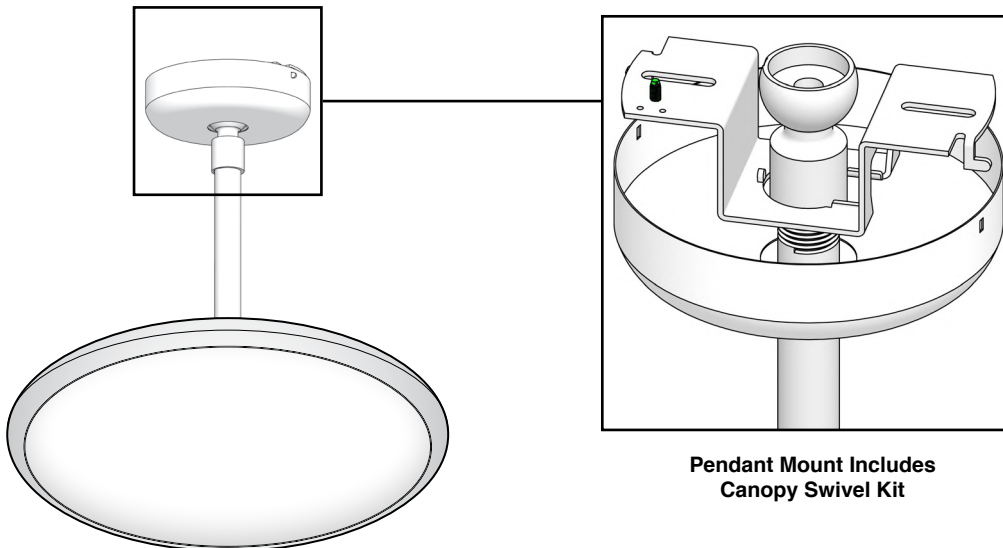

**Pendant Mount Includes  
Canopy Swivel Kit**