

# Quarter Sphere "QS" DECORATIVE SURFACE SERIES

Wall Mount Low Profile Fluorescent Fixture

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		




Quarter Sphere with Polished Brass Trim (PBT)—STANDARD



Optional Less Trim (LT)



Optional Faux Alabaster (FA)  
and Less Trim (LT)

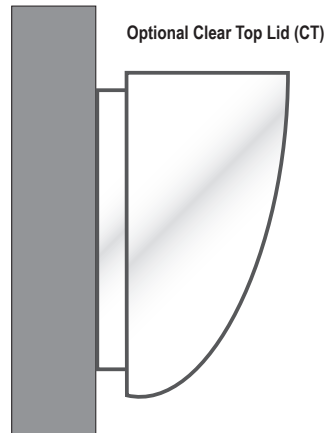

Optional Clear Top Lid (CT)

## SPECIFICATIONS

- BALLAST — For Compact Fluorescent Electronic Cold Weather HPF is Standard.
- DIFFUSER — Opal Acrylic
- FINISH — White Finish Standard. Faux Alabaster or Custom Color Diffuser is optional.
- LAMPS — Compact Fluorescent Double Twin Tube (DTT), Triple Twin Tube (TTT); Super Bright White LED.
- PAN — White Powder Coat Finished Steel, Low Profile, No Visible Hardware
- TRIM — Standard Decorative (PBT) Polished Brass Trim; Optional Polished Chrome Trim
- UL/ULC Listed to U.S. and Canadian safety standards - Indoor Use ONLY.

LAMP TYPE/QTY/WATTAGE <sup>1</sup>			
Fixture		Quarter Sphere Small	Quarter Sphere Medium
Dimensions - W x H x D (nominal)		16" x 6½" x 4"	19" x 8½" x 4"
Compact Fluorescent Double Twin Tube	DTT	(1 or 2)13w; (1)26w	(1 or 2)13/18/26w
Light Emitting Diode	LED	15w	20w

## ORDERING GUIDE:

SERIES	SIZE	LAMP/QTY/WATT	COLOR TEMP	VOLTAGE/PWR FACTOR	FINISH	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

### NOTES:

- Consult Factory with requests regarding lamp sources, wattages or voltages not shown.
- Consult Factory for additional Emergency Battery options not shown.

### SERIES

QS = Quarter Sphere Series

### SIZE

S = 16" Outside Diameter  
M = 19" Outside Diameter

### LAMP TYPE/LAMP QUANTITY/WATTAGE Refer to Above Chart

### LED COLOR TEMP

3K = 3000 K range  
4K = 4000 K range  
5K = 5000 K range  
6K = 6000 K range

### VOLTAGE

120 = 120 Volts  
277 = 277 Volts  
347 = 347 Volts (Consult Factory)  
EBU = Universal Voltage (120-277v)  
Programmable Start  
Electronic Ballast

### POWER FACTOR

EB = Electronic Ballast

### FINISH

CC = Custom Color Finish  
WH = White Finish Standard

### OPTIONS

CT = Clear Top Lid (NO TRIM)  
FUS = Single GLR Fuse and Fuse Holder  
DFUS = Double Fusing and Holder  
DIM = Dimming Ballast  
FA = Faux Alabaster Diffuser  
(Consult Factory)  
LT = Less Trim (req'd with CT)  
PCHT = Polished Chrome Trim  
EMERGENCY OPTIONS<sup>2</sup>  
REL2 = Remote Emergency Battery  
TTT; 1-2 Lamp; 650 Lumens