

Aries 2


Super Slim Galileo Sconce Narrow Rectangular Diffuser with Shield

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal Volt (120-277v) electronic driver with 0-10V dimming is standard.
- BACKPLATE — 16 Ga. aluminum (AL).
- DIFFUSER — White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8").
- SHIELD — Solid Aluminum Opaque Shield with Optional Center-Cut Aperture along length of fixture - specify shield finish. Optional Color Window.
- FINISH — Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
- GASKETING — High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.
- FASTENERS — Stainless steel tamperproof screws —(2) To secure lens in place.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode.
- MOUNTING — Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor (no center access hole for J-Box mount). Must derate lamping for horizontal.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.

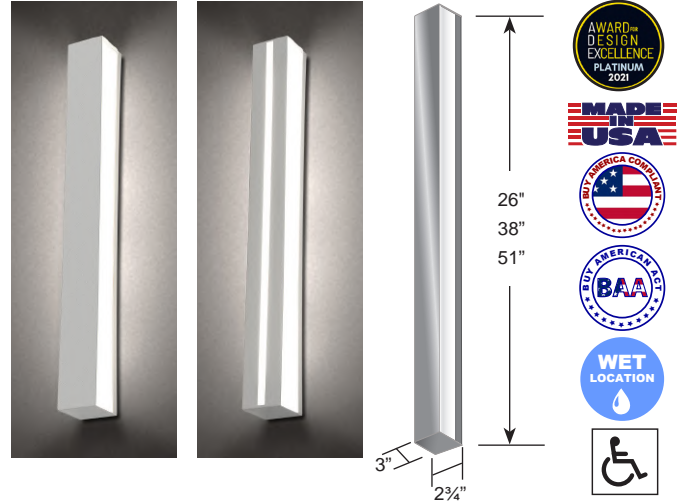

Series	Size	Wattage	CCT	CRI	Voltage	Finish	Options

ORDERING GUIDE:

SERIES

A12 = Aries 2 Series

SIZE

- XL2 = 2 3/4"W x 26"L x 4"D
- XL3 = 2 3/4"W x 38"L x 4"D
- XL4 = 2 3/4"W x 51"L x 4"D

MOUNTING OPTIONS

HM = Horizontal Mount

LED WATTAGE

- LED15 = 15 Watt LED
- LED30 = 30 Watt LED

COLOR TEMPERATURE (CCT)

- 3K = ±3000K Range
- 35K = ±3500K Range
- 4K = ±4000K Range
- 5K = ±5000K Range

COLOR RENDERING INDEX (CRI)

- 80CRI = 80 Color Rendering Index - STANDARD
- 90CRI = 90 Color Rendering Index

VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

FINISH

- BK = Black Finish
- BZ = Bronze Finish
- PNA = Painted Natural Aluminum
- SGR = Silver Gray
- WH = White Finish
- CC = Custom Color (Visit www.ralcolor.com)
— Provide RAL# or Make-to-Match Color Chip

DIMMING OPTIONS

Note: 0-10V 100%-30% is Standard

- D7A = 0-10VDC LED Dimming Driver (100-10%)
- D7B = 0-10VDC LED Dimming Driver (100-1%)

SHIELD OPTIONS

- CW = Center Window
- Color Options:
AM = Amber
BL = Blue
GN = Green
RD = Red
WH = WH
CC = Custom Color (Consult Factory)

MISC OPTIONS

FUS = Single Fusing

EMERGENCY / BATTERY OPTIONS ② ③ ④

No onsite Emergency Power (AC or DC) is provided

Meets California Energy Commission Title 20:
(CEC-400-2014-009-CMF) Efficiency Standards


- REL8W = Remote LED 8 Watt
- REL16W = Remote LED 16 Watt

ACCESSORY OPTIONS (order as a separate line)

9002 = Tamperproof Screwdriver

NOTES:

- ② Max WHIP length of the REL is 8 feet.
- ③ Final selection of the Battery Pack under discretion of Factory

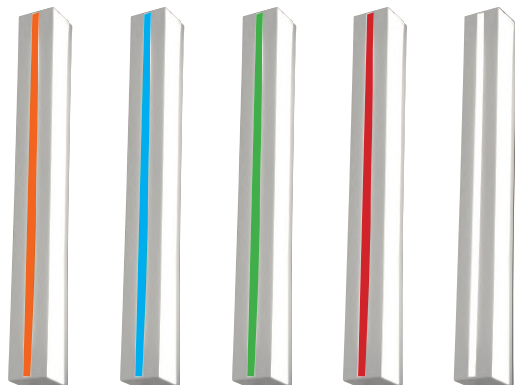

SIZE / LED WATTAGE			
Fixture Size	XL2	XL3	XL4
Dimensions - W x H x D	2 3/4" x 26" x 4"	2 3/4" x 38" x 4"	2 3/4" x 51" x 4"
Light Emitting Diode	LED	LED15	LED30
		LED30	LED30