

# GALILEO FAMILY—CR651 Series Rev1—Mercury Pendant

## SPECIFICATIONS:

- **BALLAST** — For Compact Fluorescent Electronic Cold Weather HPF is Standard. 120 or 277 Volt, Electronic (EB), Normal Power Factor (NPF) or High Power Factor (HPF) – Standard For HID. For MH Pulse Start is Standard.
- **CAGE** — Modular design using 3/8" or 1/2" Square extruded aluminum bars (SQB) permanently secured by hidden means to the frame.
- **DIFFUSER** — White translucent, standard Open top and bottom, non-yellowing 100% virgin acrylic, .125 Thick (1/8"). Optional Clear or Opaque top and/or bottom.
- **FINISH** — Corrosion and Weather resistant pre-treated extremely durable oven baked polyester powder coat
- **MOUNTING** — Pendant mount.
- **UL/ULC Listed** to U.S. and Canadian safety standards. Suitable for dry locations. Requires canopy for outdoor installation, damp location.

## STANDARD FEATURES INCLUDE:

- Painted finishes, including: black, bronze, white, custom color.
- Energy efficient Compact Fluorescent, H.I.D, Incandescent, LED or Induction lamp sources
- Glare-Free Translucent Diffuser (Standard)
- Electronic ballasts available (CFL and MH)

## MODELS FOR EVERY APPLICATION:

Architectural and Commercial — Office buildings, retail stores, hotels, banks, restaurants, bars & clubs, airports, train/bus terminals, parking facilities, arenas, shopping malls.

Institutional — Schools, universities, hospitals, museums, libraries, dormitories, police/fire/municipal buildings, recreational facilities.

Residential — Condominiums, apartments, homes.

ORDERING GUIDE:	SERIES	SIZE	LAMP TYPE/QTY/WATT	VOLTAGE/POWER FACTOR	FINISH	OPTIONS
	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

### SERIES

ME = Custom Mercury Series

### SIZE

XL1 = 24" Long x 13" Dia.

### LAMP TYPE/QTY/WATTAGE

LED60 = 60 Watt LED

### COLOR TEMP

4K = 4000K range LED

### VOLTAGE/POWER FACTOR

EBU = Universal Volt  
(120-277v) Electronic Ballast

### PAINTED FINISH

BZ = Bronze Finish




### OPTIONS

ST24 = 24 Inches Stem

ST32 = 32 Inches Stem

ST40 = 40 Inches Stem

CR651 = Cluster Pendant - 3 Fixtures on various stem lengths (see illustration)

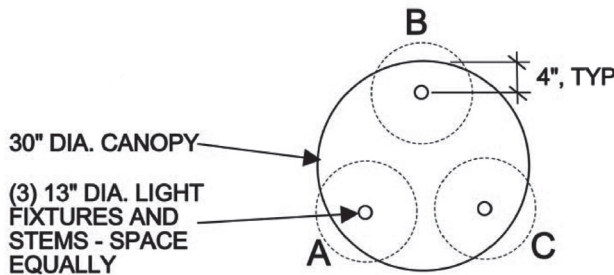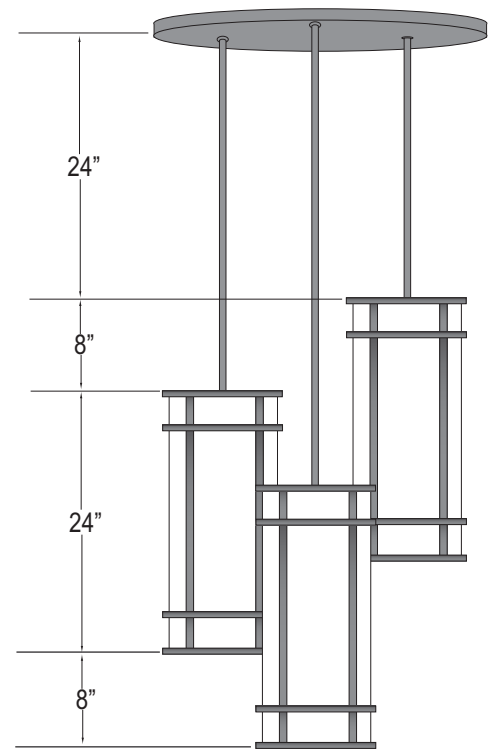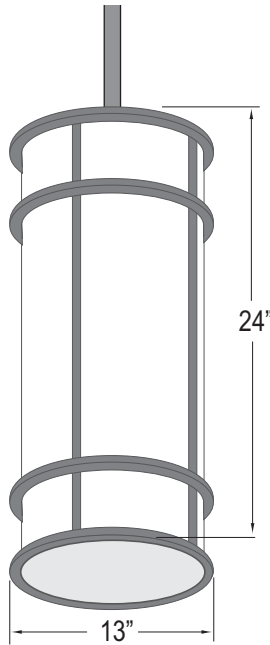

## REFLECTED CANOPY PLAN

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION	IOWA CLINIC	
APPROVED BY		

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured and without notice. This literature depicts a product DESIGN that is the SOLE and EXCLUSIVE PROPERTY of ECLIPSE LIGHTING, INC.—An Illinois Corporation. In compliance with U.S. COPYRIGHT and PATENT requirements, notification is hereby presented in this form that this literature, or the product it depicts, is NOT to be copied, altered or used in any manner without the express written consent of, or contrary to the best interests of, ECLIPSE LIGHTING, INC. ---05/04/1994