We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

Galileo RGBTW Basic Series

Modern Elegant Wall Sconce

RGB Color/White Tunable LED — Casambi App Control

SPECIFICATIONS

- BACKPLATE — 16 Ga. aluminum (AL).
- CAGE — Square extruded aluminum bars permanently secured by hidden means to the frame.
- DIFFUSER — White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8″).
- DRIVER — Universal voltage input, 120/277V electronic driver.
- FASTENERS — Stainless steel tamperproof screws —(2) To secure cage/frame in place.
- FINISH — Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
- GASKETING — High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.
- LIGHT ENGINE — RGB Color/White Tunable LED Linear Light Engines.
- MOUNTING — Use (4) or (6) 5/16″ diameter holes for 1/4″ diameter bolts for outdoor or indoor. 7/8″ KO in Center for Wire Access.
- SOFTWARE — Bluetooth® Low Energy (BLE) Connected Casambi App (Android / iOS).
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations. ADA Compliant.
- WARRANTY — 5-Year Limited Warranty.



Xenia (XN) Cage Style

ORDERING INFO

ORDERING GUIDE:

Series	Size	Voltage	Finish	Options

SERIES

Note: Refer to Cage Styles on Pg.2 for Style Code

RW-BSC-xx = Galileo RGBTW Basic Series
— xx = Style Code
— Order Example: ***RW-BSC-XN***

SIZE

XL = 16″ Tall x 8.25″ Width x 5.5″ Depth
XL1 = 21″ Tall x 9.25″ Width x 5.5″ Depth
XL2 = 26.25″ Tall x 12.25″ Width x 7.25″ Depth

VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

STANDARD FINISH

BK = Black Finish
BZ = Bronze Finish
PNA = Painted Natural Aluminum
SGR = Silver Gray
WH = Textured White Finish

PREMIUM UPCHARGE FINISH

CC = Custom Color (Visit **www.ralcolor.com**)
— Provide RAL# or Make-to-Match Color Chip
+NAT = Epoxy Coating for Natatorium
— Includes Conformal Coating of LEDs

CAGE / DIFFUSER OPTIONS

ATS = Aluminum Top Shield (No Up Light)
ABS = Aluminum Bottom Shield (No Bottom Light)
ATBS = Aluminum Top & Bottom Shield (No Up or Down Light)
CB = Clear Bottom
CT = Clear Top
CTB = Clear Top & Bottom (Standard with Up/Down Light)
OB = Open Bottom (indoor only)
OQT = Opaque Top (No Up Light)
OQB = Opaque Bottom (No Down Light)
OQTB = Opaque Top & Bottom (No Up or Down Light)

MISC OPTIONS

WRE = Wireless Range Extender
— For Use with Casambi Wireless Mesh
— Max 1200ft (365m) Range
— Operating Temp: -30°C to 70°C | -22°F to 158°F
— Built-in Surge Protection: 20KV/10KA
— NEMA 4 Enclosure for Outdoor Use

WATTAGES

SIZE	XL	XL1	XL2
RED	*11W*	*14W*	*17W*
GREEN	*11W*	*14W*	*17W*
BLUE	*11W*	*14W*	*17W*
COOL WHITE	*12W*	*15W*	*18W*
WARM WHITE	*12W*	*15W*	*18W*

NOTE: Wattages shown are nominal.



Wireless Range Extender (WRE) Option

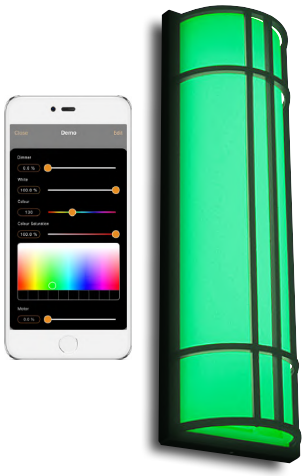
- **For Use with Casambi Wireless Mesh**
- **Max 1200ft (365m) Range**
- **Operating Temp: -30°C to 70°C | -22°F to 158°F**
- **Built-in Surge Protection: 20KV/10KA**
- **NEMA 4 Enclosure for Outdoor Use**

Note: *Wireless range is highly dependent on the integration of fixtures, surrounding environment, and other conditions. It is recommended to conduct testing for range accuracy.*

WI-FI COLOR TUNING APP



Jupiter (JU)



Mercury (ME)

© 2026 Eclipse Lighting Inc.

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

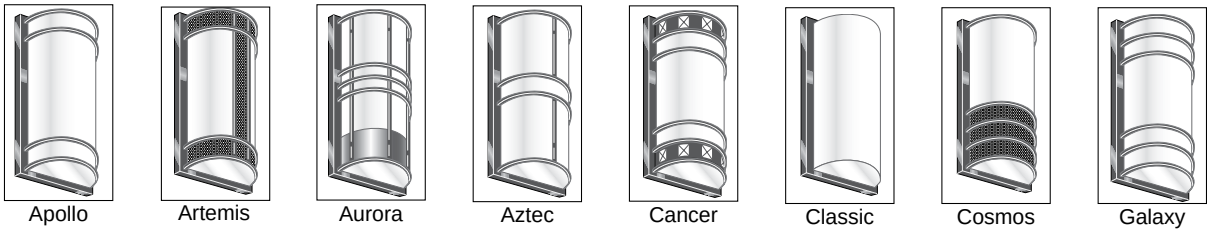
Galileo RGBTW Basic Series

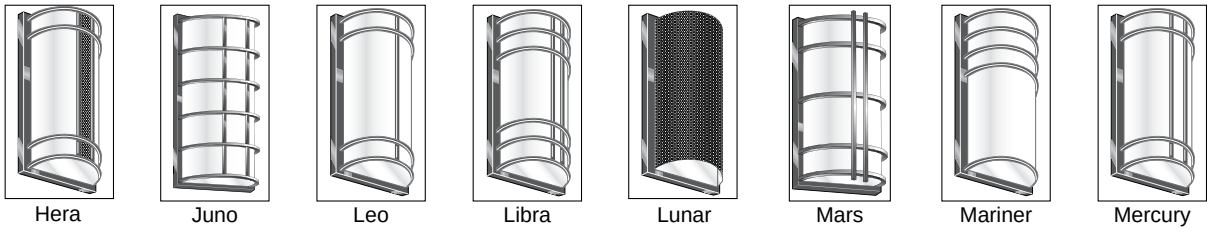
Modern Elegant Wall Sconce

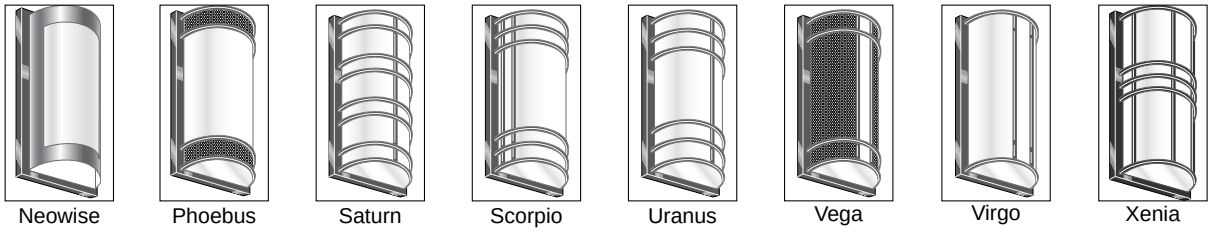
RGB Color/White Tunable LED — Casambi App Control

ROUND	
Apollo	BSC-ADA-AP
Artemis	BSC-ADA-AT
Aurora	BSC-ADA-AU
Aztec	BSC-ADA-AZ
Cancer	BSC-ADA-CA
Classic	BSC-ADA-CL
Cosmos	BSC-ADA-CS
Galaxy	BSC-ADA-GA
Hera	BSC-ADA-HR
Juno	BSC-ADA-JN
Leo	BSC-ADA-LE
Libra	BSC-ADA-LI
Lunar	BSC-ADA-LU
Mars	BSC-ADA-MAR
Mariner	BSC-ADA-MR
Mercury	BSC-ADA-ME
Neowise	BSC-ADA-NEO
Phoebus	BSC-ADA-PH
Saturn	BSC-ADA-ST
Scorpio	BSC-ADA-SP
Uranus	BSC-ADA-UR
Vega	BSC-ADA-VA
Virgo	BSC-ADA-VG
Xenia	BSC-ADA-XN
SQUARE	
Equinox	BSC-ADA-EQ
Gemini	BSC-ADA-GE
Jupiter	BSC-ADA-JU
Neptune	BSC-ADA-NE
Orion	BSC-ADA-ON
Solar	BSC-ADA-SO
Voyager	BSC-ADA-VY
Zeus	BSC-ADA-ZE
TRIANGLE	
Pisces	BSC-ADA-PI
Pisces 2	BSC-ADA-PI2
Quasar	BSC-ADA-QU
Sagittarius	BSC-ADA-SG
Thor	BSC-ADA-TH
Triton	BSC-ADA-TR
Viking	BSC-ADA-VK

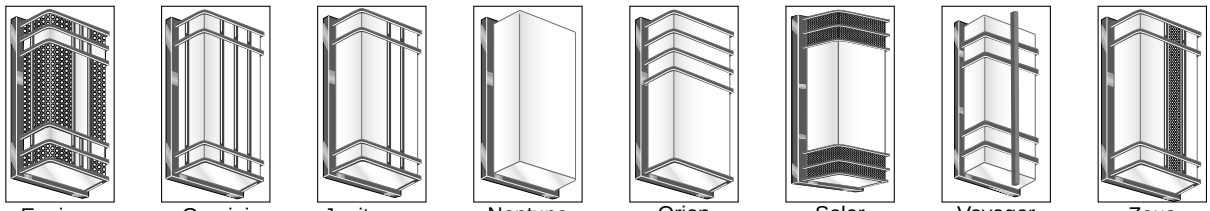
ROUND DIFFUSER


Apollo, Artemis, Aurora, Aztec, Cancer, Classic, Cosmos, Galaxy

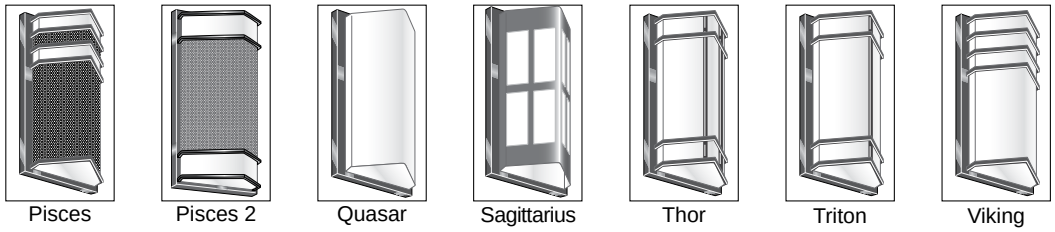

Hera, Juno, Leo, Libra, Lunar, Mars, Mariner, Mercury


Neowise, Phoebus, Saturn, Scorpio, Uranus, Vega, Virgo, Xenia

SQUARE DIFFUSER


Equinox, Gemini, Jupiter, Neptune, Orion, Solar, Voyager, Zeus

TRIANGULAR DIFFUSER


Pisces, Pisces 2, Quasar, Sagittarius, Thor, Triton, Viking



35K

The **RGBTW Galileo Basic Series** features color tuning light engines which can be controlled via the **Bluetooth® Low Energy (BLE) Connected Casambi App (Android / iOS)**. Various modes allow the user to adjust the LED color hue with up to 16 million color combinations or they can be fine tuned to a more conventional color temperature ranging from warm white (2700K) to a cool white (6000K) CCT.

The ability to customize your lighting gives the user the flexibility to personalize their illumination scheme according to their desired configuration which is applicable for holidays, themed events, location specific environments, and many other applications.

ECLIPSE™ LIGHTING

2925 Lucy Lane | Franklin Park, IL 60131
P: 847-260-0336 I F:847-260-0344 | E: quotes@eclipselightinginc.com | W: eclipselightinginc.com

© 2026 Eclipse Lighting Inc.