

# LEGACY 2

**High Abuse Wall Sconce**  
**Selectable Wattage / CCT**  
**ADA Compliant / IP66 Wet Location**

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver.
- FINISH — Corrosion Resistant Polyester Powder Coated Finish.
- HOUSING — Formed Aluminum Housing. Die-cast wall mount plate.
- LENS — Anti-Yellowing and High Transmission Polycarbonate Diffuser.
- LIGHT ENGINE — Energy Efficient LED - Selectable Wattage / CCT.  
 (Wattages: 18W, 20W or 22W / CCT: 3000K, 4000K or 5000K)
- LED LIFETIME — ≥50,000hrs.
- MOUNTING — Mounts to standard 3" and 4" recessed junction boxes via mounting strap. Can also be 4-point mounted via supplied mounting screws.
- OPERATING AMBIENT TEMPERATURE — -20°C to +40°C (-4°F to 122°F)
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. RoHS and ADA Compliant. Made in USA. IP66 Rated, suitable for wet location.
- WARRANTY — 5-Year Limited Warranty.



**Rectangular Windows (RW)**



**Front Facing Perfix Window (PX)**



**Solid Front (No Window) (SF)**

## ORDERING INFO

Series	Window	Size	Wattage	CCT	Voltage	Finish	Options
<b>LGC2</b>		<b>L</b>			<b>UNV</b>		

### SERIES

LGC2 = Legacy 2 Series

### WINDOW STYLE

- RW = Rectangular Windows
- PX = Front Facing Perfix Window
- SF = Solid Front (No Window)

### SIZE

L = Large: 5" Width x 14" Height x 4" Depth

### WATTAGE

Refer to Below Chart for Wattage / Lumen Output  
 SLED = \*Selectable LED Wattages: 18W | 20W | 22W

### COLOR TEMPERATURE

SCCT = \*Selectable CCT: 3000K | 4000K | 5000K

*\*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.*

### VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

### STANDARD FINISH

- BK = Black Finish
- BZ = Bronze Finish
- PNA = Painted Natural Aluminum Finish
- TW = Textured White Finish

### PREMIUM UPCHARGE FINISH

CC = Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))  
 — Provide RAL# or Make-to-Match Color Chip

### PHOTOCELL OPTION

PHOT = Photocell

### MISC OPTIONS

TP = Torx Tamperproof Screws

Wattage / Lumen Output			
Setting	Low Power	Medium Power	High Power
Large	18 Watt (2160 Lumens)	20 Watt (2400 Lumens)	22 Watt (2640 Lumens)

# LEGACY 2

*High Abuse Wall Sconce*


*Selectable Wattage / CCT*

*ADA Compliant / IP66 Wet Location*


We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## DIMENSIONS

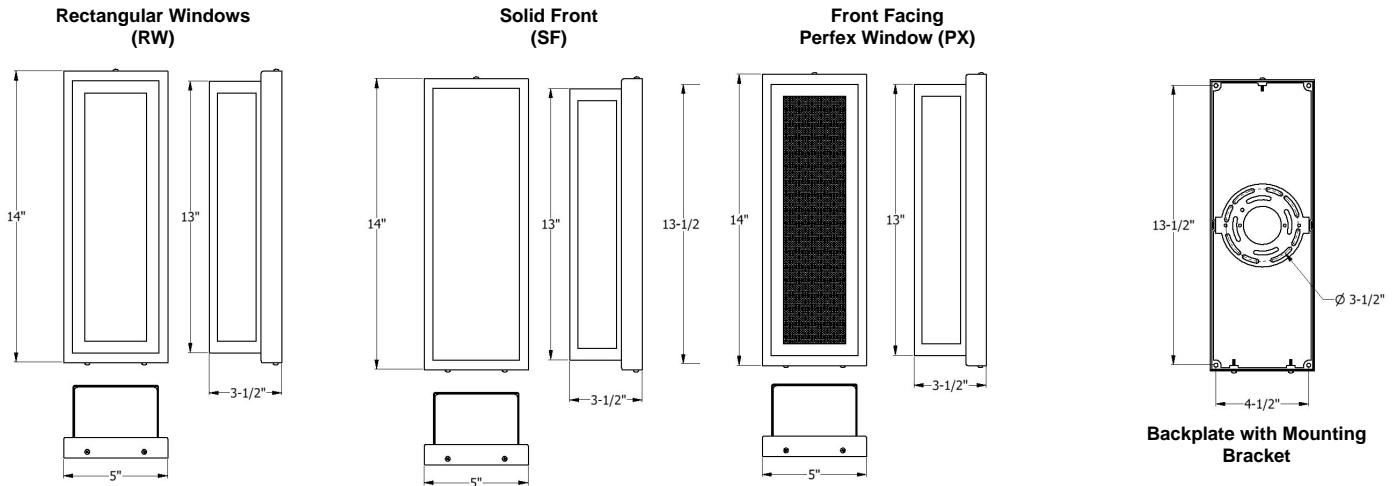

## SELECTABLE WATTAGE / CCT

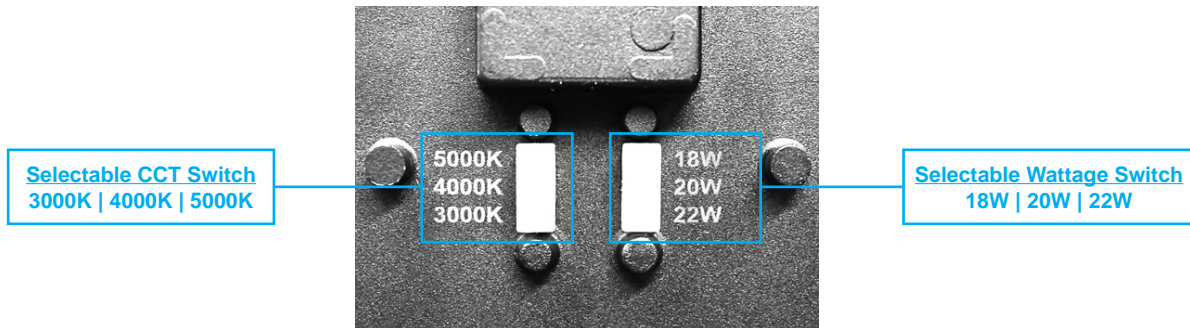

**Selectable Wattage / CCT Switches**  
 Located on Back of Fixture

## APPLICATIONS



- Applications**
- Apartments
  - Condominiums
  - Affordable Housing
  - Dormitories
  - Hospitality
  - Senior Housing
  - Assisted Living
  - Public Storage
  - Military