

Voyager Series


Galileo Wall Sconce Flat Bands / Vertical Bar

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal Voltage 120/277 Volt Electronic Driver is standard for LED.
- BACKPLATE — 16 Ga. aluminum (AL).
- BACKBOX — 16 Ga. aluminum (AL) with wire access on four sides and back through 7/8" diameter knockouts flattened water tight (Optional for surface conduit entry or standard with emergency battery).
- DIFFUSER — White translucent, non-yellowing 100% virgin acrylic, .125 Thick (1/8"). Optional Clear or Opaque top and/or bottom.
- CAGE — Modular design using 1-1/4" wide Flat aluminum bands (FB) & 1/2" Square extruded aluminum bar (SQB) center mount, extending beyond length of sconce — permanently secured by hidden means to the frame. Standard configurations shown. Custom spacing is available.
- FINISH — Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
- GASKETING — High temperature, non-aging black EPDM and/or neoprene rubber around the entire lens perimeter and rear wire entrance hole to protect against dust, moisture and outside contaminants.
- FASTENERS — Stainless steel tamperproof screws —(2) To secure lens in place.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED).
- MOUNTING — Use (4) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor (no center access hole for J-Box mount). Must derate lamping for horizontal.
- SHIELD — Optional Solid Aluminum Opaque Shield. Consult Factory about possible lamp/ wattage limitations. Specify Finish if choosing SHLD.
- PERFEX — Optional Perforated Aluminum Panel Insert with 1/16" diameter holes (23% open). Specify Finish if choosing PX.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards - Suitable for wet locations.

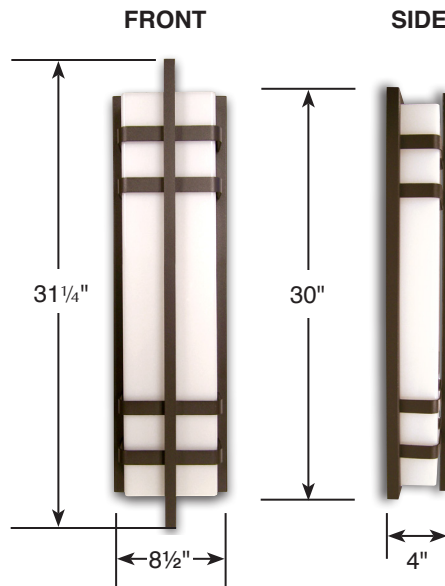

Voyager Round

ORDERING GUIDE:	Series	Shape	Size	Lamp/Wattage	Voltage	Finish	Options

SERIES

VY = Voyager Series

SHAPE

R = Round
SQ = Square

SIZE

30 = 30" Tall (31 1/4" Center Bar) x 8 1/2" Width x 4" Depth

LED WATTAGE

LED20 = 20 Watt LED
LED25 = 25 Watt LED
LED30 = 30 Watt LED

LED COLOR TEMPERATURE

3K = ±3000K range LED
4K = ±4000K range LED
5K = ±5000K range LED

VOLTAGE

120 = 120 Volts
277 = 277 Volts
EBU = Universal Volt (120-277v) Electronic Driver

STANDARD PAINTED FINISH

BK = Black Finish
BZ = Bronze Finish — Standard
PNA = Painted Natural Aluminum
SGR = Silver Gray
WH = White Finish
CC = Custom Color (Consult Factory)

OPTIONS

9002 = Tamperproof Screw Drivers
BB = Back Box for EL or Surface Conduit: 2" Depth (Removes ADA Compliance)
CTB = Clear Top & Bottom (Standard with Up/Downlight)
FUS = Single Fusing
DFUS = Double Fusing
GV = Gravura Custom Engraving (Consult Factory)
ONTB = Open Top & Bottom (indoor only)
OQTB = Opaque Top & Bottom
PX = Alum. Perforated Insert with 1/16" dia. holes (Must Specify Finish)
SHLD = Solid Aluminum Shield (Specify Finish)

EMERGENCY OPTIONS 3 5 55

No onsite Emergency Power (AC or DC) is provided
Specify Fixture Voltage: 120V or 277V Power Feed
A=120V or B=277V

*Consult Factory for Emergency Options