

# PG9

## Parking Garage Canopy 9" Luminaire

### DLC / IP65 Compliant

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

#### SPECIFICATIONS

- COLOR RENDERING INDEX — >70 CRI.
- DIFFUSER — Polycarbonate Shock-Proof Diffuser with refracted pattern and UV inhibitors.
- DIMENSIONS — 8.86" Square / 5.31" Depth
- DRIVER — Universal Voltage (120~277V) electronic driver with 0-10V dimming is standard.
- EFFICACY — 120 Lumens per Watt.
- FINISH — Die Cast aluminum housing finished in Bronze.
- HOUSING — Die cast aluminum alloy housing. Fully sealed to prevent dirt & insect contamination.
- LIFE SPAN — >50,000 Hrs Duty Cycle
- MOUNTING — Three ¼ mounting hole and additional one on top for mounting to recessed outlet box or wall surface. Installation bracket with screws are included.
- OPERATING/STORAGE TEMP — -30°C~+50°C / -40°C~+60°C.
- POWER FACTOR — 0.98@120VAC / 0.90@277VAC.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards. Suitable for Wet Locations. c/UL and DLC Listed. IP65 Tested and Approved.
- WARRANTY — 5 Year Limited Warranty.



#### ORDERING INFO

Series	LED Wattage	CCT	Voltage	Finish	Options

#### ORDERING GUIDE:

#### SERIES

PG9 = Parking Garage Canopy 9" Luminaire

#### LED WATTAGE

LED40 = 40 Watt LED (4800 Lumens)

LED60 = 60 Watt LED (7200 Lumens)

#### LED COLOR TEMPERATURE (CCT)

3K = ±3000K range

4K = ±4000K range

5K = ±5000K range

57K = ±5700K range

#### VOLTAGE

347 = 347 Volt

480 = 480 Volt

UNV = Universal Volt (120-277v) Driver

#### FINISH

BZ = Bronze Finish

+NAT = Conformal Coating - Light Engine Only

#### MOUNTING OPTIONS

PEND = Pendant Mount — Standard 12" Stem

~For Other Stem Lengths, Consult Factory

#### Choose Pendant Canopy Style:

SWC-R = Swivel Canopy for 4" Round J-Box

SWC-RR = Swivel Canopy for 4" Round J-Box

— Rapid Mount with Hinged Door

SWC-S = Swivel Canopy for 4" Square J-Box

SWC-SR = Swivel Canopy for 4" Square J-Box

— Rapid Mount with Hinged Door

**Note: See Page 2 for Images/Examples**

TMB = Trunnion Mount Bracket

— Extends to 24" (Customer Request)

#### CONTROL OPTIONS

**Note: See Accessory Options for Required Remote Controller**

9328 = Photocell Button (120/277V)

OCC = Occupancy Sensing | Motion Sensor Integral<sup>20</sup>

— Microwave / Single Feed / 120/277V Only

— Standby Dim Level Presets: ON/OFF (0%/100%)

BLD = Bi-Level Dimming | Motion Sensor Integral<sup>20</sup>

— Microwave / Single Feed / 120/277V Only

— Standby Dim Level Presets:

10% / 20% / 30% (Standard) / 50%

BLD/AMB = Bi-Level Dimming | Motion Sensor Integral<sup>20</sup>

— Ambient Light Sensing Feature (AMB)

— Microwave / Single Feed / 120/277V Only

— Standby Dim Level Presets:

10% / 20% / 30% (Standard) / 50%

— Bi-Level Control Initiated at AMB Light Level Preset

#### EMERGENCY / BATTERY OPTIONS

**Meets California Energy Commission Title 20:**

(CEC-400-2014-009-CMF) Efficiency Standards

REL4W = Remote LED 4 Watt

REL8W = Remote LED 8 Watt

REL16W = Remote LED 16 Watt

#### ACCESSORY OPTIONS (order as a separate line)

REMT = Remote Controller for Sensor Options

#### NOTES:


<sup>3</sup> Consult Factory for additional Emergency options not shown

<sup>20</sup> Max mounting height of fixture is 18' (18 feet)

<sup>50</sup> Max WHIP length of the REL is 8 feet.

<sup>53</sup> Final selection of the Battery Pack under discretion of Factory

#### DIMENSIONS

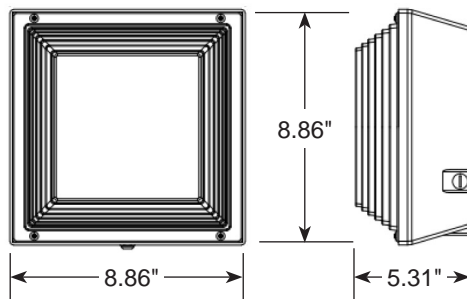

PENDANT SWIVEL CANOPY TYPES

---




**Swivel Canopy 4" for  
Round/Octagonal J-BOX (SWC-R)**



**Swivel Canopy 4" for  
Square J-BOX (SWC-S)**






**Swivel Canopy 4" for  
Round/Octagonal J-BOX  
Rapid Mount with Hinged Door  
(SWC-RR)**



**Swivel Canopy 4" for  
Square J-BOX  
Rapid Mount with Hinged Door  
(SWC-SR)**

PHOTOMETRIC DATA

TEST #: PG940W3KUNV   CATALOGUE #: PG9-LED40-3K-UNV   TEST DATE: 3/1/2018						
Lamp Output	Lumen Efficacy	Input Voltage	Input Wattage	Color Temp	BUG Rating	Test Date
4529.4 Lumens	117.85 LPW	120.0V	38.432W	3000K	B2-U3-G1	3/1/2018

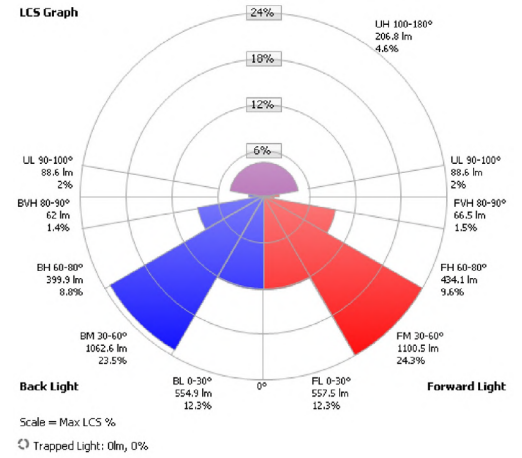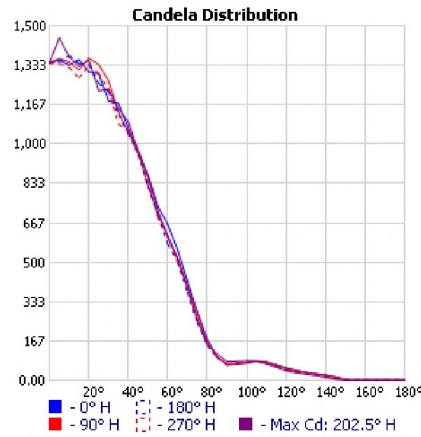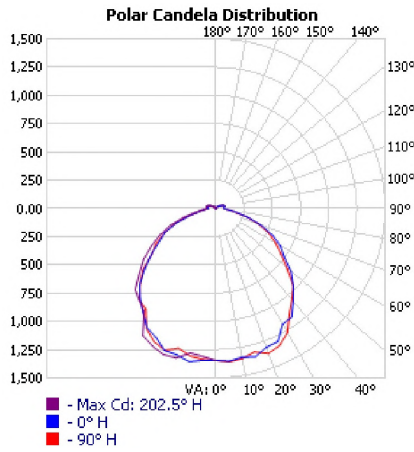

TEST #: PG960W3KUNV   CATALOGUE #: PG9-LED60-3K-UNV   TEST DATE: 3/1/2018						
Lamp Output	Lumen Efficacy	Input Voltage	Input Wattage	Color Temp	BUG Rating	Test Date
6554.8 Lumens	113.69 LPW	120.0V	57.656W	3000K	B2-U3-G2	3/1/2018

