

# UC

## Under Cabinet Mounted LED Series

We reserve the right to revise the design or components of any product without notice.


CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

### SPECIFICATIONS

- DRIVER— 120V Input. 12W LED Driver for 12"-24" Models, 25W LED Driver for 36"-48" Models. UL Class 2 Power Supply.
- HARDWARE — Included Hardware: (2) Mounting Screws, (3) Wire Nuts, (1) Die Cast Coupler.
- HOUSING — Die-formed cold rolled steel construction.
- FINISH — Premium White Powder Coat.
- LENS — High Diffused Plastic Lens - Even Light Distribution.
- LIGHT ENGINE — Energy Efficient LED rated for 50,000 hrs.
- WIRING — 120V Convertible direct wire input. Knockouts available for other input configurations.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards.



### DIMENSIONS

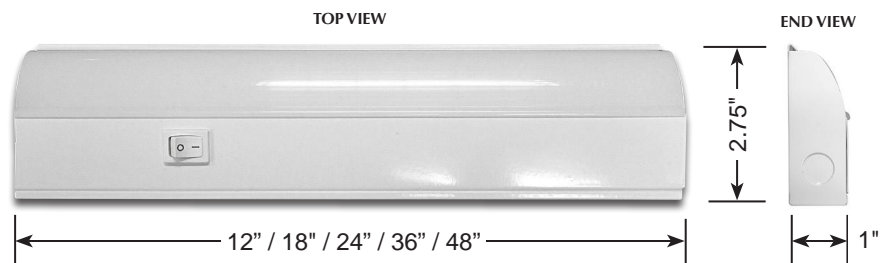

UC ORDER GUIDE						
SERIES	DIMENSIONS	WATTAGE	TOTAL LUMENS	EFFICACY	COLOR TEMP	CRI
UC12	12"L x 2.75"W x 1"D	7W	450	64 lm/W	3000K	>80
UC18	18"L x 2.75"W x 1"D	10W	675	68 lm/W	3000k	>80
UC24	24"L x 2.75"W x 1"D	12W	900	75 lm/W	3000k	>80
UC36	36"L x 2.75"W x 1"D	18.5W	1350	73 lm/W	3000k	>80
UC48	48"L x 2.75"W x 1"D	23.5W	1800	77 lm/W	3000k	>80