

GC10 / GC14 Series

LED Canopy Luminaire
Selectable LED Wattages / CCT
IP66 Rated / Waterproof

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- **MINIMUM ORDER QUANTITY** — MOQ of 500 pieces.
- **DRIVER** — Universal Voltage 120/277v Electronic Driver with 0-10V dimming and 2kV/4kV surge protection.
- **DIFFUSER** — Polycarbonate diffuser with Gas Station / Parking Garage LED distribution types.
- **HOUSING** — Solid die-cast aluminum housing construction.
- **FINISH** — UV stabilized powder coated finish.
- **LIGHT ENGINES** — Energy Efficient Light Emitting Diode (LED). +50,000hr Lifespan. >80CRI.
- **MOUNTING** — Standard quick mount bracket mounts directly to ceiling. Optional 3/4" pendant mount (PEND) option or Rapid Mount Box (RMB) option are available.
- **COMPLIANCE** — Built to comply with U.S. and Canadian safety standards. Suitable for Wet Locations. IP66 Rated.
- **Warranty** — 5-Year Limited Warranty.



ORDERING INFO

Series	Distribution	LED Wattage	CCT	Voltage	Finish	Options

ORDERING GUIDE:

SERIES

Note: GC10/GC14 has a Minimum Order Qty of 500pcs
GC10 = GC10 — 10" Square Canopy Series
GC14 = GC14 — 14" Square Canopy Series

DISTRIBUTION TYPE

GS = Gas Station
PG = Parking Garage

LED WATTAGE

Refer to Below Chart for Wattage / Lumen Output
SLED = Selectable LED Wattages
 — GC10: 30W | 40W | 60W
 — GC14: 80W | 100W | 120W

LED COLOR TEMPERATURE (CCT)

SCCT = Selectable CCT: 3000K | 4000K | 5000K

DRIVER VOLTAGE

UNV = Universal Voltage (120/277v) Electronic Driver

FINISH

BZ = Bronze Finish
BK = Black Finish
WH = White Finish

MOUNTING OPTIONS

PEND = Pendant Mount
 -3/4" IPS Conduit Stem (12" is Standard)
 -For Other Stem Lengths (Consult Factory)
Choose Pendant Canopy Style:
SWC-R = Swivel Canopy for 4" Round J-BOX
SWC-RR = Swivel Canopy for 4" Round J-BOX
 — Rapid Mount with Hinged Door
SWC-S = Swivel Canopy for 4" Square J-BOX
SWC-SR = Swivel Canopy for 4" Square J-BOX
 — Rapid Mount with Hinged Door
 Note: See Page 3 for Images/Examples
RMB = Rapid Mount Box (Includes Hub / 1" Stem)

CONTROL OPTIONS

Note: See Accessory Options for Required Remote Controller
9328 = Photocell Button (120/277V)
9328P = Photocell Pencil (120/277V)
BLDA = Bi-Level Dimming | Motion Sensor Integral
 — Ambient Light Sensing Feature (AMB)
 — Microwave / Single Feed / 120/277V Only
 — Standby Dim Level Presets:
 10% / 20% / 30% (Standard) / 50%
 — Bi-Level Control Initiated at AMB Light Level Preset
 — For External Sensor Version, Choose **BLDA-E**

EMERGENCY / BATTERY OPTIONS

No onsite Emergency Power (AC or DC) is provided

Meets California Energy Commission Title 20:


(CEC-400-2014-009-CMF) Efficiency Standards
REL8W = Remote LED 8 Watt
REL15W = Remote LED 15 Watt

ACCESSORY OPTIONS (order as a separate line)


REMT = Remote Controller for Sensor Options

SELECTABLE LED WATTAGE / LUMENS						
Series / Dimensions	GC10 Series / 10.23" Square x 3.4" Depth			GC14 Series / 13.58" Square x 4.27" Depth		
Selectable LED Wattage	30W	40W	60W	80W	100W	120W
Lumens	3900 Lumens	5200 Lumens	7800 Lumens	11,500 Lumens	13,000 Lumens	16,000 Lumens

DIMENSIONS

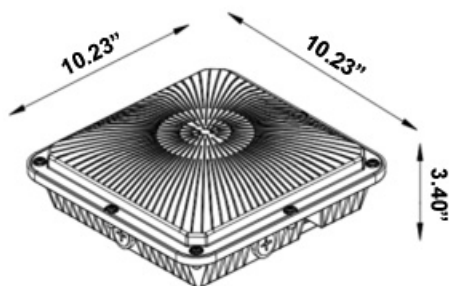


GC10 Series

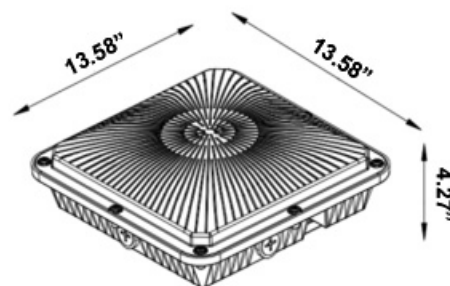


GC14 Series

DISTRIBUTION TYPES

Gas Station (GS)

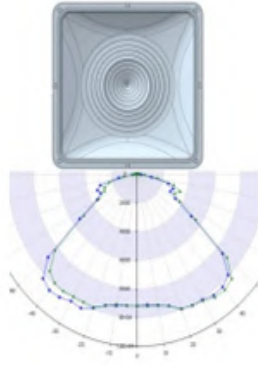

Parking Garage (PG)

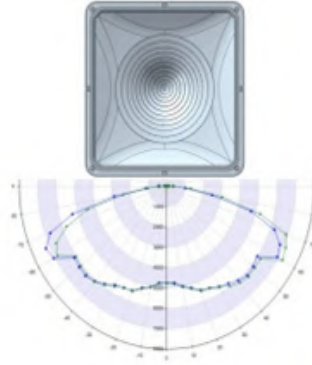


OPTIONS



Photocell Button (9328)



Photocell Pencil (9328P)

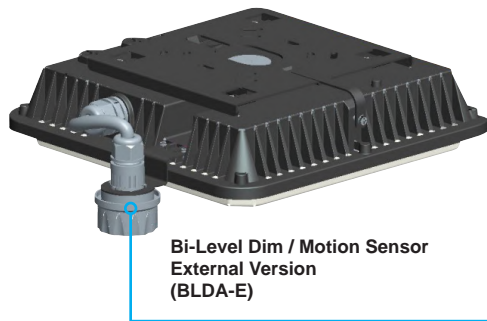

Bi-Level Dim / Motion Sensor
External Version
(BLDA-E)



Remote Controller
for External Sensor



Bi-Level Dim / Motion Sensor
Integral Version
(BLDA)



Remote Controller
for Integral Sensor



Remote Emergency Battery
8 Watt (REL8W) or 15 Watt (REL15W)

PENDANT SWIVEL CANOPY TYPES




**Swivel Canopy 4" for
Round/Octagonal J-BOX (SWC-R)**



**Swivel Canopy 4" for
Square J-BOX (SWC-S)**



**Swivel Canopy 4" for
Round/Octagonal J-BOX
Rapid Mount with Hinged Door
(SWC-RR)**



**Swivel Canopy 4" for
Square J-BOX
Rapid Mount with Hinged Door
(SWC-SR)**