

We reserve the right to revise the design or components of any product without notice.

GR20

Garage Round 20" Diameter Luminaire
Selectable LED Wattage / CCT
RoHS Compliant / Wet Location

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal Voltage (120~277V) electronic driver.
- HOUSING — Die cast aluminum housing.
- LENS — Translucent optical lens for even light distribution and reduced glare.
- LIFE SPAN — >50,000 Hours.
- LIGHT OPTICS — Type 5 Concentrated, Type 5 Wide, and Type 5 Rectangular.
- LIGHT ENGINE — Energy Efficient LED - Selectable Wattage / CCT (80CRI).
- MOUNTING — Quick mount plate directly mounts to J-BOX in ceiling.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards.
RoHS Compliant. ETL(UL1598), CSA(C22.2 No. 250.0), DLC 5.1 Premium Listed (Pending). Buy American Act Compliant. Suitable for Wet Locations.
- WARRANTY — 5 Year Limited Warranty.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth® SIG, Inc.

ORDERING INFO

Series	Mounting	Wattage	CCT	Distribution	Voltage	Finish	Options

ORDERING GUIDE:

SERIES

GR20 = Garage Round 20" Dia. - Selectable Wattage / CCT

MOUNTING

- CM** = Ceiling Mount (Quick Mount Plate to J-BOX)
- PEND** = Pendant Mount (for 3/4" NPT Stem)
— Stem by Others
- TRUN** = Trunnion Mount

WATTAGE

- SLED-L** = *Selectable LED - Low: 40W | 60W | 80W
- SLED-H** = *Selectable LED - High: 100W | 120W | 150W

COLOR TEMPERATURE (CCT)

SCCT = *Selectable CCT: 3000K | 4000K | 5000K

*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

DISTRIBUTION TYPE

- 5C** = Type 5 Concentrated
- 5W** = Type 5 Wide
- 5R** = Type 5 Rectangular

VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

STANDARD FINISH

- BK** = Black Finish
- BZ** = Bronze Finish
- PNA** = Painted Natural Aluminum Finish
- WH** = White Finish

OPTIONS

- BD** = Bird Dome
- HSS** = House Side Shield
- UPL** = Uplight (800 Lumens)
- WG** = Wire Guard

SENSOR OPTIONS

- OCC** = Occupancy Sensing | Motion Sensor Integral
— Plug-and-Play Installation
- OCC-B** = Occupancy Motion - Bluetooth® Enabled Sensor
— Plug-and-Play Installation

TELLELIGHT WIRELESS CONTROL SYSTEM


- Certified Bluetooth® Mesh Components & Topology**
- Standard Fixture Options:** (Question? Consult Factory Rep)
- TSC3** = Internal Fixture Controller w/External Antennae Cover
— TSC3 Requires Sensor
- TSS14** = Internal PIR Low Bay Sensor w/External Lens

EMERGENCY BATTERY OPTIONS

- EL** = Integral Emergency Battery (90min)

Power Setting	Low	Medium	High
SLED-L	40W (5,200 Lumens)	60W (7,800 Lumens)	80W (10,400 Lumens)
SLED-H	100W (13,400 Lumens)	120W (15,600 Lumens)	150W (19,500 Lumens)

DIMENSIONS

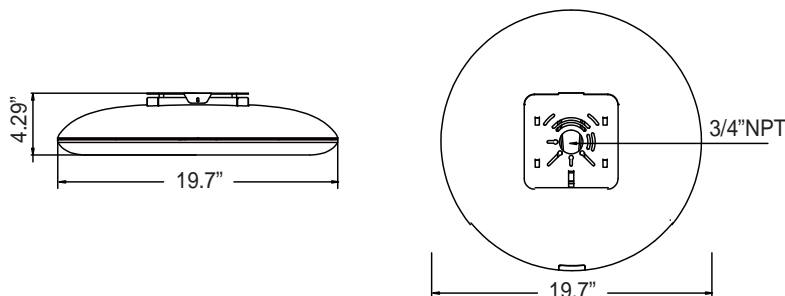


GR20

Garage Round 20" Diameter Luminaire
Selectable LED Wattage / CCT
RoHS Compliant / Wet Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

FEATURES

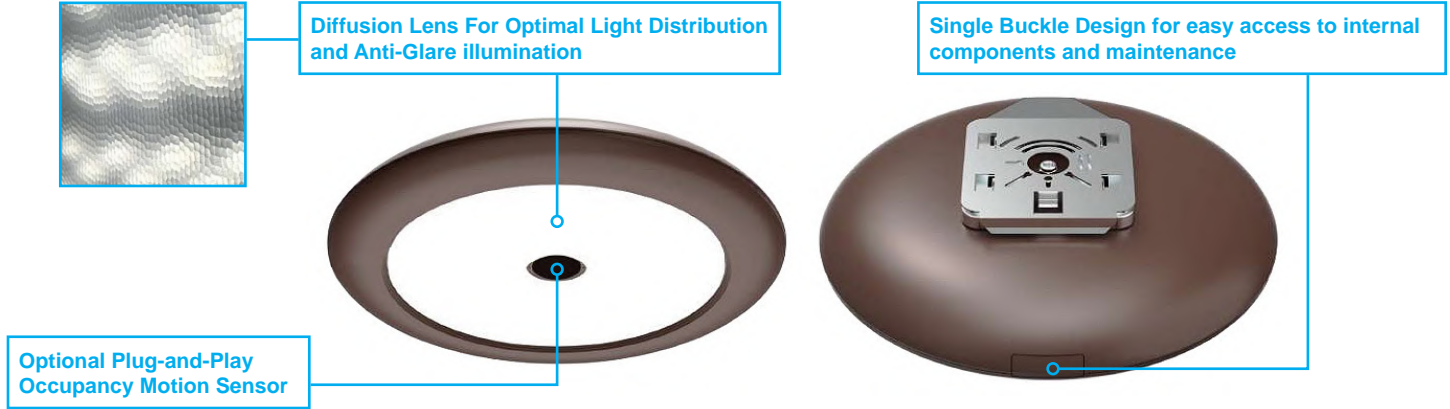

MOUNTING



OPTIONS




GR20

Garage Round 20" Diameter Luminaire
Selectable LED Wattage / CCT
RoHS Compliant / Wet Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

DISTRIBUTION TYPES

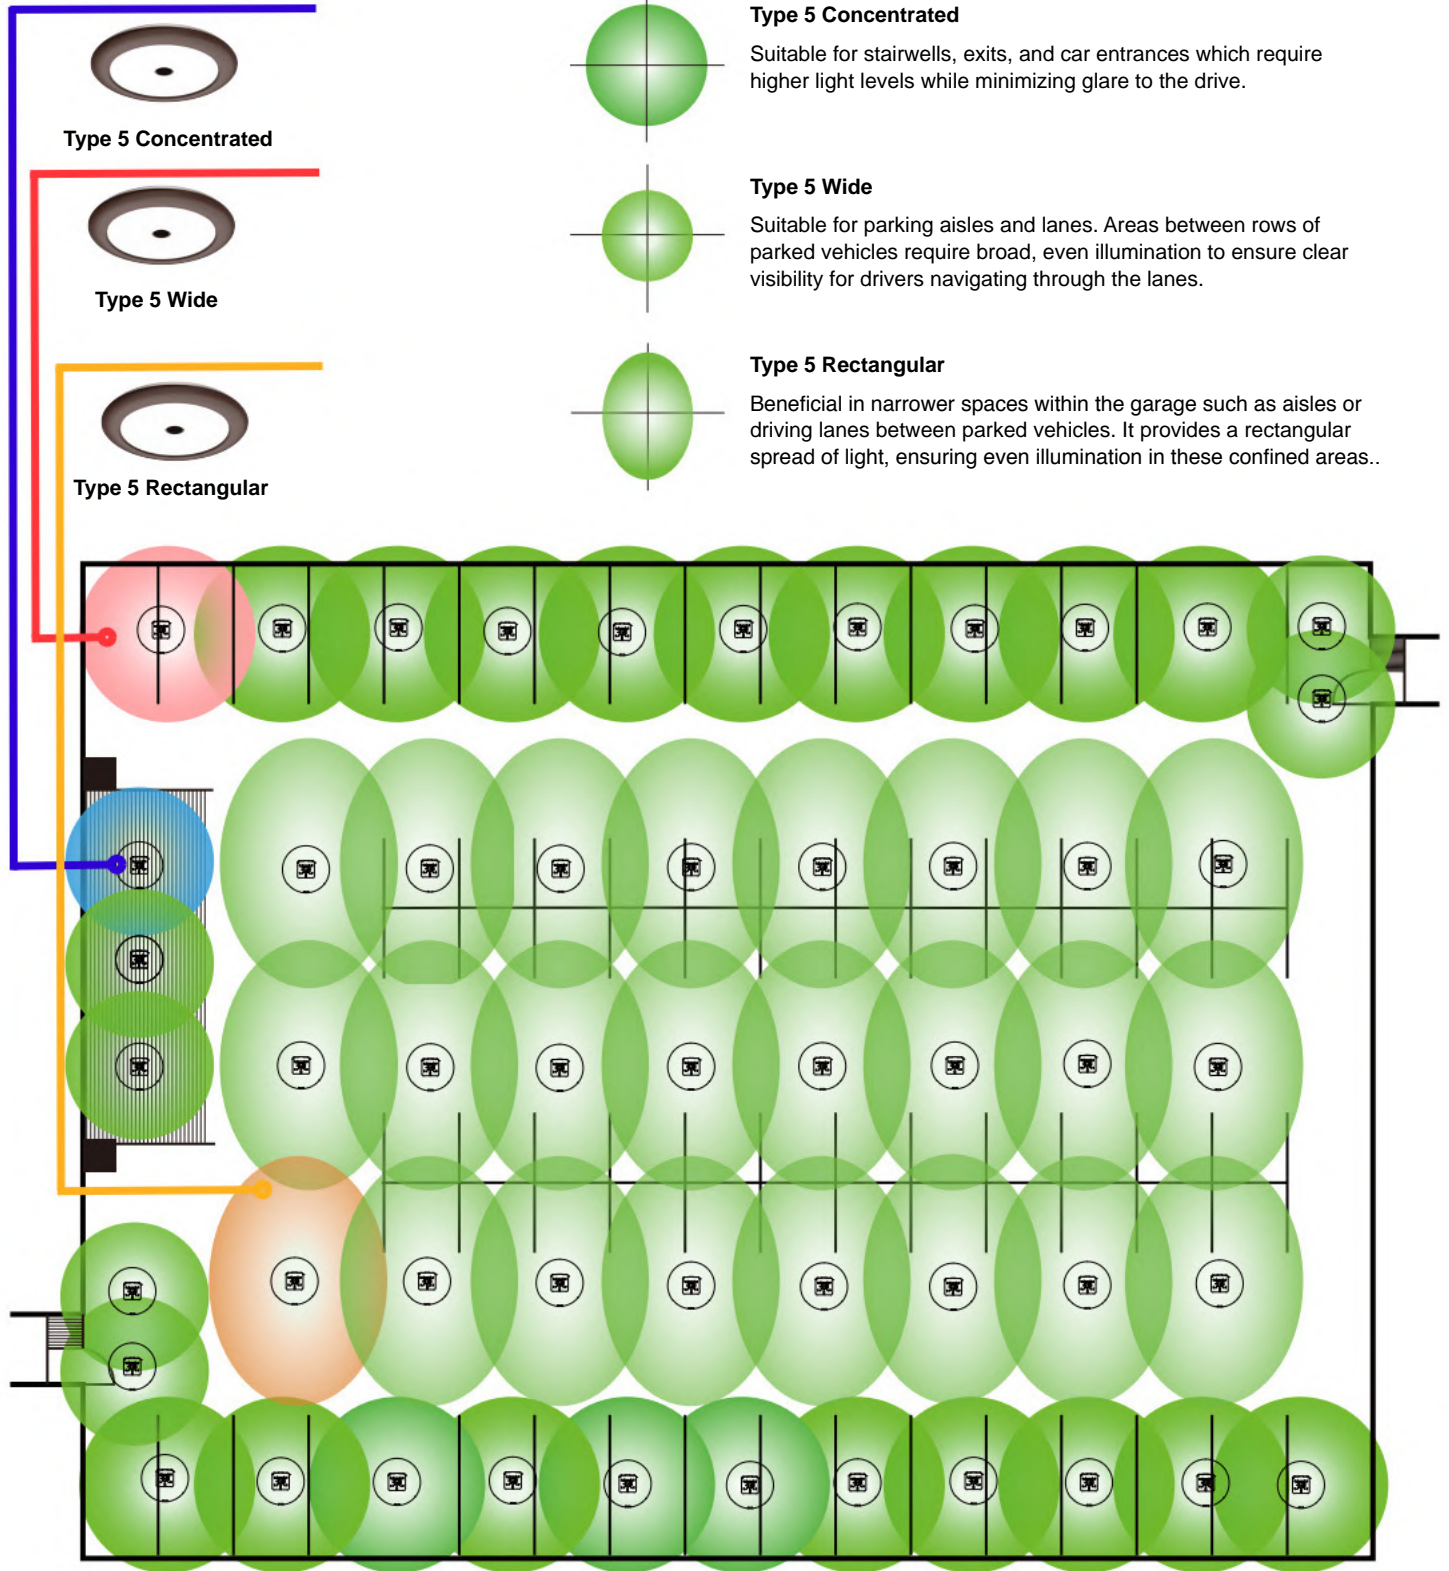


GR20

Garage Round 20" Diameter Luminaire
Selectable LED Wattage / CCT
RoHS Compliant / Wet Location

We reserve the right to revise the design or components of any product without notice.


CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

PHOTOMETRIC DIAGRAMS

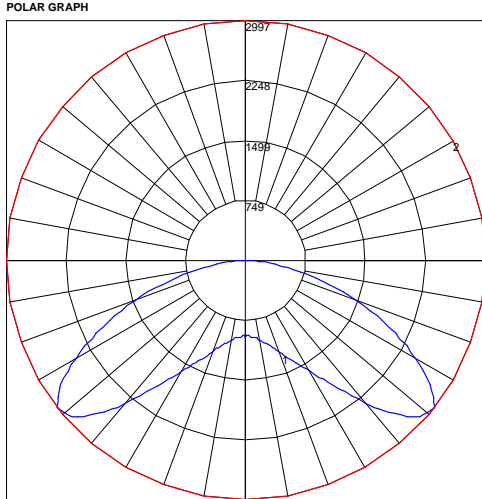

Maximum Candela = 2997.4 Located At Horizontal Angle = 0, Vertical Angle = 52
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (52) (Through Max. Cd.)

Model No. GR20-SLED-L-80W-SCCT-5K-5W-UNV

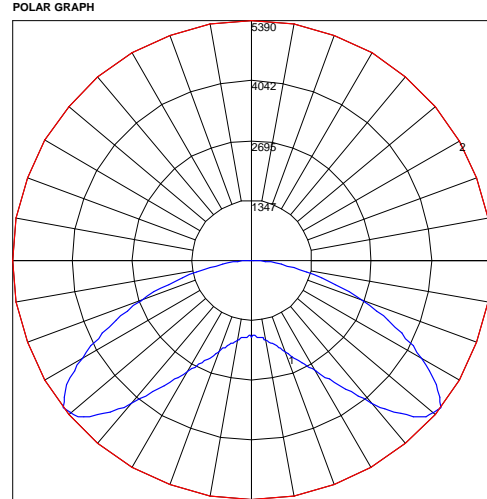

Maximum Candela = 5389.72 Located At Horizontal Angle = 0, Vertical Angle = 52
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (52) (Through Max. Cd.)

Model No. GR20-SLED-H-150W-SCCT-5K-5W-UNV

PHOTOMETRIC DATA

MODEL NUMBER	LUMENS	LPW	WATTAGE	BUG RATING
GR20-SLED-L-40W-SCCT-5K-5W-UNV	5220.3 Lumens	102 LPW	41.7W	B2-U0-G1
GR20-SLED-L-60W-SCCT-5K-5W-UNV	7734.52 Lumens	128 LPW	60.3W	B3-U0-G1
GR20-SLED-L-80W-SCCT-5K-5W-UNV	10,143.9 Lumens	128 LPW	79.4W	B3-U0-G2
GR20-SLED-H-100W-SCCT-5K-5W-UNV	12,601.2 Lumens	127 LPW	99.6W	B3-U0-G2
GR20-SLED-H-120W-SCCT-5K-5W-UNV	15,063.5 Lumens	127 LPW	118.6W	B3-U0-G2
GR20-SLED-H-150W-SCCT-5K-5W-UNV	18,240.3 Lumens	123 LPW	148.6W	B4-U1-G2