

CMK Series

SMALL BASIC VANDAL RESISTANT Retrofit Cover for Existing Recessed Fixture

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- APPLICATIONS— Eaves, Breezeways, Canopy, Soffit, Stairwell.
- DRIVER — Universal Voltage (120-277v) Electronic Driver with 0-10V dimming.
- FINISH — Frame is Phosphate Pre-Treated and Finished in Oven Baked White Polyester Powder Coat.
- FRAME — Heavy Gauge Aluminum—Die Formed and Spot Welded Construction.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED).
- LENS — .125" Thick Prismatic Polycarbonate Lens is standard. DP (CMK). Standard Drop Pyramidal. Please Specify DP or DS in Options section of ordering information.
- LENS FASTENERS — Heavy gauge Cold Rolled Steel retaining angles attached to thru Door Studs for Positive Lens Clamping.
- MOUNTING — Standard Semi-Recessed Mounting. Allow 4" Depth for SR Box for Driver.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for Damp Locations—Retrofit Electric Lighting Fixture. **Made in USA / Buy America Compliant / Buy American Act.**
- WARRANTY — Standard 5 Years, defects and workmanship.

*Consult Factory for Extended Conditional Warranty.



Drop Pyramidal (DP) Lens - Standard

ORDERING GUIDE:	Series	Size	LED Wattage	CCT	Voltage	Finish	Options

SERIES

- CMK = CMK Series
- CMK-NE = CMK Non-Electrical Series - Cover Only w/Diffuser
— Indicate Size & Lens as Complete Catalog #
Example: CMK-NE-L-DP

SIZE (Nominal)

- S = Small - 12-1/2" Square x 3" Depth
- M = Medium - 13-1/2" Square x 3" Depth
- L = Large - 15-1/2" Square x 3" Depth

LED WATTAGE

- CMK Small (S)
- LED15 = 15 Watt LED

CMK Medium (M) / CMK Large (L)

- LED25 = 25 Watt LED
- LED35 = 35 Watt LED

LED COLOR TEMPERATURE (CCT)

- 3K = ±3000K Range LED
- 4K = ±4000K Range LED
- 5K = ±5000K Range LED

VOLTAGE

- 347 = 347 Volts
- UNV = Universal Volt (120-277v) Driver

FINISH

- BK = Black Finish
- BZ = Bronze Finish
- PNA = Painted Natural Aluminum
- SGR = Silver Gray
- WH = White Finish — STANDARD
- CC = Custom Color (Visit www.ralcolor.com)
— Provide RAL# or Make-to-Match Color Chip

LENS OPTIONS

- DP = Drop Pyramidal — STANDARD
- DS = Shallow Drop Square

DIMMING OPTIONS

- NOTE: 0-10V 100%-30% is Standard
- D7A = 0-10VDC LED Dimming Driver (100-10%)
- D7B = 0-10VDC LED Dimming Driver (100-1%)

MISC OPTIONS

- BB = 2" Deep Backbox (For CMK-S Only)
- FUS = Single Fusing

EMERGENCY BATTERY OPTIONS ③ ⑩ ①⑤

No onsite Emergency Power (AC or DC) is provided

- RELGTD1 = Remote Generator Transfer Device (Signify)
- RELGTD2 = Remote Generator Transfer Device (LGTD)
— Shunt Relay w/Fire Alarm Override Input

Meets California Energy Commission Title 20:
(CEC-400-2014-009-CMF) Efficiency Standards

- REL4W = Remote LED 4 Watt
- REL8W = Remote LED 8 Watt
- REL16W = Remote LED 16 Watt
- REL20W = Remote LED 20 Watt

Cold Weather Emergency Batteries:


Operating Temp: -20°C thru 50°C
NON-CEC Compliant

- REL10W-CW = Remote LED 10 Watt (Cold Weather)
- REL23W-CW = Remote LED 23 Watt (Cold Weather)

NOTES:

- ③ Consult Factory for additional Emergency options not shown.
- ⑩ Max WHIP length of the REL is 8 feet.
- ①⑤ Final selection of the Battery Pack under discretion of Factory

DIMENSIONS

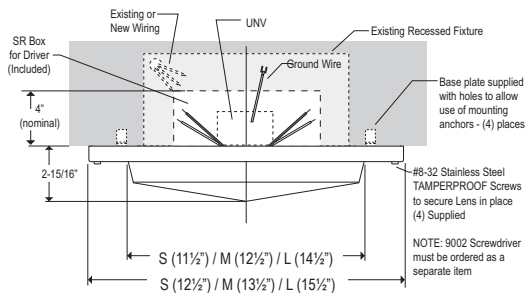

OPTIONS



Drop Square (DS) Lens & Back Box (BB) Options