

# CM12-M

## Ceiling Mount 12" Square Canopy Luminaire IP65 Rated

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

### SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver.
  - FINISH — Polyester powder-coated finish.
  - HOUSING — Impact and weather resistant die-cast housing.
  - LENS — Polycarbonate prismatic lens.
  - LIGHT ENGINE — Energy Efficient LED.
  - MOUNTING — Universal mounting plate with hook bracket for easy installation.
  - COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards.
- UL Certified, DLC listed and IP65 Rated. Suitable for Wet Locations.
- WARRANTY — 5-Year Limited Warranty.



### ORDERING INFO

Series	Wattage	CCT	Voltage	Finish	Options

#### ORDERING GUIDE:

##### SERIES

CM12-M = CM12-M Series

##### WATTAGE

LED50 = LED 50 Watt (5530 Lumens)

LED70 = LED 70 Watt (6911 Lumens)

##### COLOR TEMPERATURE (CCT)

3K =  $\pm$ 3000K range

4K =  $\pm$ 4000K range

5K =  $\pm$ 5000K range

##### VOLTAGE

UNV = Universal Volt (120-277v) Driver

##### STANDARD FINISH

BK = Black Finish

BZ = Bronze Finish

GR = Gray

SV = Silver

WH = White Finish

##### DIMMING OPTIONS

D7 = 0-10V Low Voltage Dimming




##### PHOTOCELL OPTIONS

PHOT = Photocell

##### MISC OPTIONS

SG = Surge Protection


### DIMENSIONS

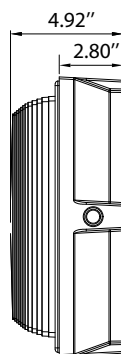

### PHOTOMETRY

#### PHOTOMETRY

Wattage = 70W  
Mounting Height=12.00 FT

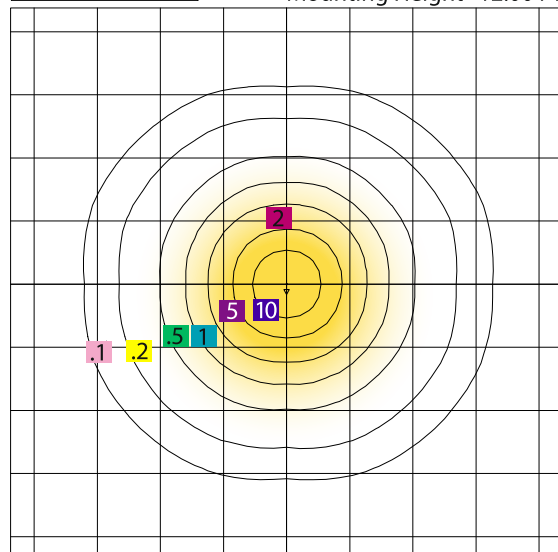

SCALE: 1 INCH = 15 FT.  
LIGHT LOSS FACTOR = 1.00

MAXIMUM CALCULATED VALUE = 16.22 FC  
FOOT CANDLE= .1 .2 .5 1 2 5 10