

# WMT Series

**Vandal Resistant Wall Pack Luminaire**  
**Tunable Wattage/CCT via Dipswitch**  
**IP65 Rated**

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## SPECIFICATIONS

- DRIVER — Universal Voltage 120/277V (50/60Hz) Electronic Driver is standard for LED.
- EMERGENCY — LED — Remote or Integral Emergency Battery. Specify Secondary Voltage.
- GASKETING — Industrial grade silicone gasket.
- HOUSING — Heavy duty die-cast aluminum.
- LIGHT ENGINE — Energy Efficient Light Emitting Diode (LED). Power Factor:  $\geq 0.95$ . Ra > 70.  
LED Wattage can be adjusted to: 25%/50%/75%/100%. CCT can be adjusted to: 3K/4K/5k
- LENS — Borosilicate Molded Glass.
- LIFETIME — >50,000Hrs.
- MOUNTING — Wall Mount.
- OPERATING TEMP — -22°F to +122°F (-30°C to +50°C).
- SURGE PROTECTION — Line-earth 2KV / Line-Line 4KV
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards. UL/cUL, cETL/ETL, DLC Listed. IK08 Rated. IP65 Rated - Suitable for Wet Locations.
- WARRANTY — 5-year Limited Warranty.



**ORDERING GUIDE:**

Series	LED Wattage	CCT	Voltage	Finish	Options

### SERIES

WMT = WMT Series

### LED WATTAGE

Note: Wattage can be adjusted to 25%/50%/75%/100%

LED30 = 30 Watt LED (Replaces 100W HID)

— Tunable Watts: 7.5W | 15W | 22.5W | 30W

LED60 = 60 Watt LED (Replaces 200W HID)

— Tunable Watts: 15W | 30W | 45W | 60W

### LED COLOR TEMPERATURE

SCCT = Selectable CCT: 3000K | 4000K | 5000K

### VOLTAGE

347 = 347 Volts

480 = 347 Volts

UNV = Universal Volt (120-277v) Driver

### FINISH

BZ = Bronze Finish

### DIMMING OPTIONS

D7 = 0-10VDC LED Dimming Driver

### CONTROL OPTIONS



9328 = Photocell Button (120/277V)

OCC = Occupancy Sensing | Motion Sensor Integral

— Microwave / Single Feed / 120/277V Only

— Standby Dim Level Presets: ON/OFF (0%/100%)

## DIMENSIONS

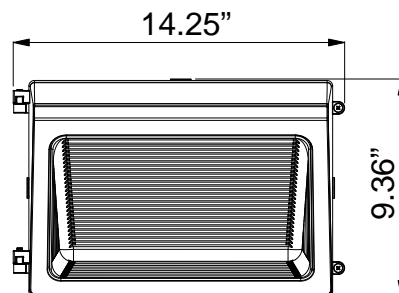


# WMT Series

*Vandal Resistant Wall Pack Luminaire  
Tunable Wattage/CCT via Dipswitch  
IP65 Rated*

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## WATTAGE / CCT DIPSWITCH

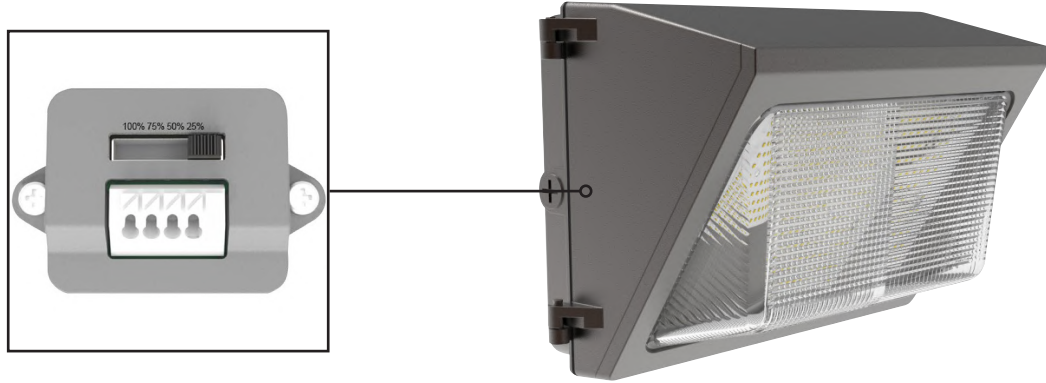

DIP Switches installed inside driver compartment allows you to switch between wattages and CCT.

## TUNABLE WATTAGE



25%



50%



75%



100%

## TUNABLE CCT



3000K



4000K



5000K