

GARAGE SERIES: 2020

ECLIPSE LIGHTING



Eclipse Lighting is a **US manufacturer** of a broad line of affordable, award-winning architectural LED fixtures for indoor and outdoor applications.

The Eclipse aesthetic begins with clean styling incorporated into a modular family of luminaires resulting in a selection of more than 200 designs that compliment any space.

APPLICATIONS

Canopy | Commercial Property | Design Build | Facilities Natatoriums | Parking Structures | Public Spaces







ECLIPSE GARAGE SERIES



BENEFITS

Competitively priced 10-year Warranty High Efficiency

STANDARD FEATURES

Easy to install
Easy to service
Visual comfort
Thermal management
Uplight







DENALI



LED Multi-Purpose Surface Mount Pendant Luminaire

Power

35 to 100 Watts 3K to 5K LED Color Temps

Engineering

Black, Bronze, Custom, Painted Natural Aluminum or White Pendant Mount

Controls

Motion Sensor Dimmable

BAA Compliant Integral Battery Back-up



HBA3



LED High Bay Smart LuminaireIntegral Wi-Fi Mesh Network Controller

Motion Sensor / Daylight Sensor

Power

50 to 180 Watts 3K to 5K LED Color Temps

Engineering

Black, Silver or White Hook, Adjustable Bracket, Aircraft Cable Mount, Indirect, Pole, or Pendant Mount

Controls

Motion/Daylight Sensor Dimmable

DLC Listed Integral Battery Back-up



PG14 Parking Garage Canopy



14" LED LUMINAIRE

Vandal Resistant IP65 tested and approved

Power

45 or 70 Watts 3K to 5.6K LED Color Temps

Engineering

Bronze or White Pendant mount or Trunnion mount bracket

Controls

Bluetooth Enabled with TelleLight System Dimming/Sensor Options Occupancy Sensing | Bi-Level Dimming

DLC Listed Quick Ship Item 5-Year Limited Warranty



PG12 Parking Garage Canopy



12" LED LUMINAIRE

Vandal Resistant IP65 tested and approved

Power

40 or 60 Watts 3K to 5.7K LED Color Temps


Engineering

Bronze or Epoxy coating for Natatoriums Pendant mount or Trunnion mount bracket

Controls

Bluetooth Enabled with TelleLight System Dimming/Sensor Options Occupancy Sensing Bi-Level Dimming

DLC Listed Quick Ship Item 5-Year Limited Warranty

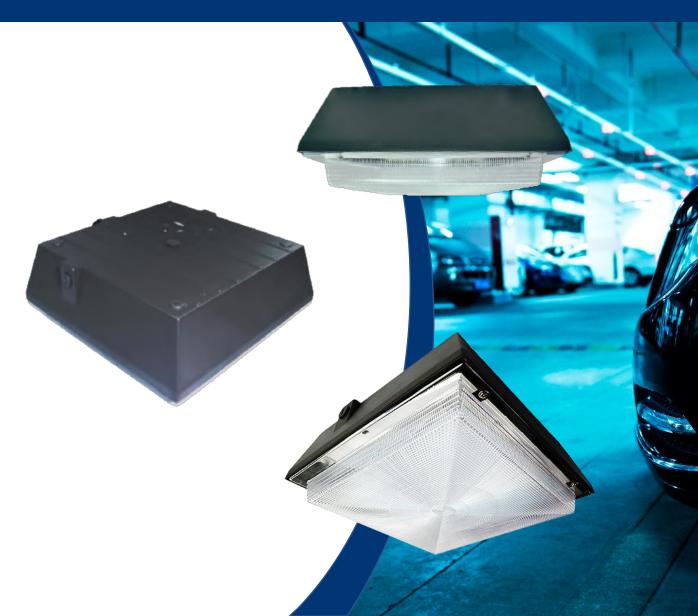

GR13 SERIES



Garage 13" Diameter Luminaire
Unique Ring Design
Wet Location

Power

67 or 97 Watts 4K or 5K LED Color Temps

Engineering

Black Finish Hook, Pendant or Surface Mount (via Adjustable Bracket)

Controls

PIR Occupancy Sensor

Emergency

16W (2000lm) Battery Backup / 90min



GR13W SERIES



Garage 13" Diameter LuminaireUnique Ring Design / Uplight Illumination RoHS Compliant / Wet Location

Power

45, 60, 70, or 100 Watts 4K or 5K LED Color Temps

Engineering

White Finish Standard (Optional Black, Bronze, Silver)
Pendant or Surface Mount (via Quickmount Plate)

Controls

PIR Occupancy Sensor

Emergency

Remote Emergency Battery



GR16 SERIES



Garage 16" Diameter Luminaire

Low Glare / Edge Lit Design IP65/IK08/3G Vibration

Power

32 to 90 Watts 3K to 6.5K LED Color Temps

Engineering

White Ceiling, Pendant or Trunnion mount bracket

Controls

Occupancy Sensor Dimmable

DLC Listed Integral Battery Back-up



GR18 SERIES



Garage 18" Diameter LuminaireHigh Performance / Shallow Profile Design NSF / ROHS Compliant

Power

60 to 75 Watts 3K, 4K, or 5K LED Color Temps

Engineering

White Hook, Pendant or Surface Mounting

Controls

Occupancy Sensor Dimmable



GR18G SERIES



Garage 18" Diameter Luminaire High Performance / Shallow Profile Design Low Bay HID Replacement

Power

36, 64, or 71 Watts 3K, 4K, or 5K LED Color Temps

Engineering

Black, Bronze, Silver, White Finishes Pendant or Surface Mounting

Controls

Occupancy Sensor Dimmable

Emergency

Integral Emergency Battery



VTA Vaportight



2' or 4' LINEAR LED LOW BAY LUMINAIRE

Weather Resistant
Made in the USA | ARRA Compliant
IP67 rated

IP69 Rated with Parking Garage Polycarbonate/Acrylic Lenses.
NSF International Certified (NSF/ANSI 2 - Food Equipment).
Compression molded self-extinguishing fiberglass reinforced polyester housing with UL 5V flame rating and F1 weatherability.
Continuous perimeter poured gasket assures lens seal to housing.
Choose from 5 lens types and latch options.

Controls

Bluetooth Enabled with TelleLight System

Dimming Sensing Options

Bi-Level 0-10V Dimming Motion Sensor



VTC-S Vaportight



LINEAR LED

Made in the USA | BAA Compliant
Vandal resistance enclosure
NSF International Certified
IP67 Tested and Rated
5VA Fiberglass housing
Ribbed shallow lens is impact resistant frosted acrylic.
DLC Listed

Controls

Bluetooth Enabled with TelleLight System

Dimming/Sensing Options

Occupancy Sensing Bi-level Dimming Bi-Level Switching

Emergency Battery Option 5-Year Limited Warranty



TelleLight SR-Series



THE PINNACLE OF LIGHTING CONTROLS TECHNOLOGY

The cutting-edge convergence of Eclipse LED Fixtures, Bluetooth Mesh, Wireless Sensors, and Controls, plus Control software, taking your project to a new level of energy efficiency, performance, and quality management.

Ease of installation and use.

Adds new levels of flexibility, energy efficiency, management and quality.





GARAGE SERIES: 2020